


Introduction

Dear customers, partners and agents, with this newsletter, we want to show you how flexibly the TRIKNO demoulding solution can be adapted to different products and production lines.

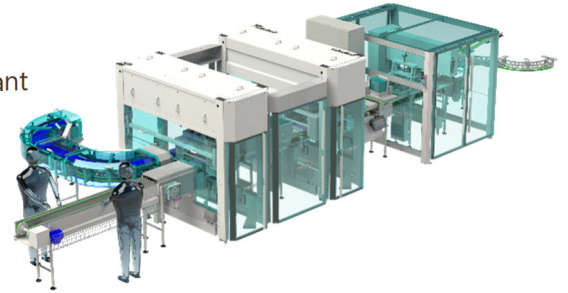

TDS – TRIKNO Demoulding System

One Platform. Multiple Options.

The modular TRIKNO demoulding system is able to gently, precisely and reliably remove or unmould a wide range of products and subsequently deposit them back onto the conveyor, onto plaques, or directly into their packaging. Each solution is configured specifically to fit your application, and your specific production line.

Maximum Customisation and Precision

Different demoulding concepts are available depending on the product and process requirements: from a simple knocking station up to particularly product-friendly, vacuum demoulding.

The system is engineered for maximum performance, to reduce product losses, minimise downtime and ensure consistent product quality.

Positioning accuracy:
<0.1 mm / cavity

Mould width up
to 1200 mm

Speeds up to 24
moulds / min

Your Benefits

- Gentle product demoulding, even for complex product geometries
- Compact design
- System tailored to your application
- High process reliability

As Versatile as Your Products

Your finished and cooled products can be demoulded in three different ways:

Back onto a conveyor, deposited onto plaques, or placed directly into blister packs for transfer to the packaging line.

Whether it is pralines, on-shot spheres, small napolitains, bars, blocks, lollipops, shells, macarons or other products, we can put together the right solution for your requirements.

Demoulding System Components

Component / Tool	Function
Indexing unit / pusher into indexing chain	Transfers moulds from the main conveyor line onto the indexing conveyor
Indexing conveyor	Indexed conveying for gentle demoulding
Twister	Releases products from the moulds
Plaque inserter	Inserts plaques for onward transport of demoulded products
Pick'n'Turn product inverter	Vacuum-lifts products from the moulds, and rotates them
Pick'n'Place product transfer unit	Transfers rotated products onto plaques, conveyors or blisters
Pitch-changing / transfer tool	Adjusts differing product pitches between the mould layout and packaging format
Vacuum unit	Generates the vacuum required for Pick'n'Turn and Pick'n'Place operations
Mould inverter (with plaque)	Rotates moulds for demoulding onto plaques
Tapping unit	Ensures complete separation of products from the moulds
Mould inverter (without plaque)	Rotates empty moulds back into the filling position
Lid opener with pin plate	Opens two-part moulds, e.g. for one-shot spheres
Book mould opener and inverter	Opens moulds for book-mould products, e.g. hollow eggs
Belt conveyor for plaques with products	Discharge conveyor for finished products
Product conveyor (fabric belt)	Hygienic conveyor belt for gentle product handling and transport.

Customer Testimonials

"We were particularly impressed by the system's flexibility. The demoulding solution was customised to our products and existing production line, enabling us to cover a wide range of applications with one modular solution."

"Gentle demoulding and reliable output were decisive factors for us. Specially with our demanding products, we were able to reduce product losses while maintaining a stable production process."

One Platform – Multiple Options

Whether as part of a new moulding line for applications ranging from conventional chocolate products to products with large inclusions, or as an integration into an existing production line, the TRIKNO Demoulding System is configured specifically to fit your application.

Modular. Precise. Future-Ready.

Are you planning a new application or looking to further automate your existing line? Contact our experts—we will engineer the right demoulding solution for your application.

Next trainings at "TRIKNO depositing Experts":

Sept. 22/23, 2026: One Shot Advanced

May/June 2027: One Shot Basic