




# Technical Data Sheet THS Handling System

Gearless linear servo robot system for all handling operations in a single sheet line with a precision better than 0.1 mm. Edge trimming, base stripping and demoulding of products, insertion of products in a final pack. Handling System: the ultimate low-maintenance "pick-and-place" robot for limitless flexibility.

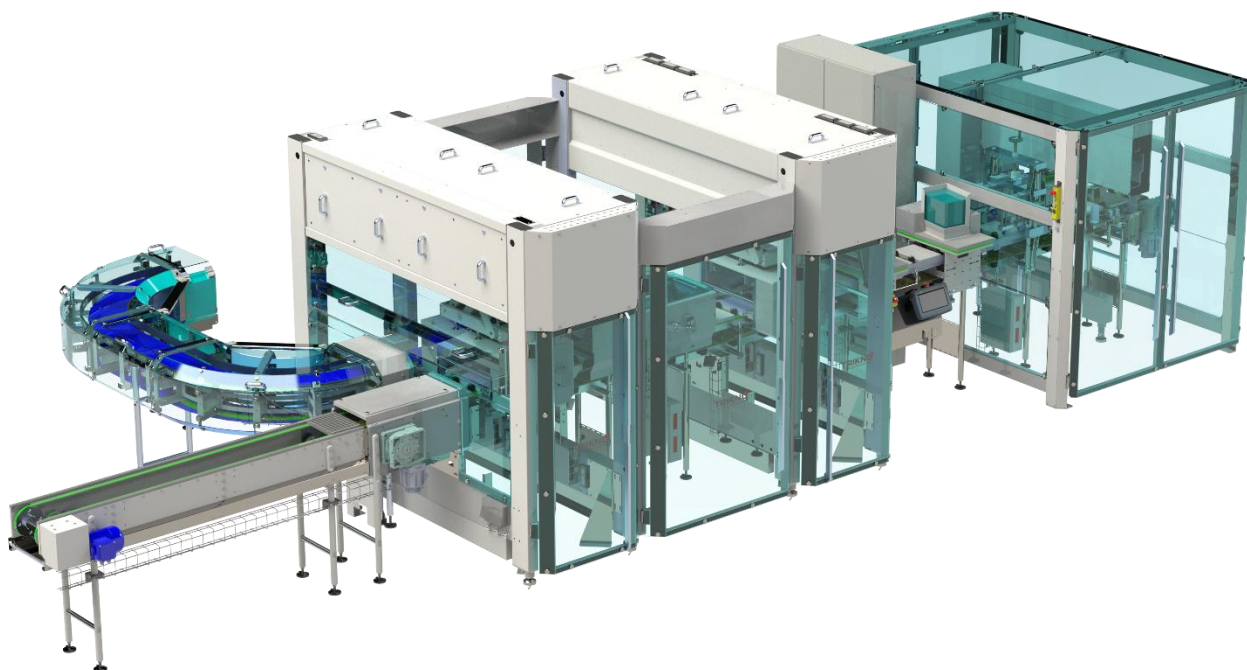


## Features


- Computer-controlled monitoring of moulds up to mould widths of 1200 mm (Dimensions in the image above show an example with a mould width of 275 mm)
- Very high precision over the entire travel: positioning accuracy of < 0.1 mm / cavity
- Very long travel distances up to 6 m
- Very high lifting capacities of up to 500 kg or 1,000 kg (with full travel precision)
- Gearless
- Maintenance-free
- Accelerations up to 7 G
- Absolutely parallel feeds with full power
- Low noise
- Speeds of up to 24 molds/min
- 15" colour touchscreen of the line with resolution 1024×769 pixels
- Working height from 950 to 1'050 mm

## Options

- Execution of the product demoulding
  - Knocking station
  - Vacuum station (gentle even with more complex product geometries)

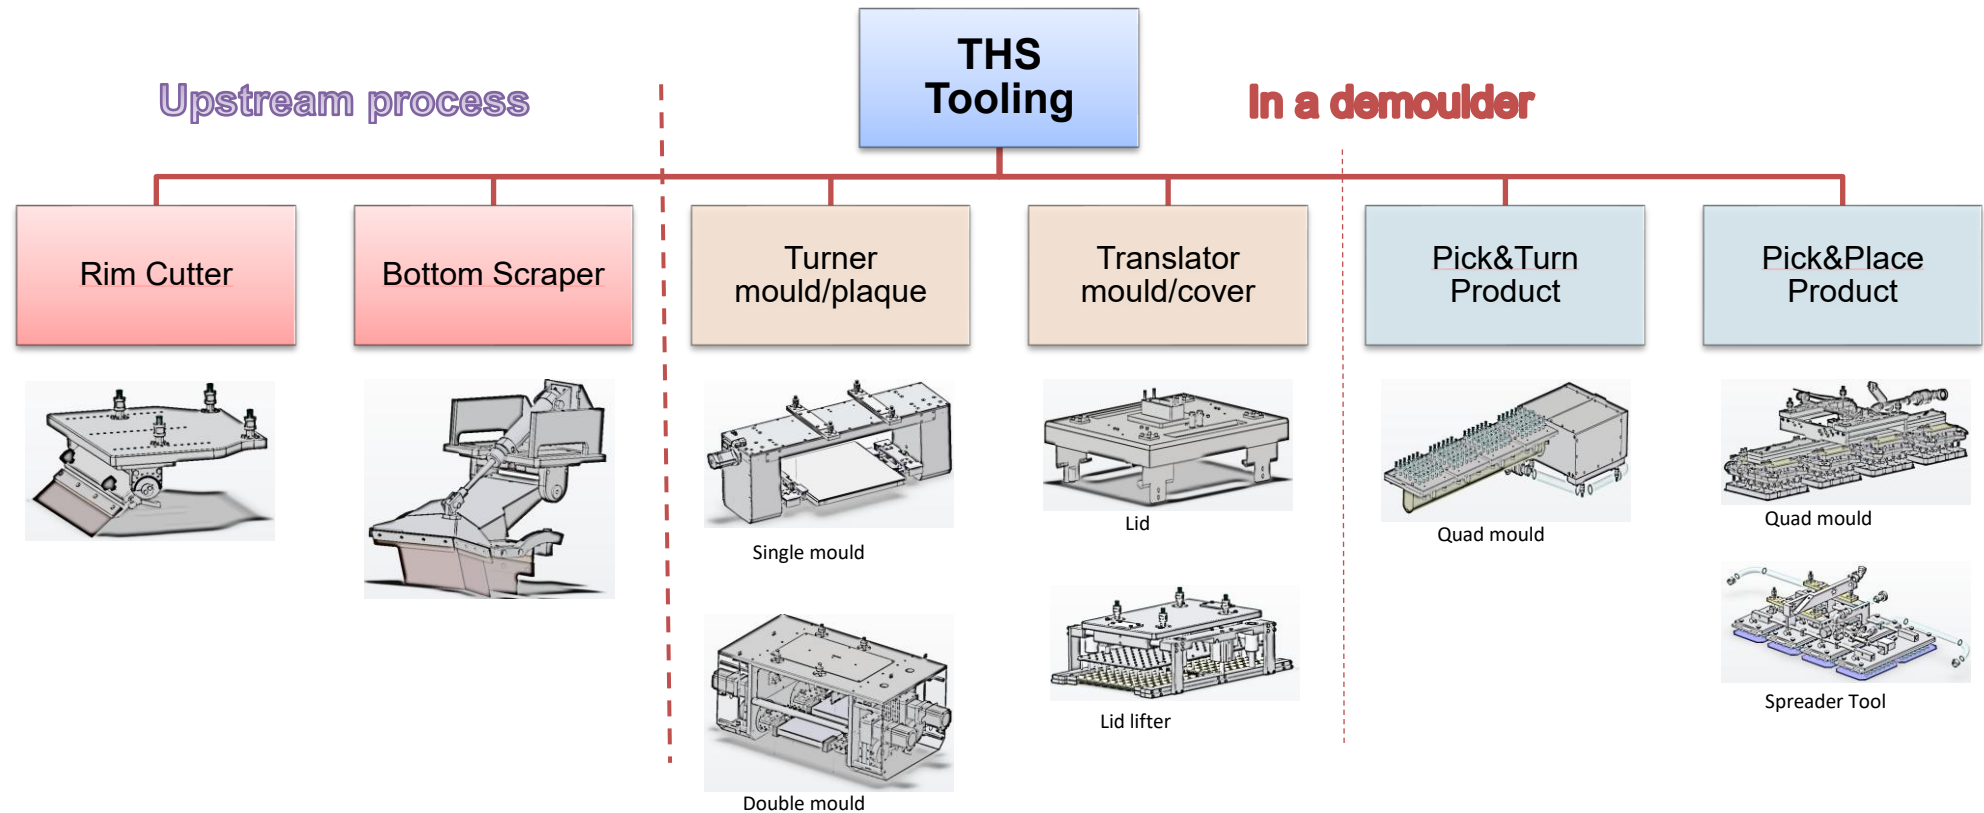

| Tool                            | Area of application                                                 |
|---------------------------------|---------------------------------------------------------------------|
| Rim cutter                      | Cuts the excess ColdPress 1.0 material from the moulds              |
| Bottom scraper                  | Transfers the excess material into a tank                           |
| Mould Turner (with plaque)      | Turning the moulds for moulding on plaques                          |
| Mould Turner (without plaque)   | Empty moulds are turned back so that they can be refilled           |
| Lid opener with nail plate      | Opening of two-piece shapes, e.g. with One Shot balls               |
| Bookmould Opener+Turner         | Opening the moulds of Bookmould products, e.g. hollow eggs          |
| Pick'n'Turn Product Turner      | Products are sucked out of the moulds (vacuum) and rotated          |
| Pick'n'Place Product Translator | Twisted products are transferred to plaque/tape/blister             |
| Spreader Tool / Translator      | Adjust different product spacing between mould layout and packaging |

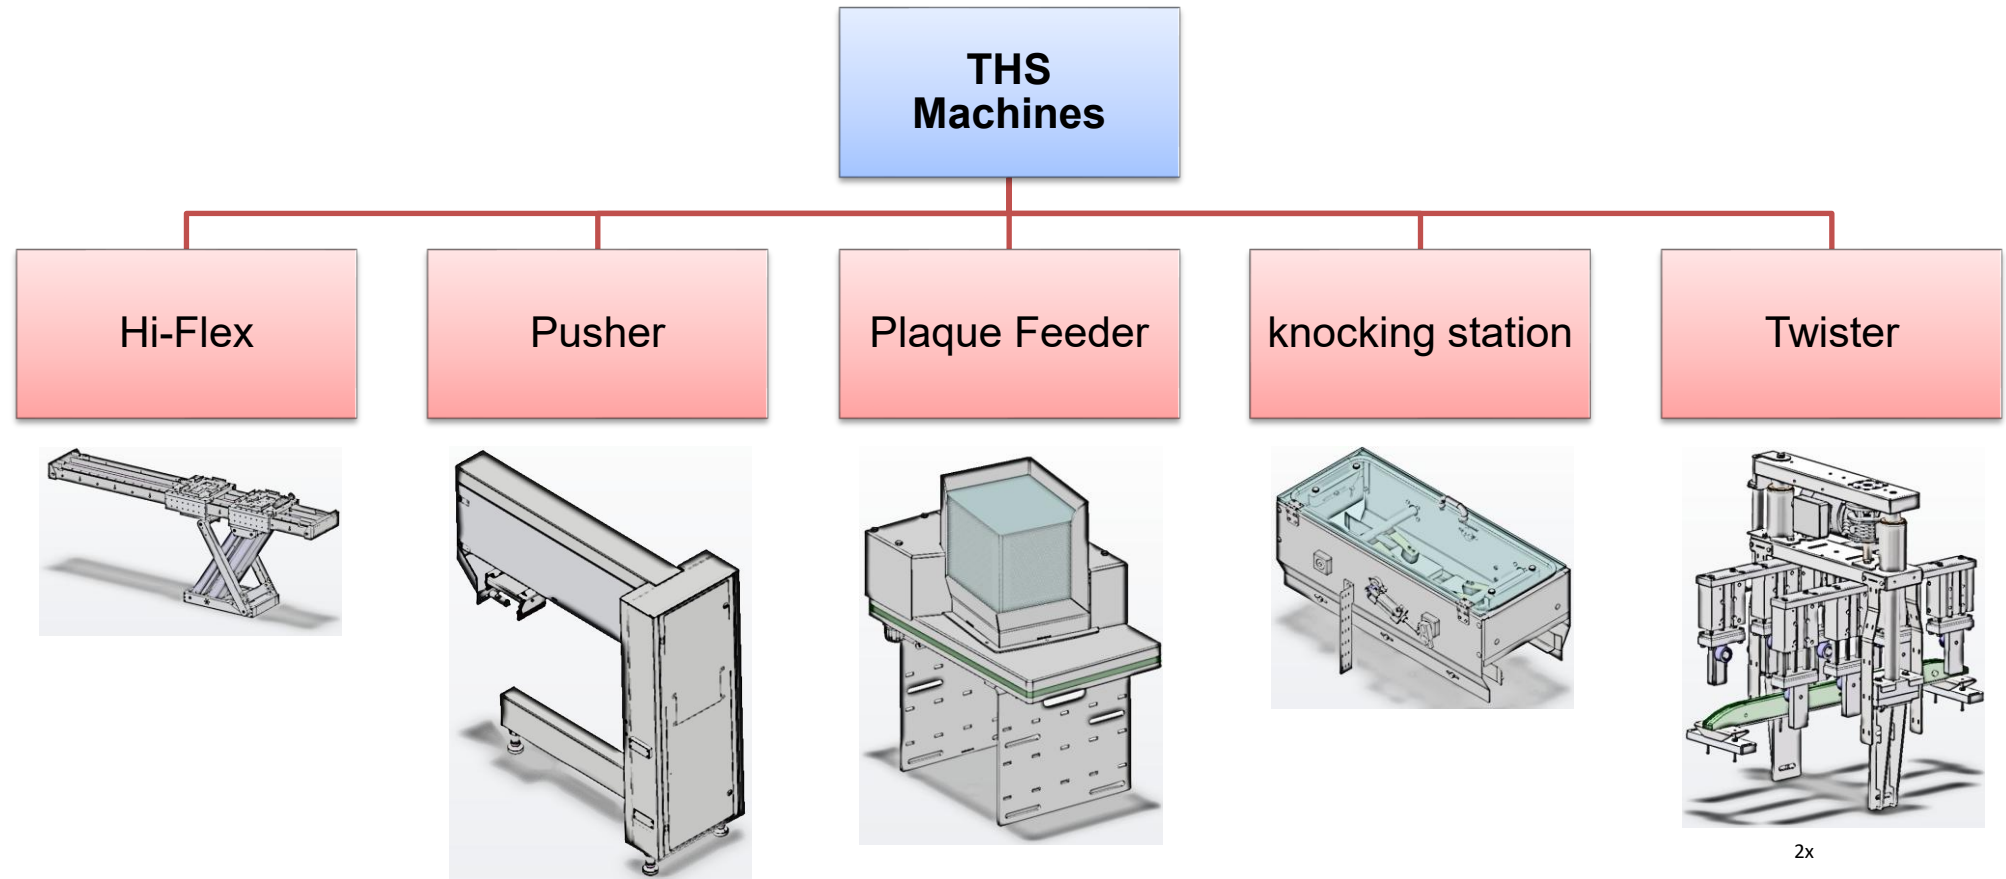

| Tool             | Area of application                                                        |
|------------------|----------------------------------------------------------------------------|
| Hi-Flex          | Servo-driven linear module (basic unit for THS tooling)                    |
| Pusher           | Passing the moulds from the line belt to the indexing belt                 |
| Plaque Feeder    | Plaques are used for the further transport of the formed products          |
| Knocking station | The twisted moulds are tapped so that the product detaches from the mould  |
| Twister          | Diagonal twisting of the mould so that the product detaches from the mould |