

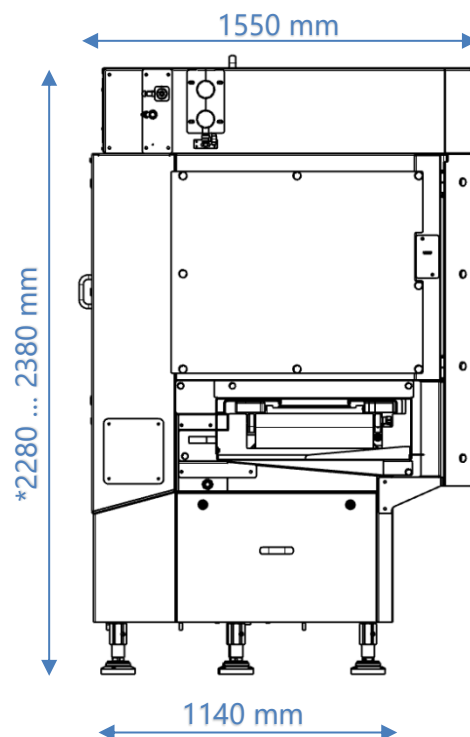
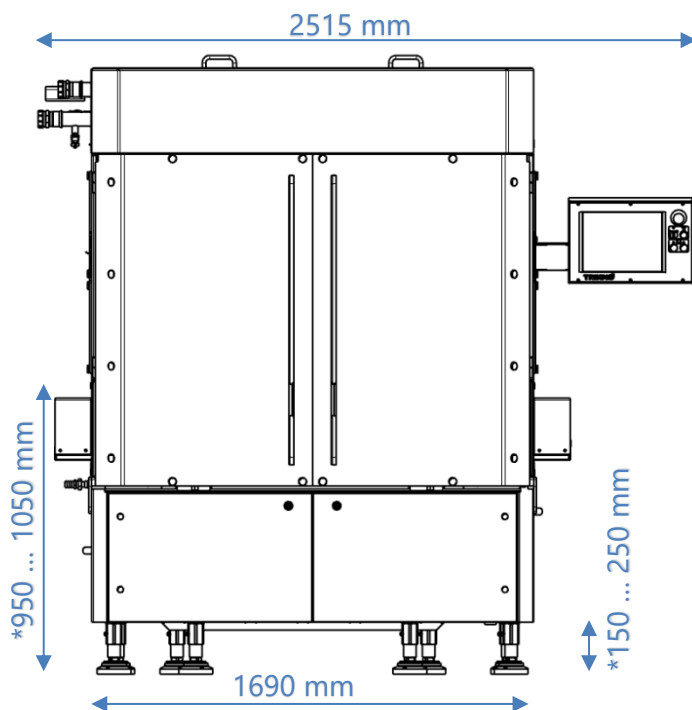


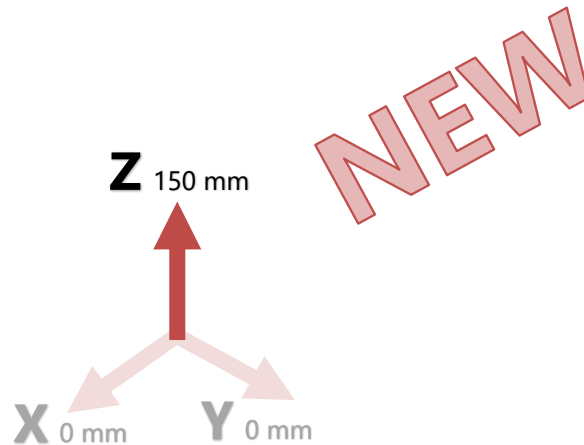

Technical Data Sheet TCP Cold Press

Machine with proven Z-stroke drive, powered entirely by electric servo motors.
Wide range of shells possible.

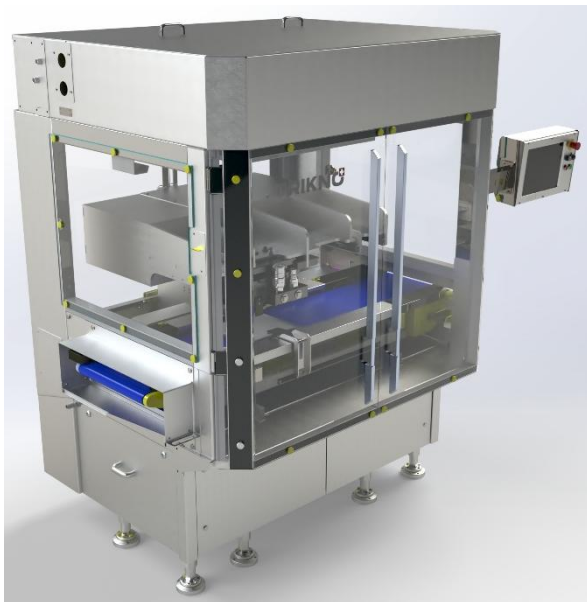

* Dependent on each other

	TCP 275	TCP 380	TCP 500	TCP 650
Mould widths	175 ... 275 mm	... 380 mm	... 500 mm	... 650 mm
Weight	1500 kg	1650 kg	1800 kg	2000 kg



Features ColdPress 1.0

- Head movement in Z-axis 150 mm by means of electric servo motors
- Each cavity with 100% the same weight
- Proven for more than 20 years
- Mould centring can be easily adjusted
- Safety casing sealed for minimal cold loss
- Easy cleaning of the ColdPress without additional tools
(Stainless steel or aluminium in ALTEF® coating – for pH values 4 ... 8)
- 15" touch screen HMI for machine operation
- Fully digital machine control
- Remote maintenance on PLC, HMI, servo drives possible
- Software designed for maximum accuracy and flexibility

Features ColdPress 2.0

- No rim-cutter necessary, as form-fitting edge geometries
- Inequalities in depositing accuracies are compensated by compressed air cushioning
- No need for a 2nd ColdPress for book-moulding
- Head movement in Z-axis 150 mm by means of electric servo motors
- Quick changeover of different press tools
- Mold centring can be easily adjusted
- Safety casing sealed for minimal cold loss
- Easy cleaning of the ColdPress without additional tools
(Stainless steel or aluminium in ALTEF® coating – for pH values 4 ... 8)
- 15" touch screen HMI for machine operation
- Fully digital machine control
- Remote maintenance on PLC, HMI, servo drives possible
- Software designed for maximum accuracy and flexibility

Variants

- Operation HMI Left or Right
- Belt running direction from left to right or from right to left
- LAN or Wi-Fi modem
- Number of press plates 1 or 2

Possible applications



- Shells in various sizes and shapes
- With or without melting rim

