



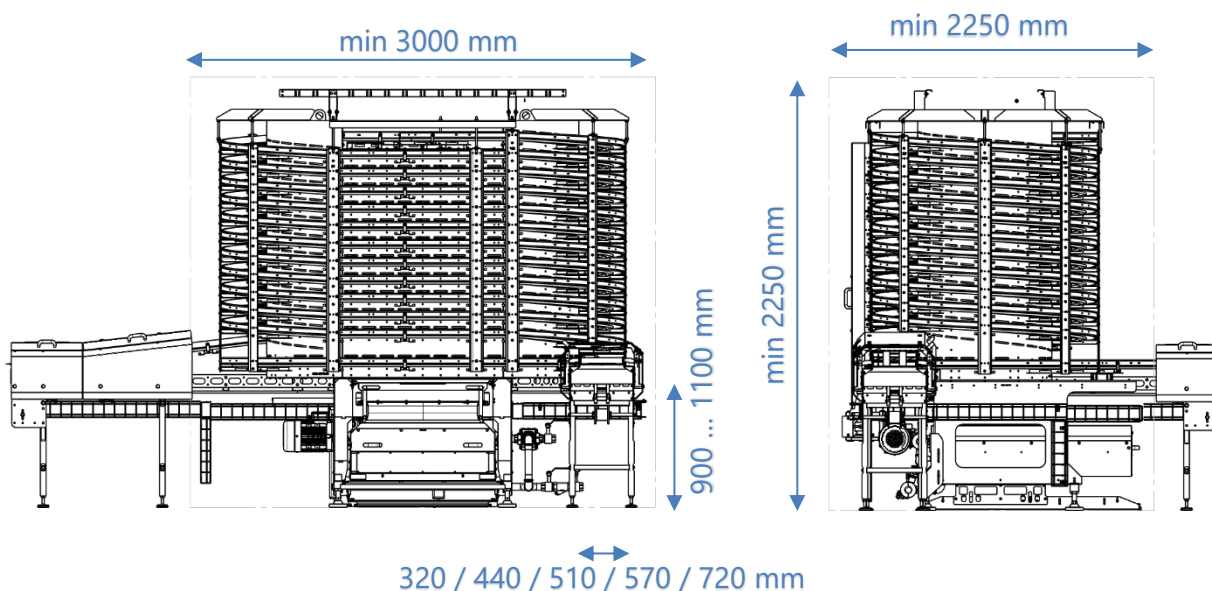

Technical Data Sheet TCS Spiral

Due to the unique, proven design of the cooling coil and the fan located on the bottom with an upstream cooling register (glycol or gas), the products can be cooled homogeneously in a compact and efficient way. Through slots in the drum, the cold air is evenly guided over the products, allowing them to experience optimal and controlled cooling. The optionally available transparent side walls allow a better insight into the process.

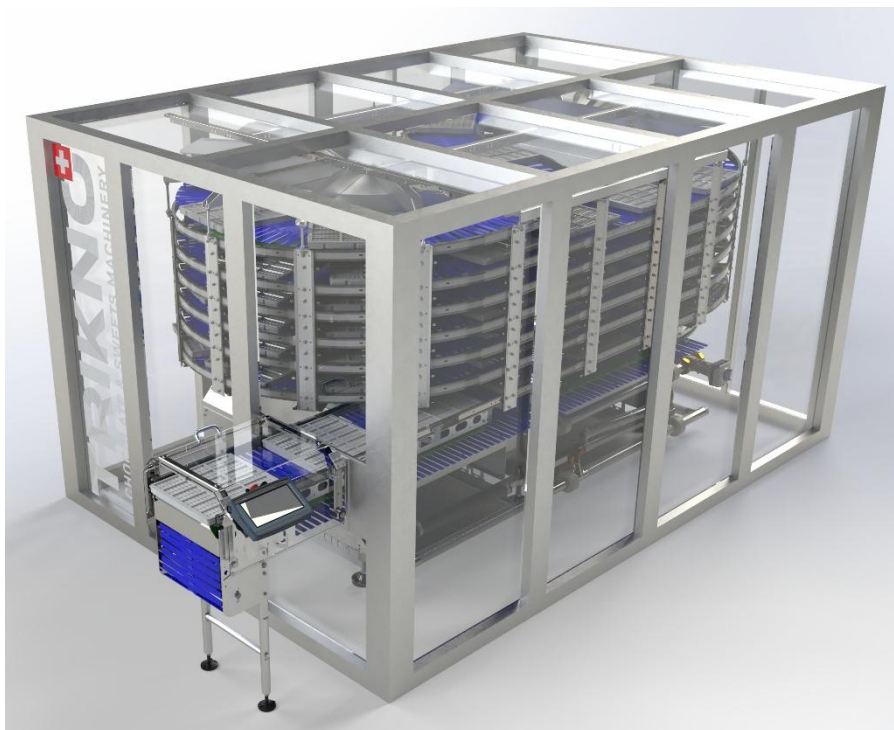

General


The spiral is the ideal transport system for shapes of any size. Thanks to the loose forming system, the moulds are transported without fastening without any problems or jams. All moulds go through the same path, which ensures uniform cooling or heating. The TRIKNO spiral is individually manufactured from standard components in any length and is suitable for both industrial and confectionery applications. The frame profiles of the insulated houses are available in plastic, aluminium or stainless steel and the basic construction is always made of stainless steel.

Characteristics


- ✓ Can be used as preheating of the moulds or as cooling of the filled moulds
- ✓ Uniform, continuous and constant cooling even for different products and shapes
- ✓ Gentle cooling (as warm, as long and as much air as possible)
- ✓ Length 12 ... 800 m is customer-specific configurable
- ✓ (Dimension depending on the mould speed, its sizes and the running speed)
- ✓ For different mould sizes up to 650 mm wide and 500 mm long
- ✓ Drive torque monitored by sensors
- ✓ Minimal risk of congestion due to the loose form principle
- ✓ Highly accessible for cleaning and maintenance
- ✓ Maintenance-free chain drives
- ✓ Low maintenance costs, as no chain tension or high spare parts costs
- ✓ Long service life of the moulds due to continuous, gentle transport movement without 90° deflections or start/stop loads
- ✓ Compact design
- ✓ No condensation (in normal operation))
- ✓ Doors can be locked individually, one equipped with a panic lock

Options

- Rubberized chain links for increased friction, so that light or smooth shapes or blisters are transported stably and reliably
- Insulated house closed (aluminium, stainless steel or plastic) or as visible (Makrolon or glass)
 - a. With lighting (blue or red)
 - b. Number of doors selectable for accessibility (see sketch a ... l)
- Length of inlet position (1) and outfeed position (2) can be defined according to customer requirements

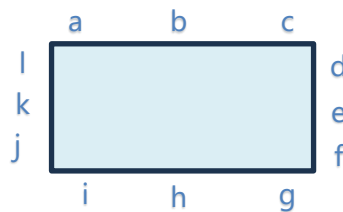

Beispiel: 1g-2l

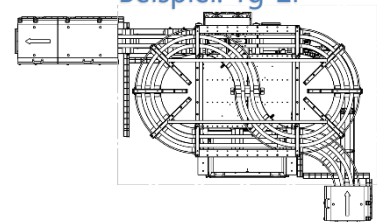

Applications



- Bars without filling
- Boards with small inclusions up to 3 mm
- Bars with whole nuts



- Filled chocolates in 2 colours (One Shot)
- Filled candy bars in 2 colours (One Shot)
- Filled chocolates in 3 colours (Triple Shot)
- Filled chocolates in 4 colours (Quadro Shot)
- Filled chocolate bars (One Shot Curtain)