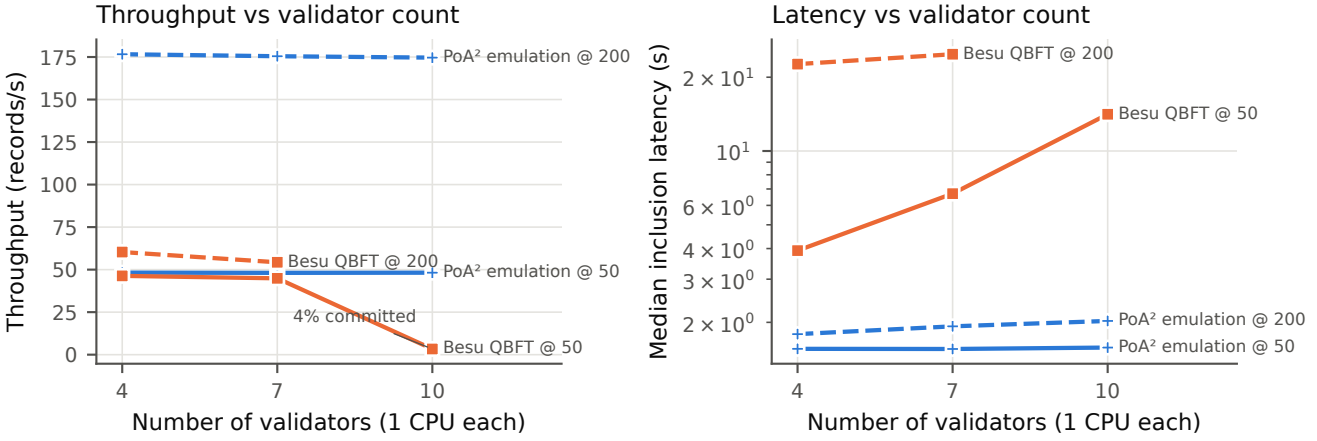
Throughput vs validator count
Throughput (records/s)
175
150
125
100
75
50
25
0
PoA² emulation @ 200
Besu QBFT @ 200
PoA² emulation @ 50
4% committed
Besu QBFT @ 50
4
7
10
Number of validators (1 CPU each)
Latency vs validator count
Median inclusion latency (s)
2 × 10¹
10¹
6 × 10⁰
4 × 10⁰
3 × 10⁰
2 × 10⁰
Besu QBFT @ 200
Besu QBFT @ 50
PoA² emulation @ 200
PoA² emulation @ 50
4
7
10
Number of validators (1 CPU each)