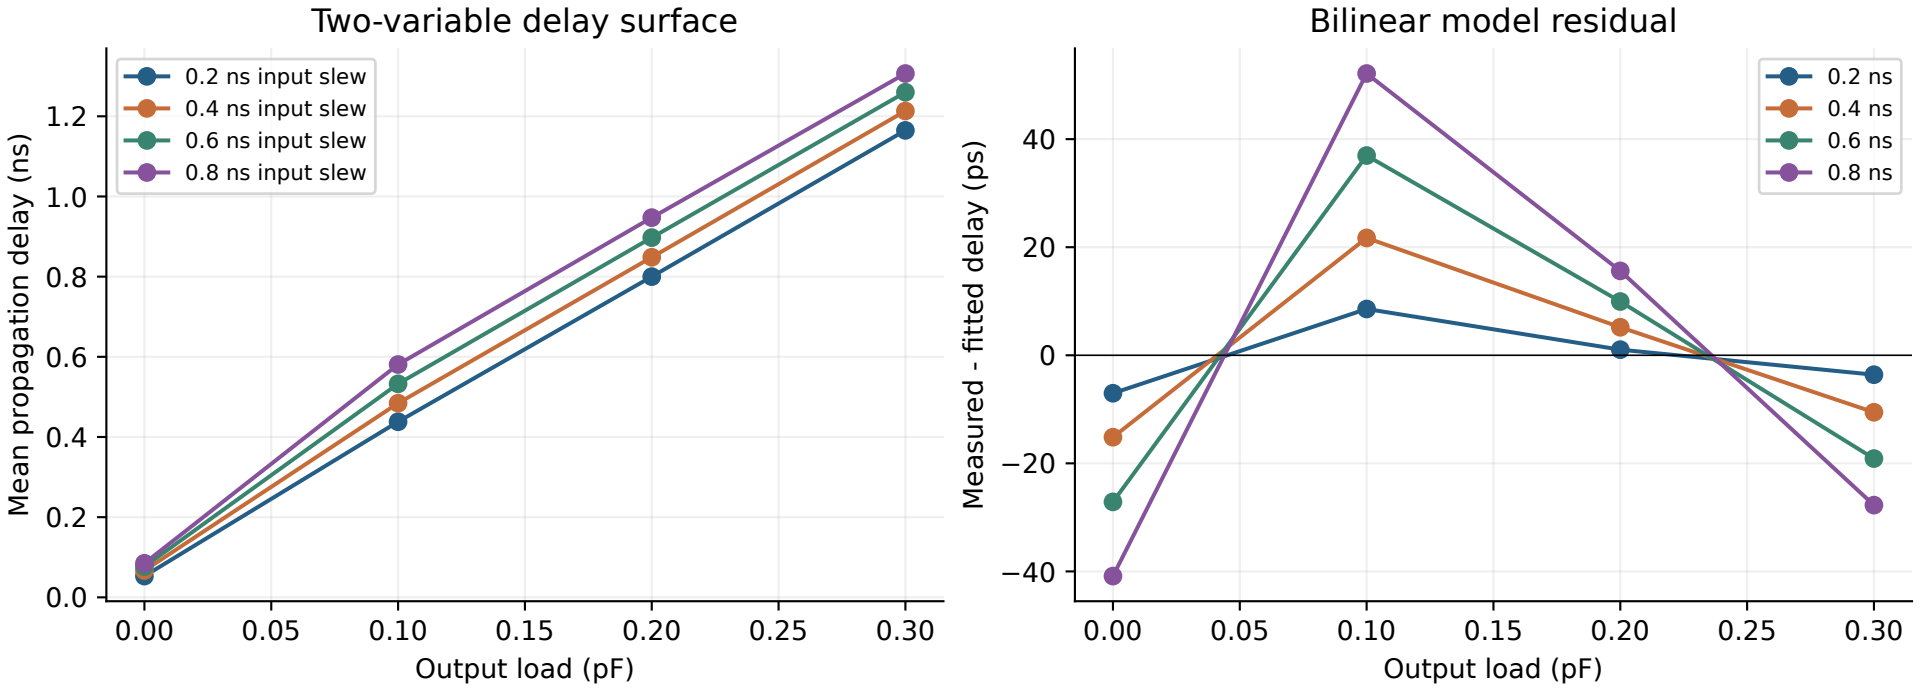
Two-variable delay surface
Mean propagation delay (ns)
Output load (pF)
0.2 ns input slew
0.4 ns input slew
0.6 ns input slew
0.8 ns input slew
0.0
0.2
0.4
0.6
0.8
1.0
1.2
0.00
0.05
0.10
0.15
0.20
0.25
0.30
Bilinear model residual
Measured - fitted delay (ps)
Output load (pF)
0.2 ns
0.4 ns
0.6 ns
0.8 ns
40
20
0
−20
−40