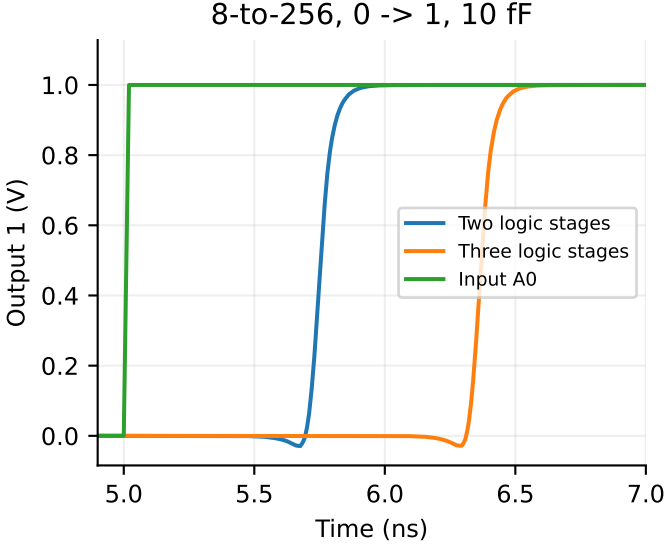
8-to-256, 0 -> 1, 10 fF
Output 1 (V)
1.0
0.8
0.6
0.4
0.2
0.0
5.0
5.5
6.0
6.5
7.0
Time (ns)
Two logic stages
Three logic stages
Input A0

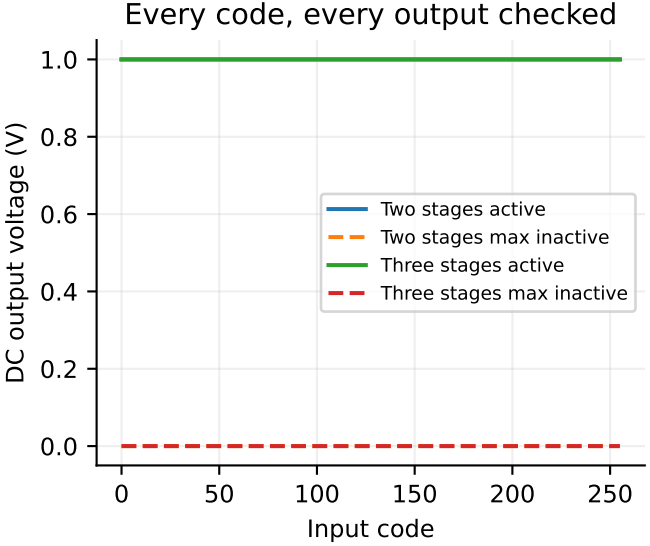
Every code, every output checked
DC output voltage (V)
1.0
0.8
0.6
0.4
0.2
0.0
0
50
100
150
200
250
Input code
Two stages active
Two stages max inactive
Three stages active
Three stages max inactive