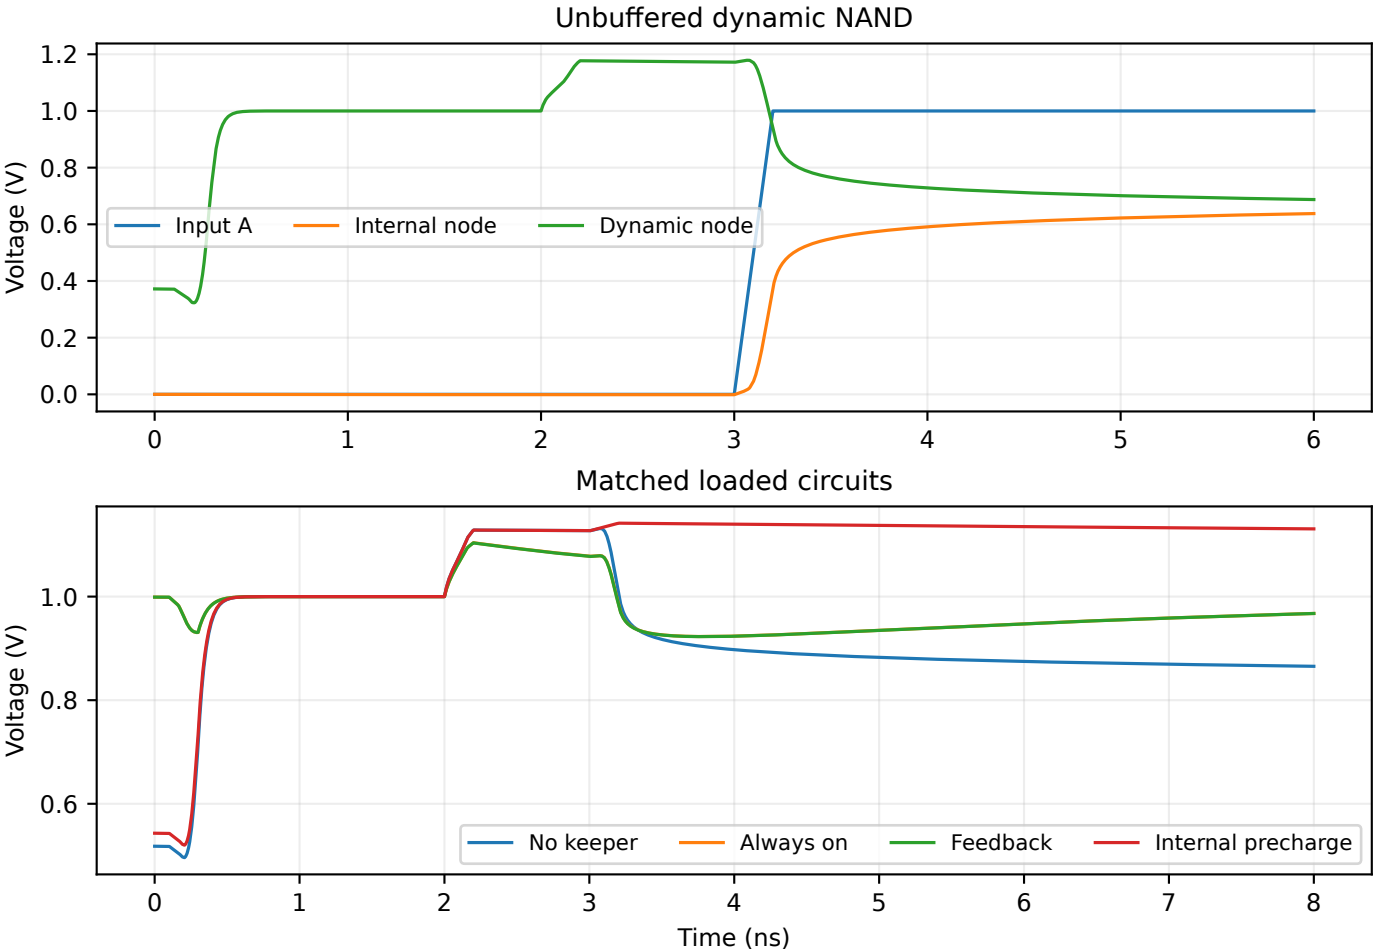
Unbuffered dynamic NAND
Voltage (V)
1.2
1.0
0.8
0.6
0.4
0.2
0.0
0
1
2
3
4
5
6
Input A
Internal node
Dynamic node
Matched loaded circuits
Voltage (V)
1.0
0.8
0.6
0
1
2
3
4
5
6
7
8
Time (ns)
No keeper
Always on
Feedback
Internal precharge