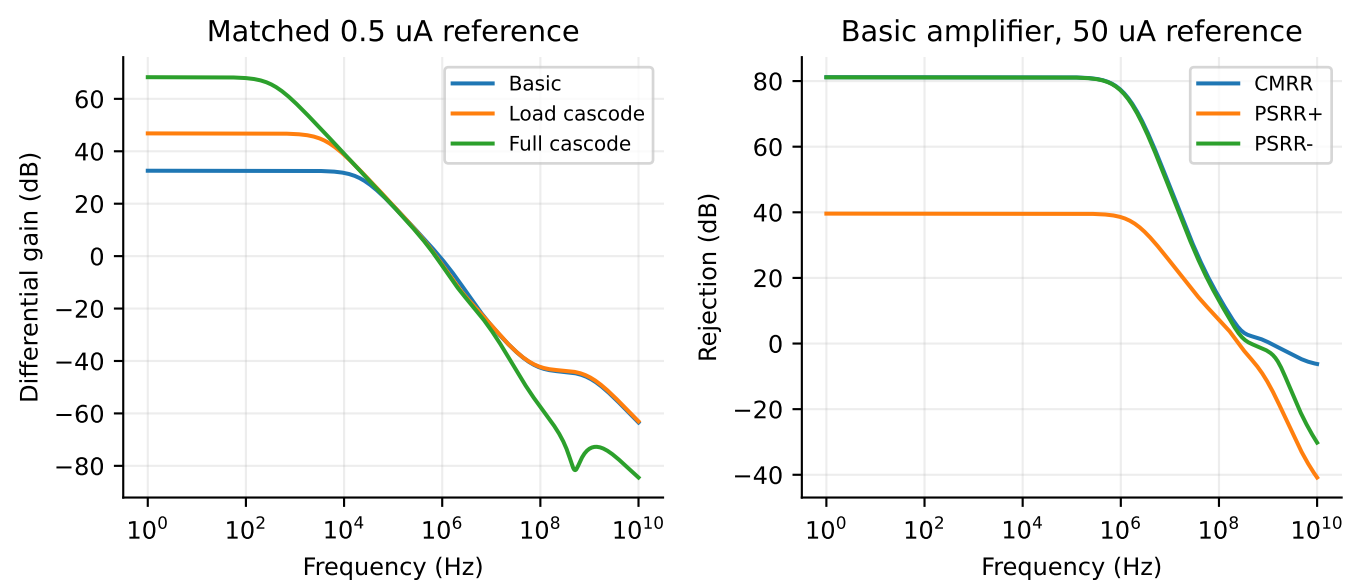
Matched 0.5 uA reference
Differential gain (dB)
Frequency (Hz)
Basic
Load cascode
Full cascode
Basic amplifier, 50 uA reference
Rejection (dB)
Frequency (Hz)
CMRR
PSRR+
PSRR-