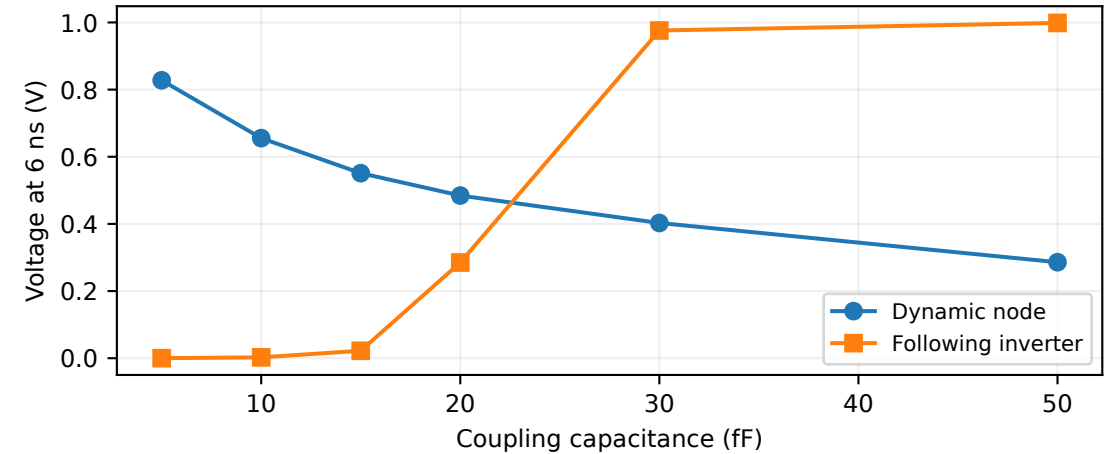
Voltage at 6 ns (V)
1.0
0.8
0.6
0.4
0.2
0.0
10
20
30
40
50
Coupling capacitance (fF)
Dynamic node
Following inverter

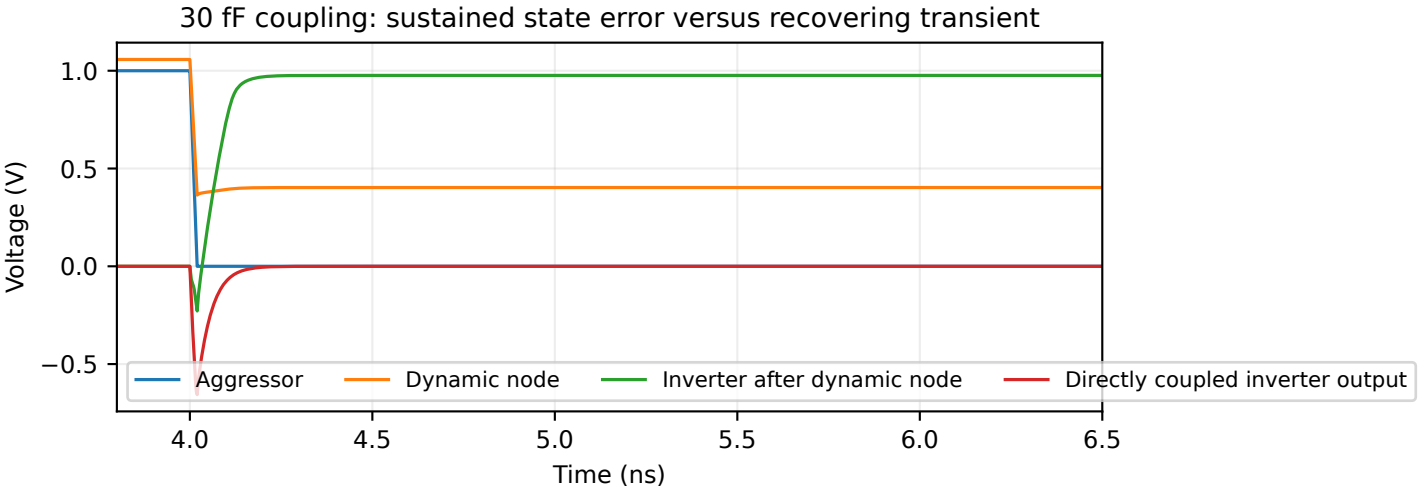
30 fF coupling: sustained state error versus recovering transient
Voltage (V)
1.0
0.5
0.0
−0.5
4.0
4.5
5.0
5.5
6.0
6.5
Time (ns)
Aggressor
Dynamic node
Inverter after dynamic node
Directly coupled inverter output