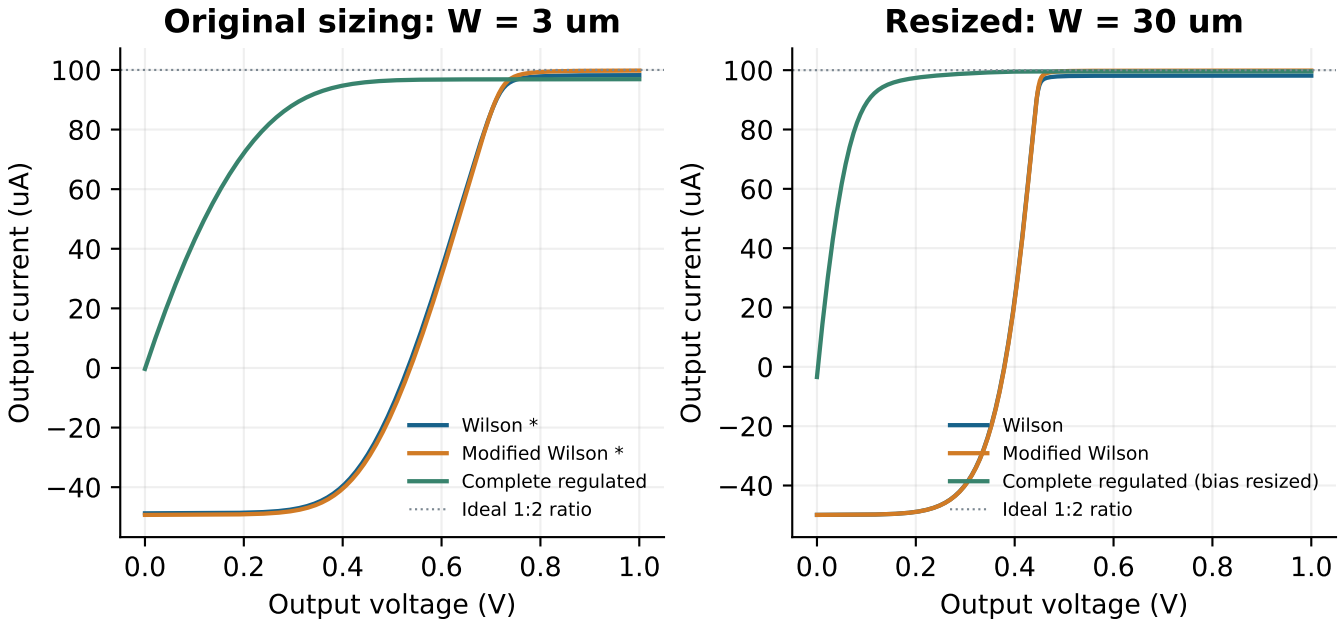

Iref = 50 uA, L = 1.4 um, VDD = 1 V. * Bias exceeds the supply rail.
Complete regulated (right): gain NMOS W=120 um; bias PMOS W=300 um.