$$C_u = 5\,\text{fF}, \qquad C_{\text{side}} = 256C_u = 1.28\,\text{pF}$$

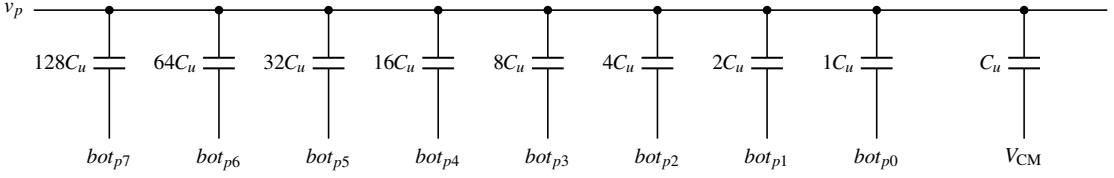

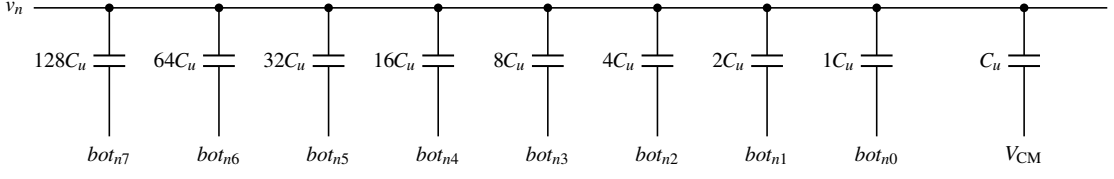

Each bot_{pi} and bot_{ni} connects to its three-way TG selector.
Sampling: two parallel NMOS and two parallel PMOS per input side.