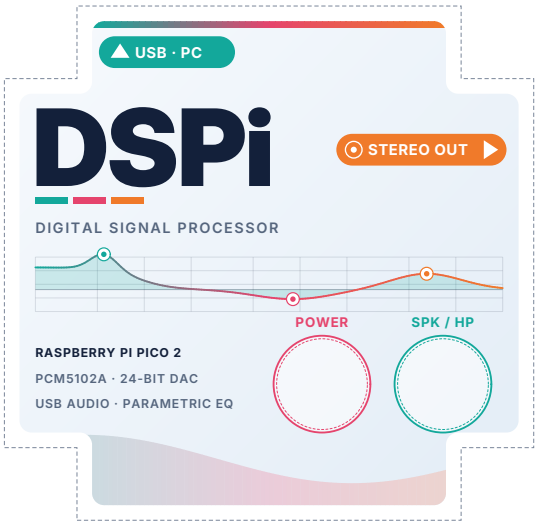
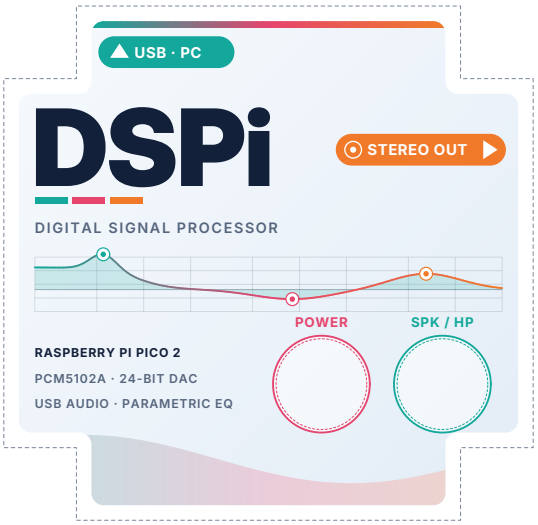
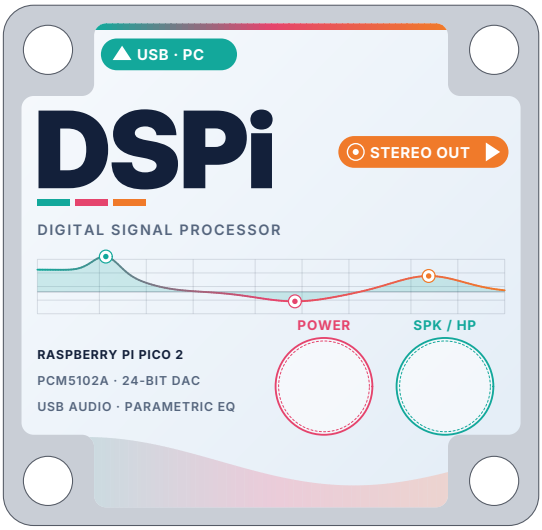
# DSPi – full-lid sticker (light version, for laminating)


Print at ACTUAL SIZE (100 %). The scale bar below must measure exactly 50 mm.
After laminating, cut along the grey dashed line – 2 mm of sealed film remains between the print and the cut.
The 10 × 10 mm corner notches leave the lid screws free. The POWER / SPK / HP rings sit over the button recesses – after drilling them, cut the sticker open with a scalpel (or a Ø 12 mm hole punch).




**Preview on the lid (1:1, top view, front edge at the bottom; USB at the back, jack on the right)**



50 mm scale bar