



Loading is dependant primarily upon the mullion strength, each supplier has its own strength characteristics - testing has been performed on a mid range system. It is the responsibility of the user to ensure the mullion has the sufficient strength necessary for the loading.

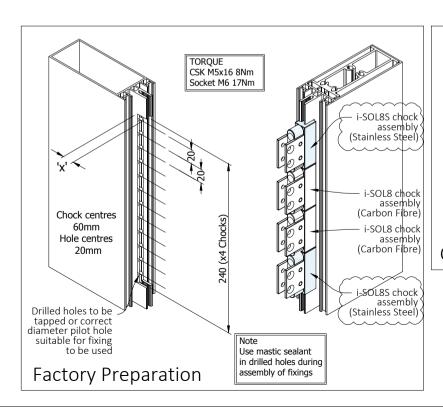

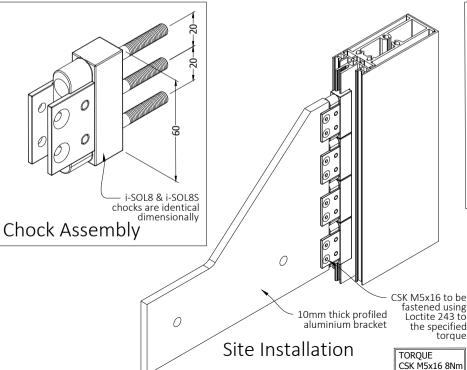

Specification

i-SOL8S Thermally efficient curtain wall bracket manufactured from carbon fibre and 304 stainless steel support chocks.

To guarantee zero interstitial condensation risk.

To attain a minimum ultimate loading of 4.5kNm combined with a Chi heat loss value of no more than 0.24 W/K.

