EX.NO: 10
21-9-26

10. a) DESIGN AND CONFIGURE A SIMPLE INTERNETWORK USING A ROUTER

Aim:


To configure and simulate point to point communicat b/w two PCs using a cisco router in cisco packet tracer

Network topology:

Device	Interface	IP Address	Subnet Mask
PC0	FastEthernet0	192.168.1.2	192.168.1.1
PC1	FastEthernet0	192.168.2.2	192.168.2.1
Router0	~~Fast~~ Gigabit Ethernet 0/0	192.168.1.1	N/A

Procedure:

* open cisco packet tracer and place two PCs and one cisco router in the workspace.
* connect all the connections.
* configure static IP, subnet mask and default gateway on PC0, PC1.
* access the router CLI mode.
* Assign IP addresses to both ethernet devices.
* Check link status. interfaces should turn green.
* open command prompt on PC0 and ping PC1's IP address to verify end-to-end connectivity.

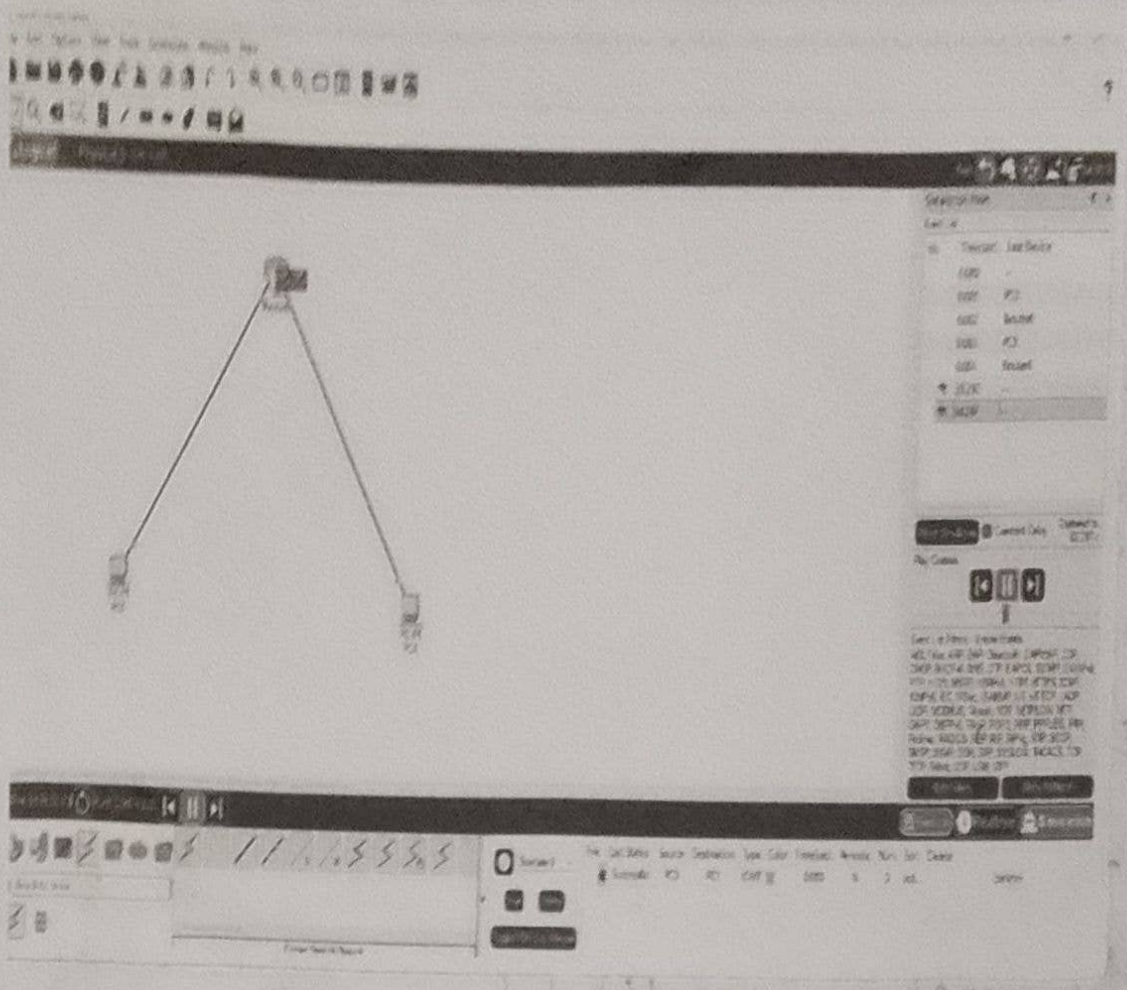

Result:

The configuration and simulation of two PCs communicating across different subnets sucessfully implemented!

10.b) DESIGN AND CONFIGURE AN INTERNETWORK USING WIRELESS ROUTER DHCP SERVER AND INTERNET CLOUD.

Aim:

Design and configure an internetwork using wireless router, DHCP server and internet cloud.

Procedure:

i) open cisco packet tracer

ii) Add network devices to the workspace and change the display names of the network devices.

iii) configure the network devices using DHCP services.

iv) configure laptop using wifi connection

v) Click on the Desktop tab at the top of the laptop configuration window and select the PC wireless tion


vi) configure the all PCs to set IP address, subnet mast, default gateway.

vii) click on the command prompt. Verify that the PC has received an IPV4 address by issuing ipconfig/all command.

viii) configure the internet cloud install network modules if necessary.

ix) click on cisco.com server the packet tracer logical workspace and select services → DHCP → services Put all details

x) verify using ping cisco.com command.

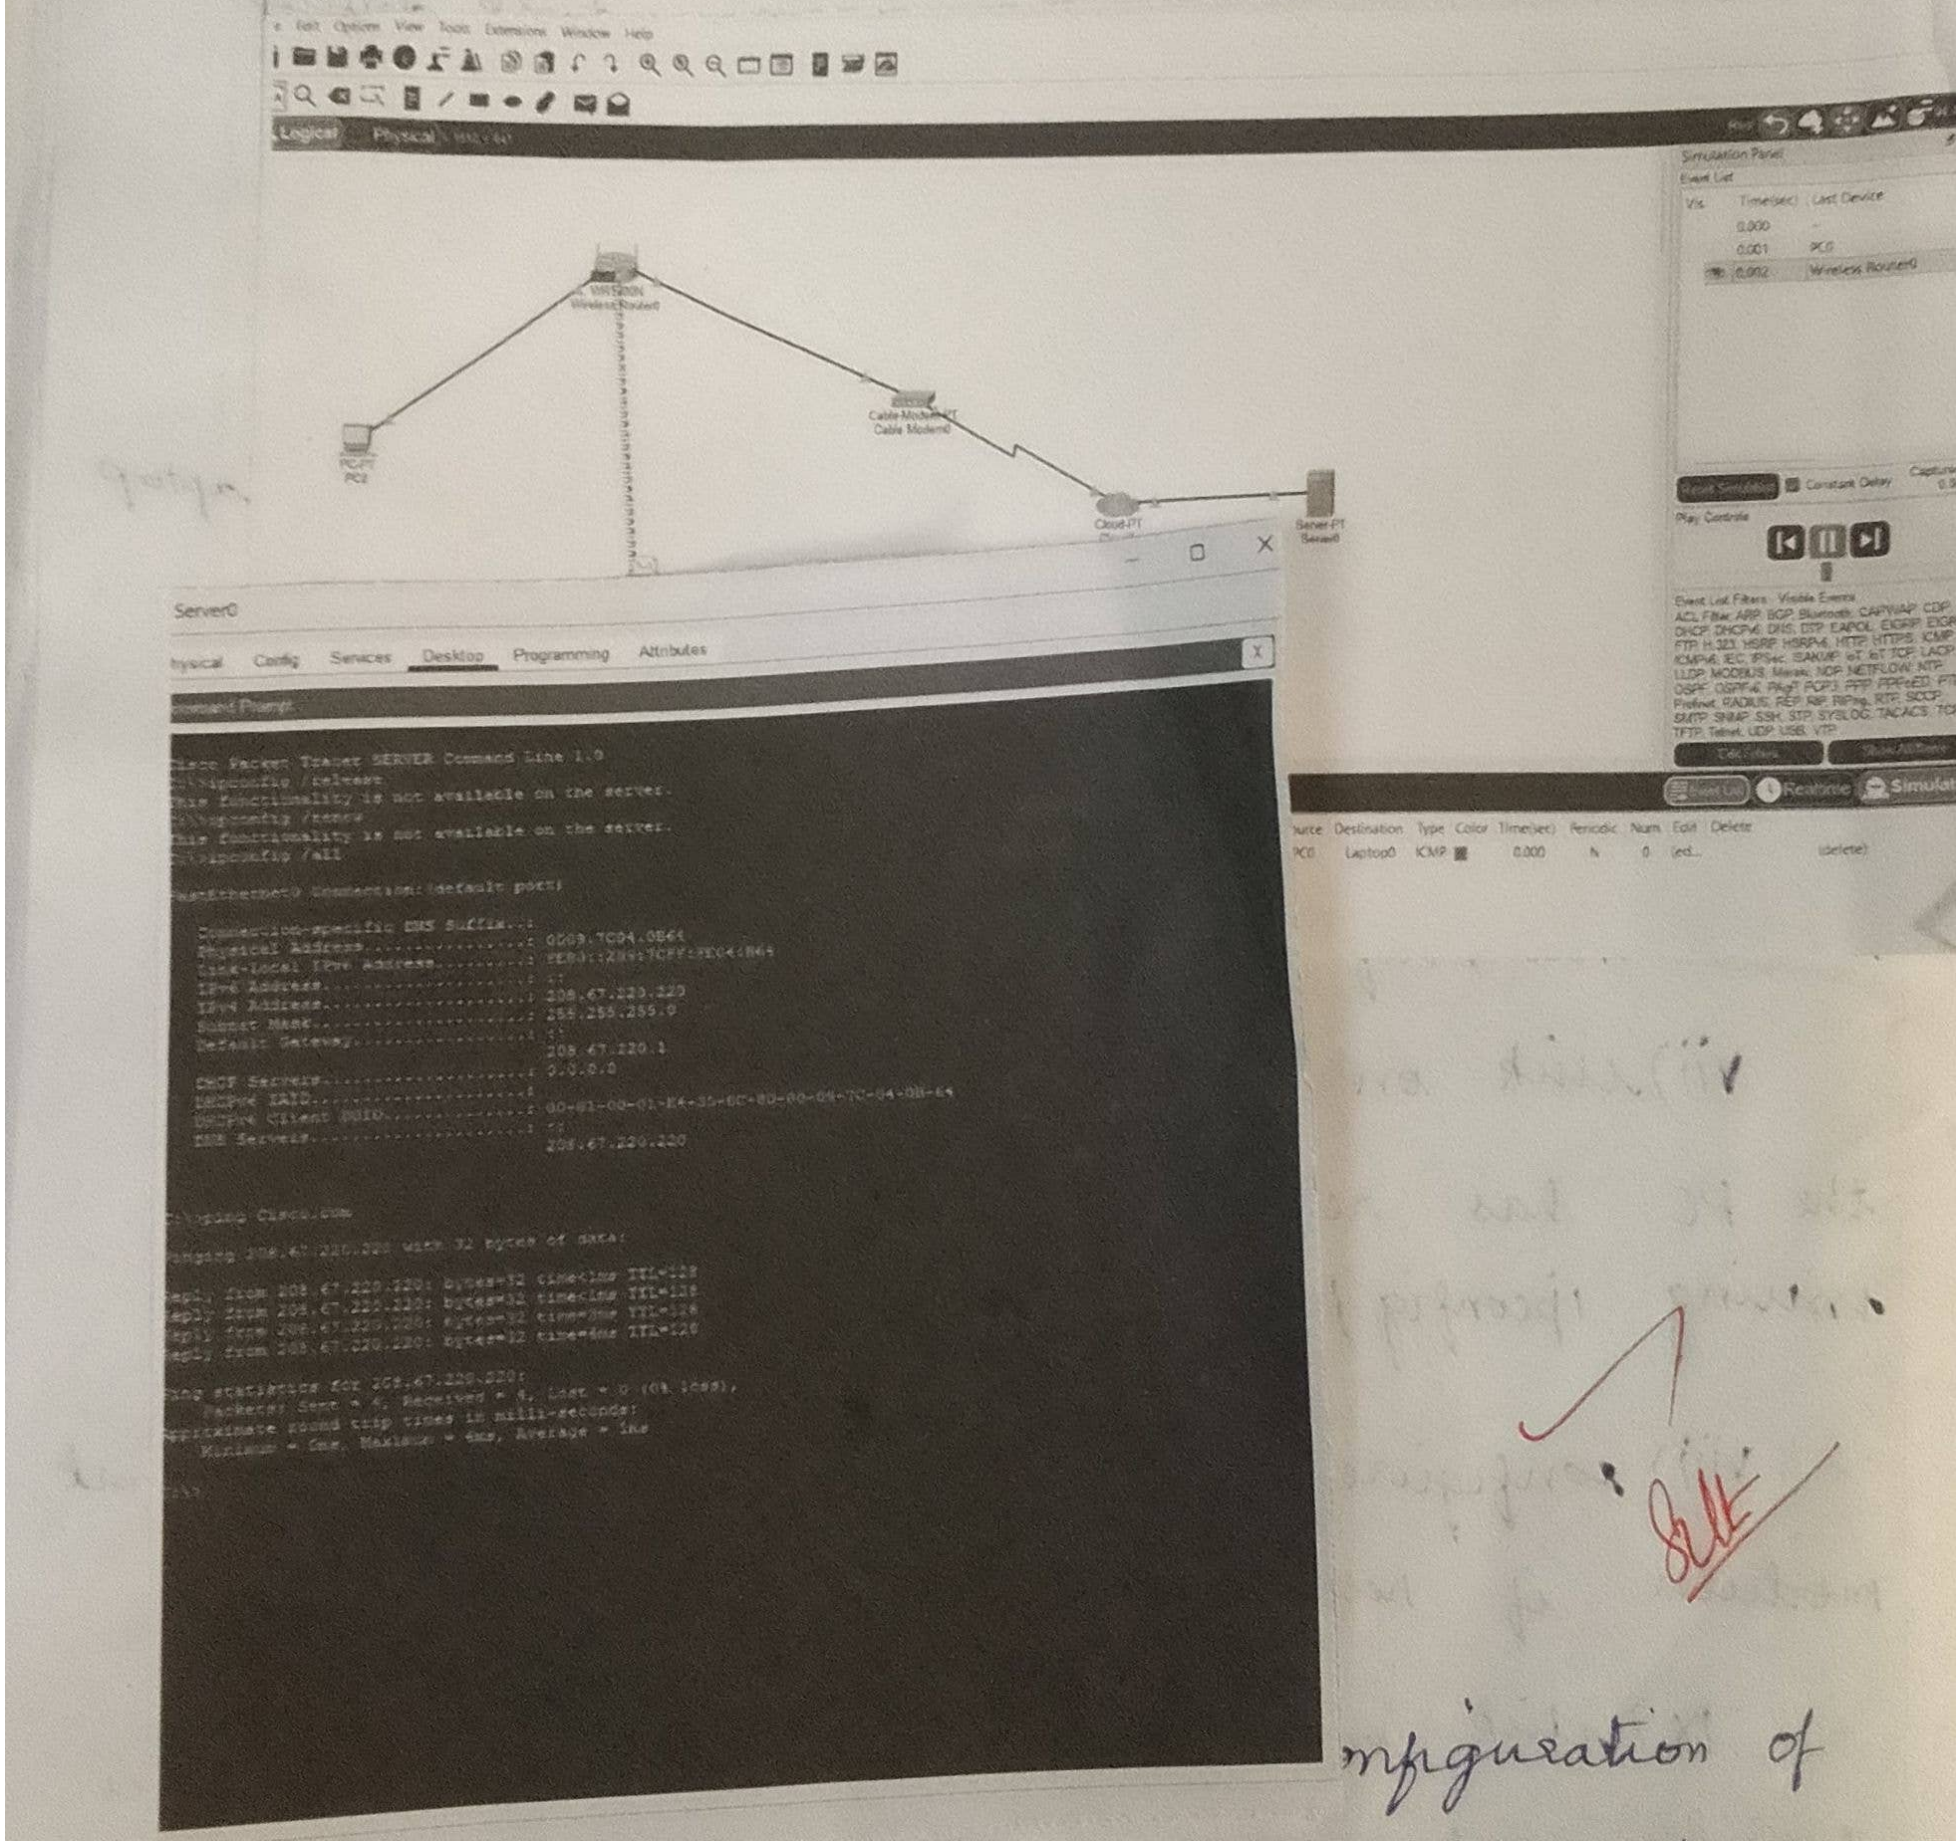

configuration of a wireless network was successfully executed and verified.