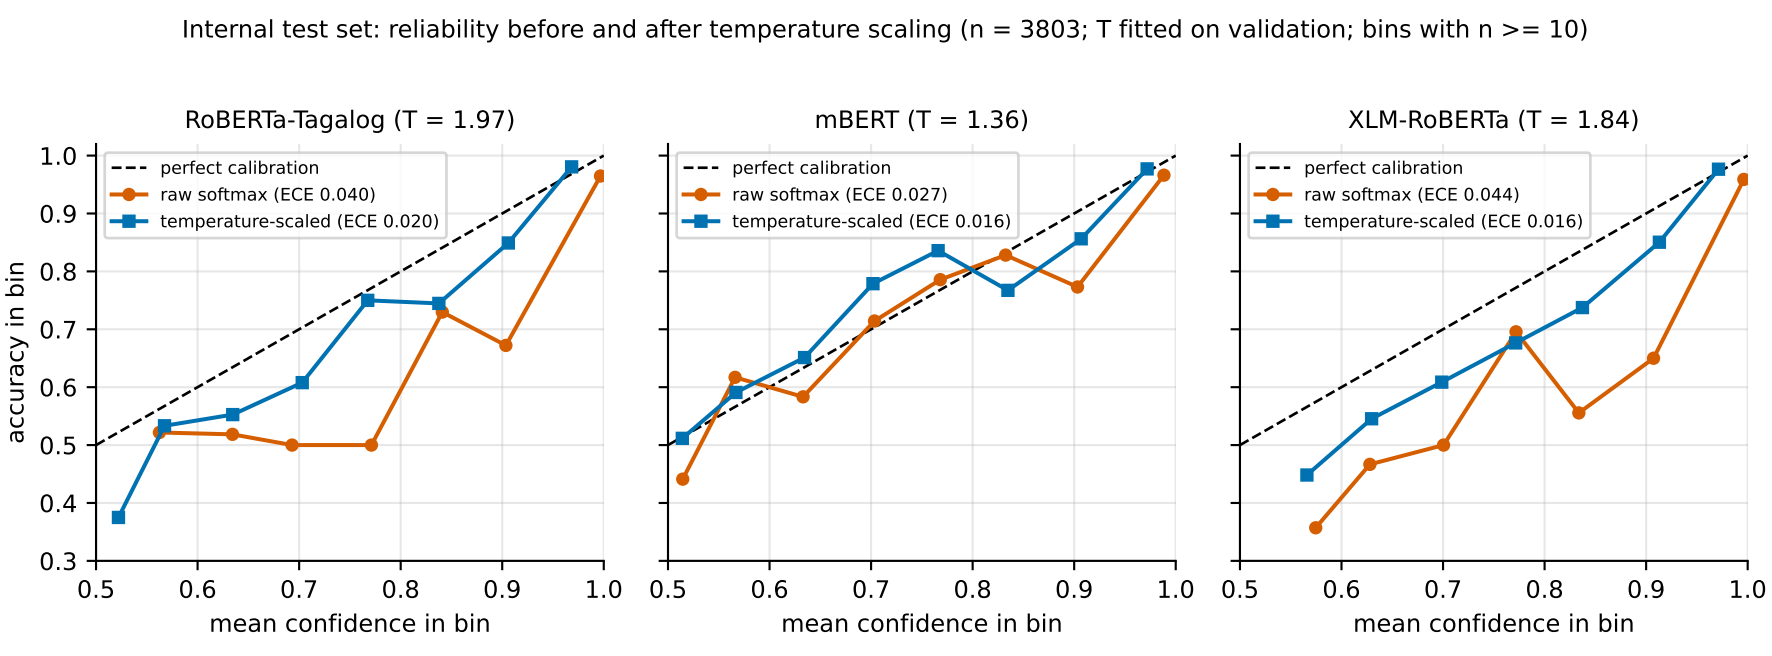
Internal test set: reliability before and after temperature scaling (n = 3803; T fitted on validation; bins with n >= 10)
RoBERTa-Tagalog (T = 1.97)
mBERT (T = 1.36)
XLM-RoBERTa (T = 1.84)
perfect calibration
raw softmax (ECE 0.040)
temperature-scaled (ECE 0.020)
raw softmax (ECE 0.027)
temperature-scaled (ECE 0.016)
raw softmax (ECE 0.044)
temperature-scaled (ECE 0.016)
accuracy in bin
mean confidence in bin
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.5
0.6
0.7
0.8
0.9
1.0