

2 - 8 - 9


- - H normal
1 NA 1 SPI boot (default) Flash boot
1 1 0 Download

C3:

GPIO0/D0 - /BAT READ
GPIO1/A1 - BAT Vin
GPIO2/D2 - /VOPEN
GPIO21/D3 - /VCLOSE
GPIO22/D4 - I2C SDA
GPIO23/D5 - I2C SCL
GPIO20/D9 - ILED
GPIO18/D10 - VALVE
GPIO17/D7 - RX / 1-wire
GPIO16/D6 - TX / 1-wire

GPIO3 - /Antenna chip
GPIO14 - H=ext antenna
GPIO15 - Module yellow LED

Avoid 4,5,8,9,15

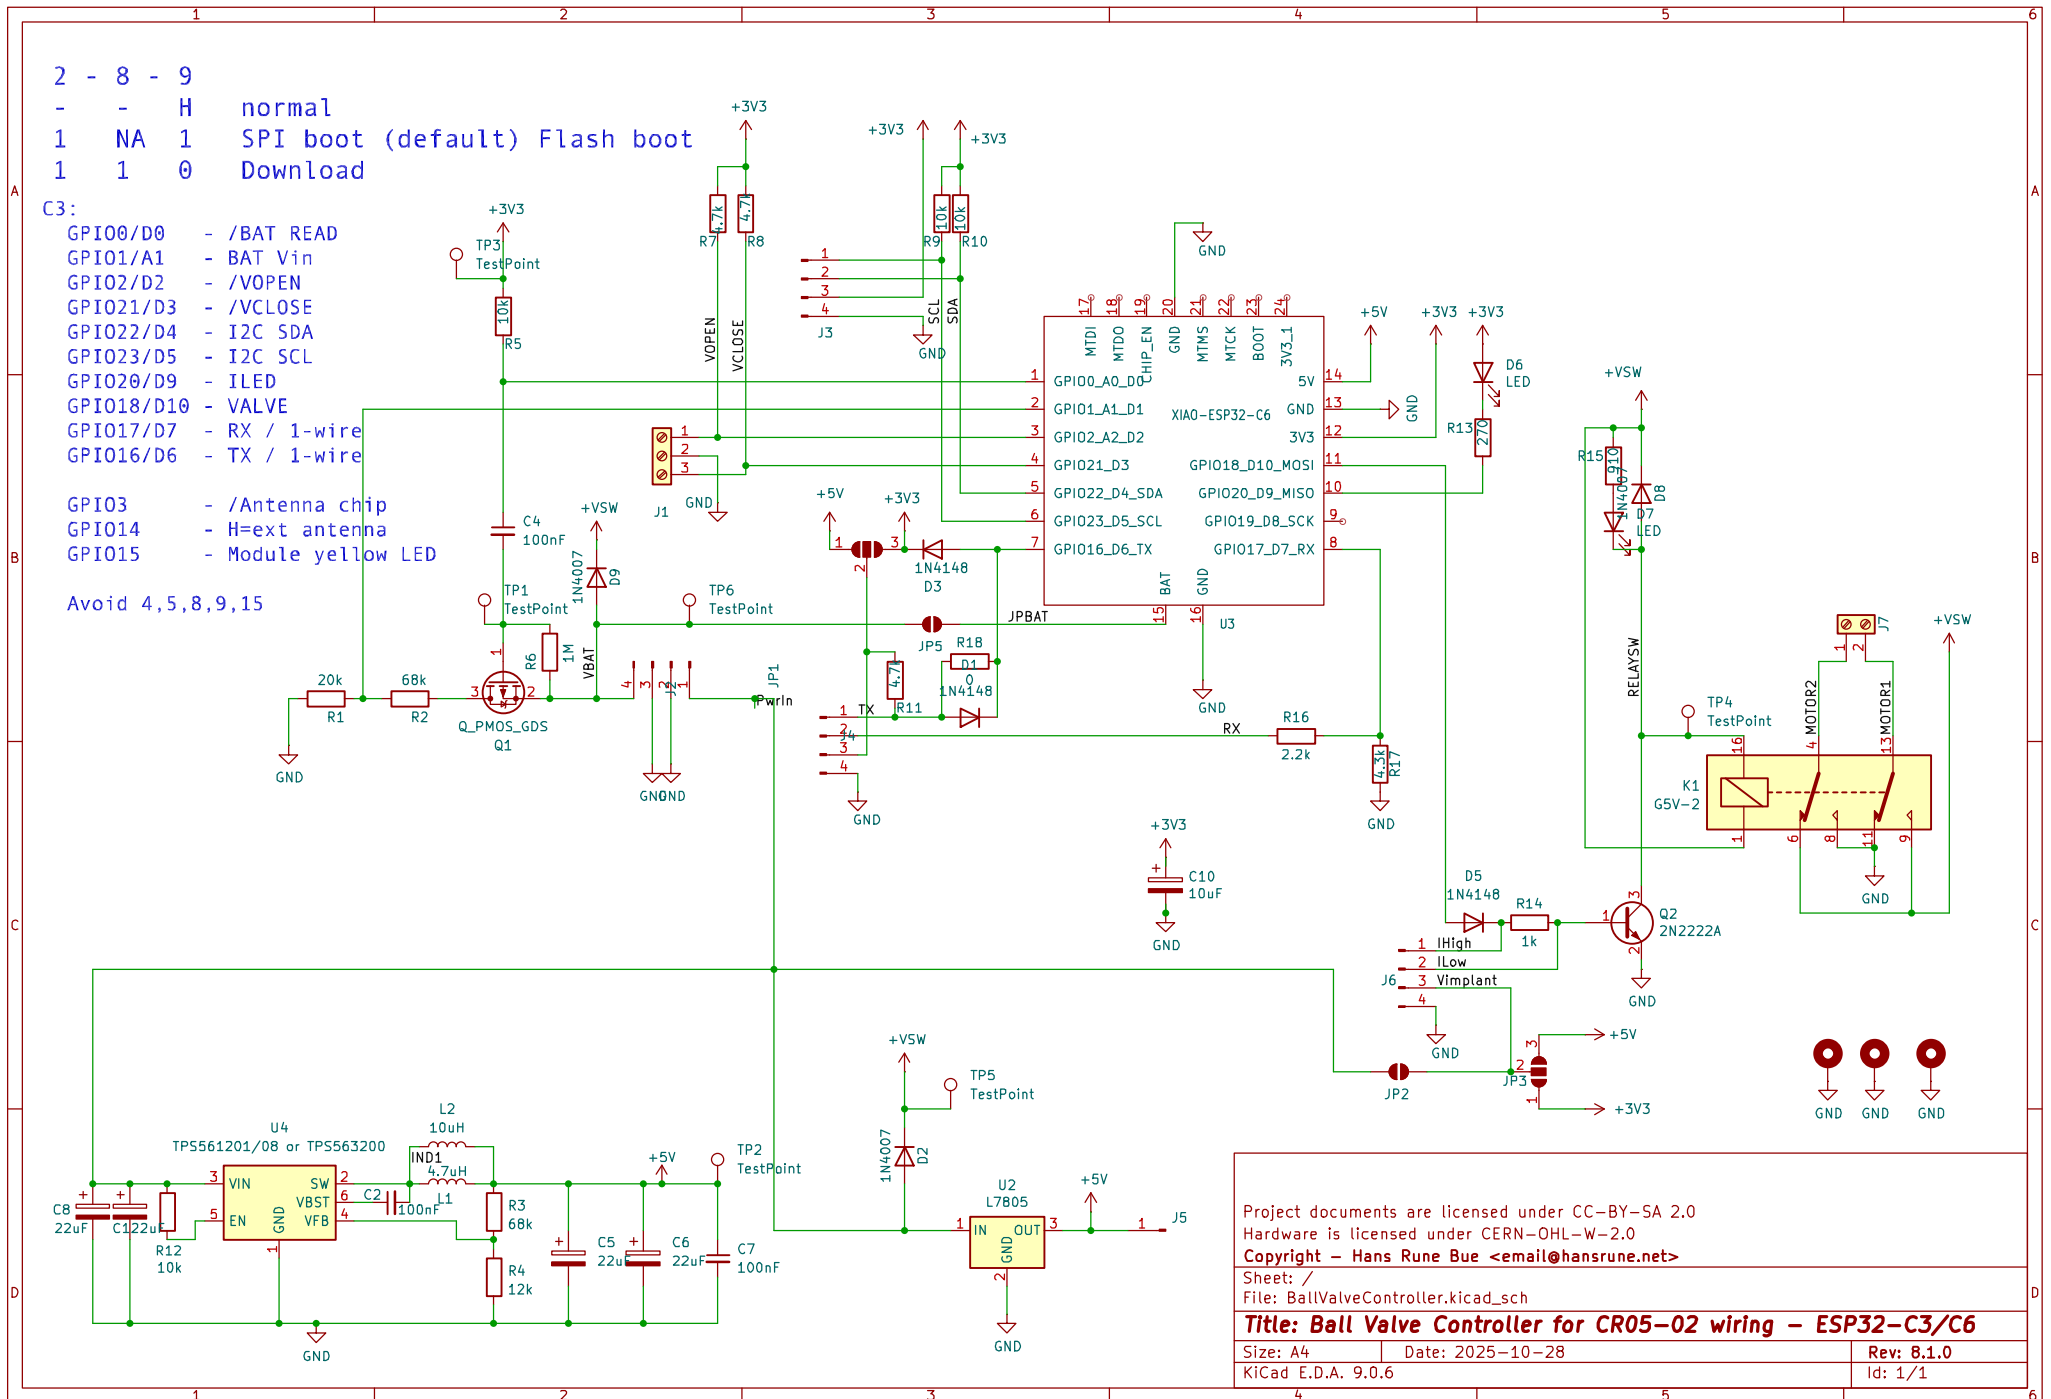

Project documents are licensed under CC-BY-SA 2.0

Hardware is licensed under CERN-OHL-W-2.0

Copyright - Hans Rune Bue <email@hansrune.net>

Sheet: /

File: BallValveController.kicad_sch

Title: Ball Valve Controller for CR05-02 wiring - ESP32-C3/C6

Size: A4 Date: 2025-10-28

Rev: 8.1.0

KiCad E.D.A. 9.0.6

Id: 1/1