

NOTES:
1. Part number corresponds to McMaster-Carr Catalog Number #2342K168 for reference as per the McMaster-Carr catalog.

2. Grease all mounting with LB 8700 or equivalent when assembly. Ensure proper lubrication to prevent corrosion and wear.

3. Equivalent vendors are accepted. Follow the bearing trade number R12 with the following specifications:

- ID: 0.75 in
- OD (Outer Diameter): 1.625 in
- Width: 5/16 in
- For Permanently Lubricated Ball Bearings.

4. Tolerance specifications for alternative bearings:


- ID (Inner Diameter) Tolerance: -0.0004" to 0"
- OD (Outer Diameter) Tolerance: -0.0005" to 0"
- Width Tolerance: -0.005" to 0"

5. Inspection Requirements:
All bearings to be inspected for dimensional accuracy and smooth rotation before assembly.



6. Corrosion Resistance:
Bearing must be stainless steel or equivalent corrosion-resistant material suitable for potential exposure to water containing chlorine and fluoride.

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
00	Initial Bearing Selection	12/7/2024	JZ

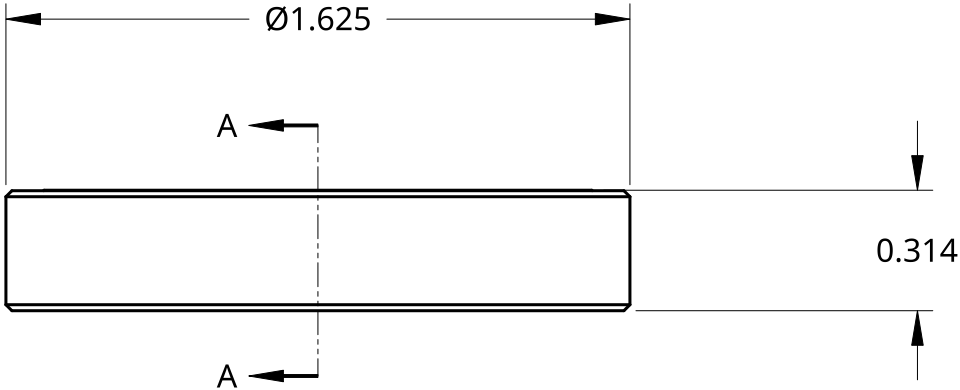

SECTION A - A

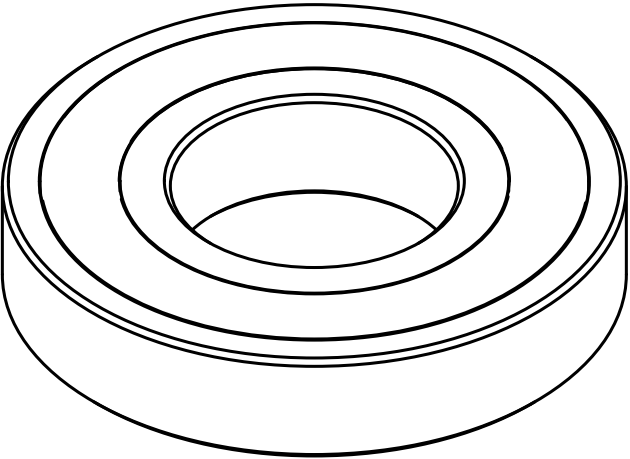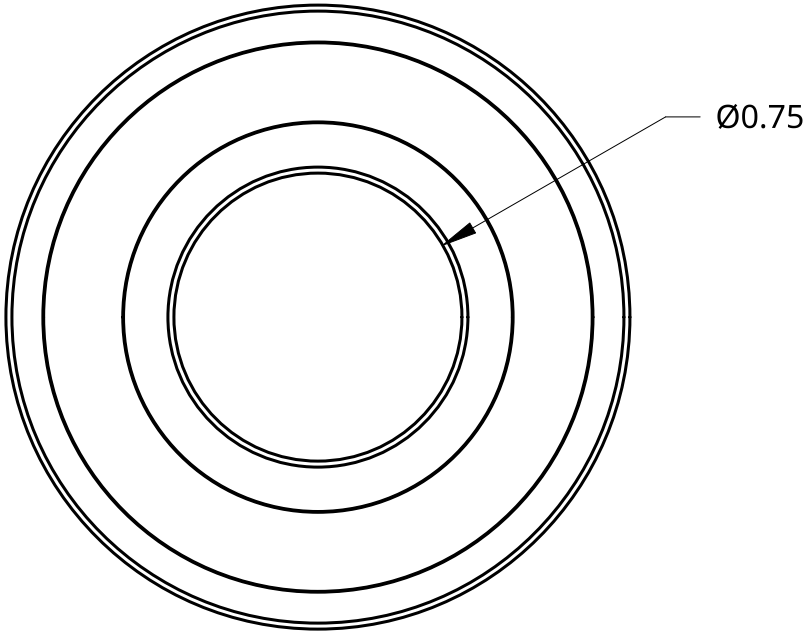

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS
.XX = ±.01
.XXX = ±.002
.XXXX = ±.0005

ANGULAR = ± 0.1°
FRACTIONAL = ±0.1


SURFACE FINISH



DO NOT SCALE DRAWING

BREAK ALL SHARP EDGES AND
REMOVE BURRS

THIRD ANGLE PROJECTION



NAME

DATE

DRAWN

Water Pump Team

12/05/2024

CHECKED

APPROVED

JZ

12/05/2024

TITLE

PUMP SHAFT BEARING

SIZE

DWG NO.

OTS-000002

REV.

00

SCALE

2:1

WEIGHT

SHEET

1 of 1