


PIVOTING BIKE PARKING STAND

Model No.: HS-T013H


Apply for: 16"-29" bikes

L-shaped parking rack, anti slip rubber feet


Max tyre width: 8.5cm (3.35")

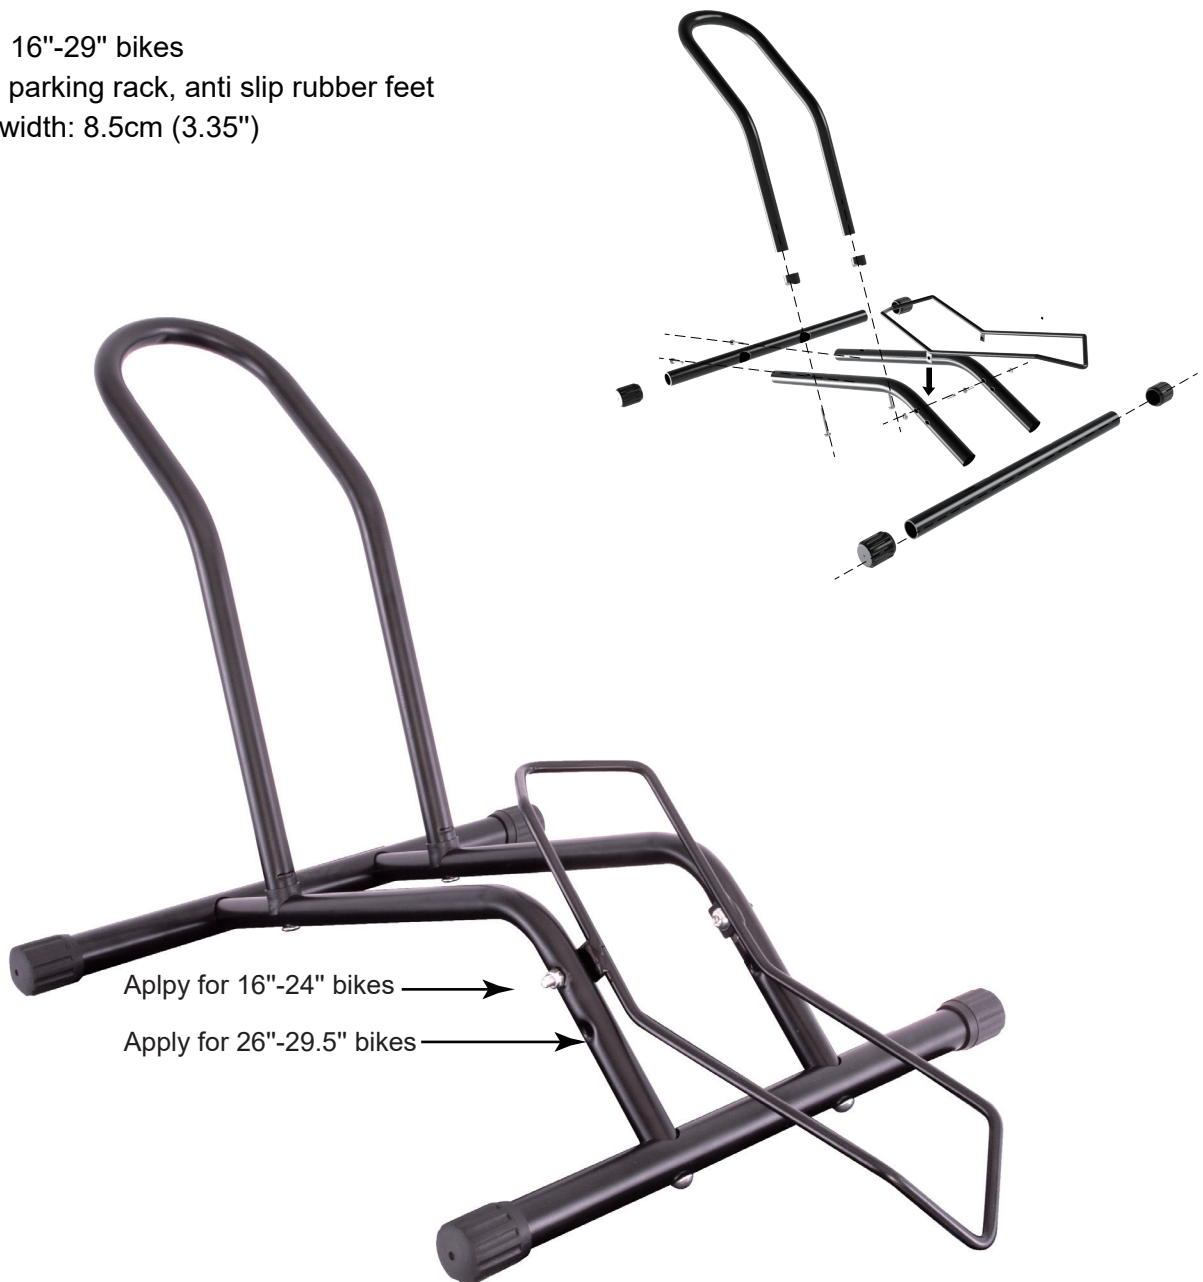


PRODUCT PARTS

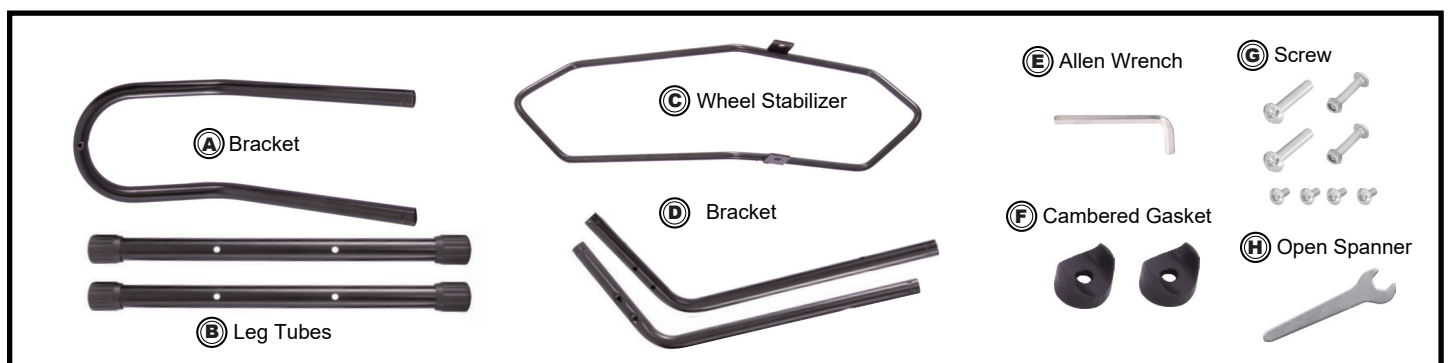

Product assembly

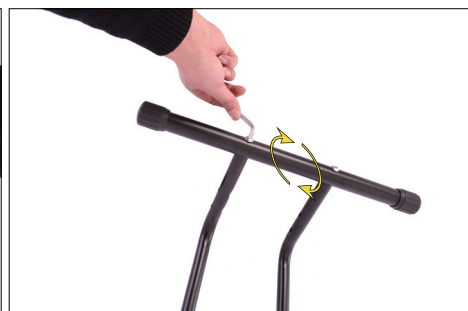


1-3. Insert bracket D into the leg tube mounting holes, using Allen Wrench and shorter screws to fasten the bracket.

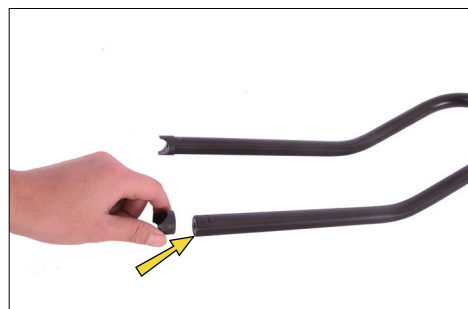

4. Insert the other end of the two Bottom supports into the Transverse tube card slot

5. Fix it with screws separately

6. Insert cambered gaskets to the bracket A according the direction shown on the image.

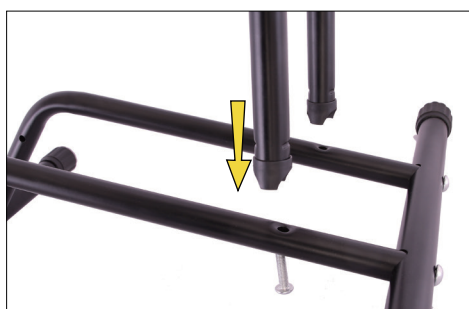

7. Align the cambered gasket to the mounting hole on bracket D according to the direction shown on image, meanwhile inserting screws into mounting holes from bottom side.

8. Fasten the bolts with Allen Wrench.

9. Mounting the wheel stabilizer as the shown image, insert the bolt into the mounting hole of wheel stabilizer and bracket D from the inner side, fasten the nut at outside, fasten bolts at inner side with Allen Wrench. Install wheel stabilizer first, tighten bolts later.

Parking method

Align the wheel with the Wheel Stabilizer and push the bicycle inward until the Wheel Stabilizer pops up to fix the wheel

