


Motivation / Introduction

- State-of-the-art assistive shoulder exoskeleton can provide support to shoulder lifting, but they can cause misalignment issues and significantly impede natural shoulder movement.
- State-of-the-art assistive shoulder exoskeleton cannot be both lightweight and provide torque assistance >11.5 Nm* due to limitations in their actuation
- To overcome these limitations, we developed the most lightweight, powered shoulder exoskeleton with cable-driven quasi-direct drive actuation that can assist shoulder flexion and abduction without joint misalignment issue and not compromising natural shoulder movement.

Bio-inspired Mechanism to Prevent Joint Misalignment

- Our design mimics scapulothoracic rhythm (upward rotation and protraction) so the device's instantaneous center of rotation follows the anatomical shoulder through elevation and reach, minimizing misalignment.


DOF 1 Shoulder Abduction DOF 2 Shoulder Flexion

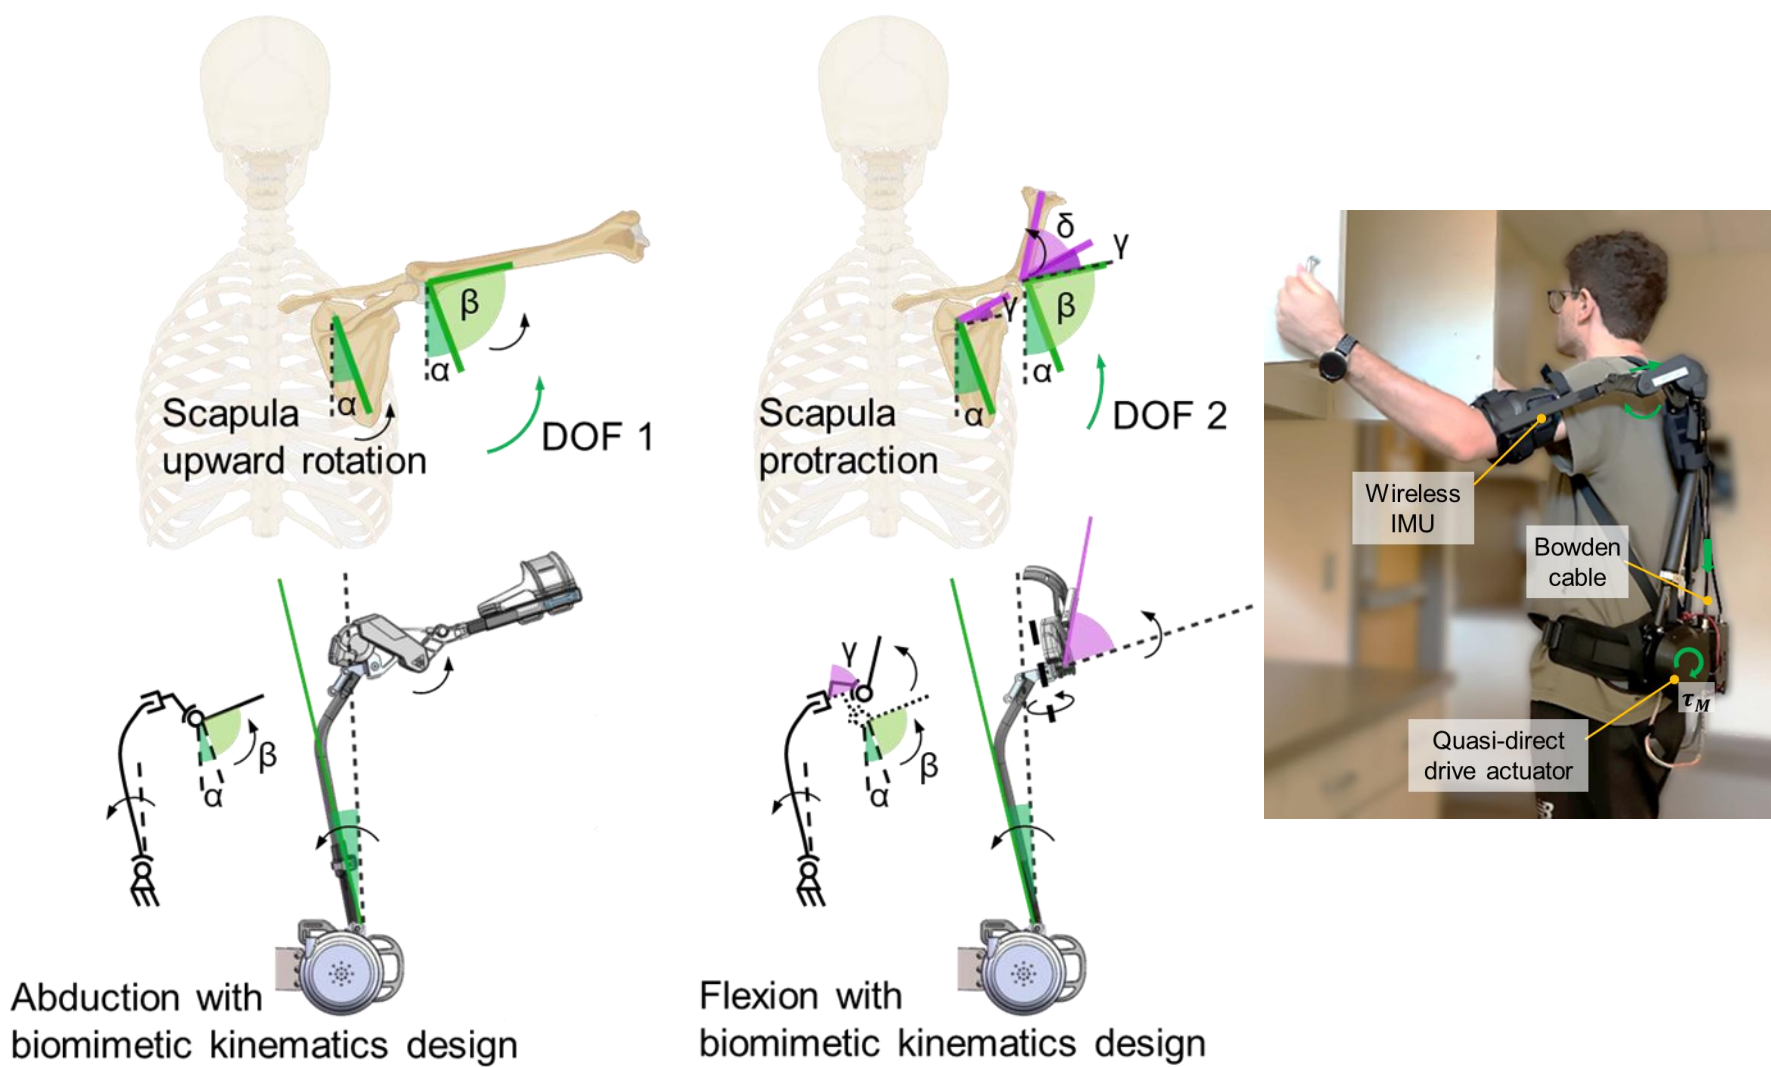

Variable Lever Arm Mechanism design


- Our design increased the cable moment arm with humeral elevation (≈ 71 mm at high angles), delivering higher shoulder torque where needed without raising motor current.
- Reduced the moving transmission by $\sim 68\%$ and shifts mass off the arm, reducing physical interference and improving portability and comfort.

(c) Assistive torque moment arm as a function of shoulder elevation angle (based on kinematics model)

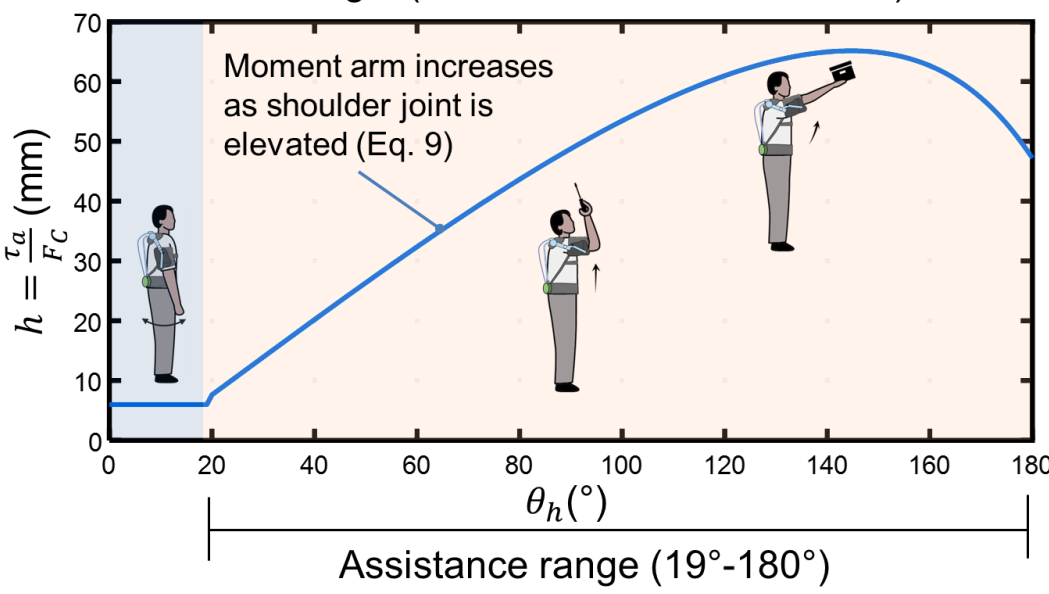

(d) Comparison with mechanism with fixed moment arm: smaller component size, higher mechanical transparency

State-of-the-art design: Roller with fixed moment arm

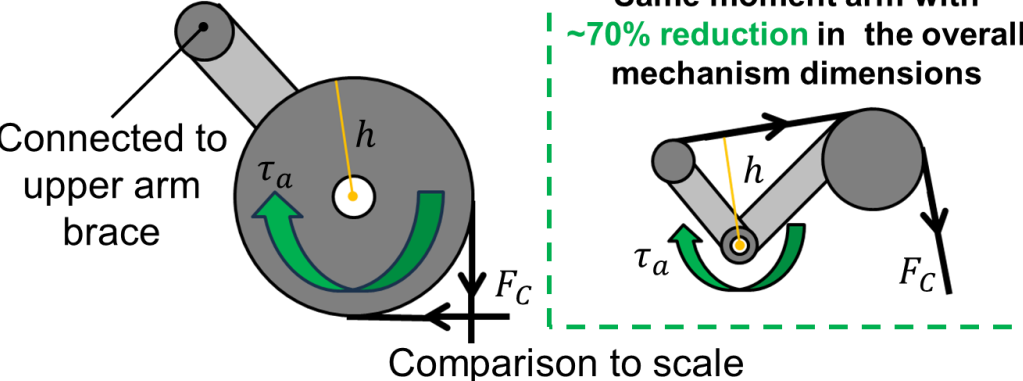

Acknowledgment

This work was supported in part by the National Science Foundation (NSF) Future of Work 2231419, NSF Cyber-Physical Systems 2344956, National Institutes of Health (NIH) 1R01EB035404.




Reference

- [1] J. Zhu, C. Jiao, I. Dominguez, S. Yu and H. Su, "Design and Backdrivability Modeling of a Portable High Torque Robotic Knee Prosthesis With Intrinsic Compliance for Agile Activities," in IEEE/ASME Transactions on Mechatronics, vol. 27, no. 4, pp. 1837-1845, Aug. 2022.
- [2] S. Yu, T.H. Huang, D. Wang, B. Lynn, D. Sayd, V. Silivanov, Y.S. Park, Y. Tian, H. Su. "Design and Control of a High-Torque and Highly-Backdrivable Hybrid Soft Exoskeleton for Knee Injury Prevention during Squatting". IEEE Robotics and Automation Letters, Jul 26;4(4):4579-86., 2019.
- [3] T. Huang, S. Zhang, S. Yu, M. MacLean, J. Zhu, A. Lallo, C. Jia, T. Bulea, M. Zheng and H. Su, "Modeling and Stiffness-Based Continuous Torque Control of Lightweight Quasi-Direct-Drive Knee Exoskeletons for Versatile Walking Assistance," in IEEE Transactions on Robotics (TRO), vol. 38, no. 3, pp. 1442-1459, Jun. 2022.


Portable and Expandable Electronics Architecture

- We proposed a powerful electronics architecture using a hierarchical structure with a high-level computer and a low-level microcontroller.
- Our customized high-torque density motor and compact customized electronics maximize the portability and can handle AI computation workloads with various interfaces for multi-sensor infusion.

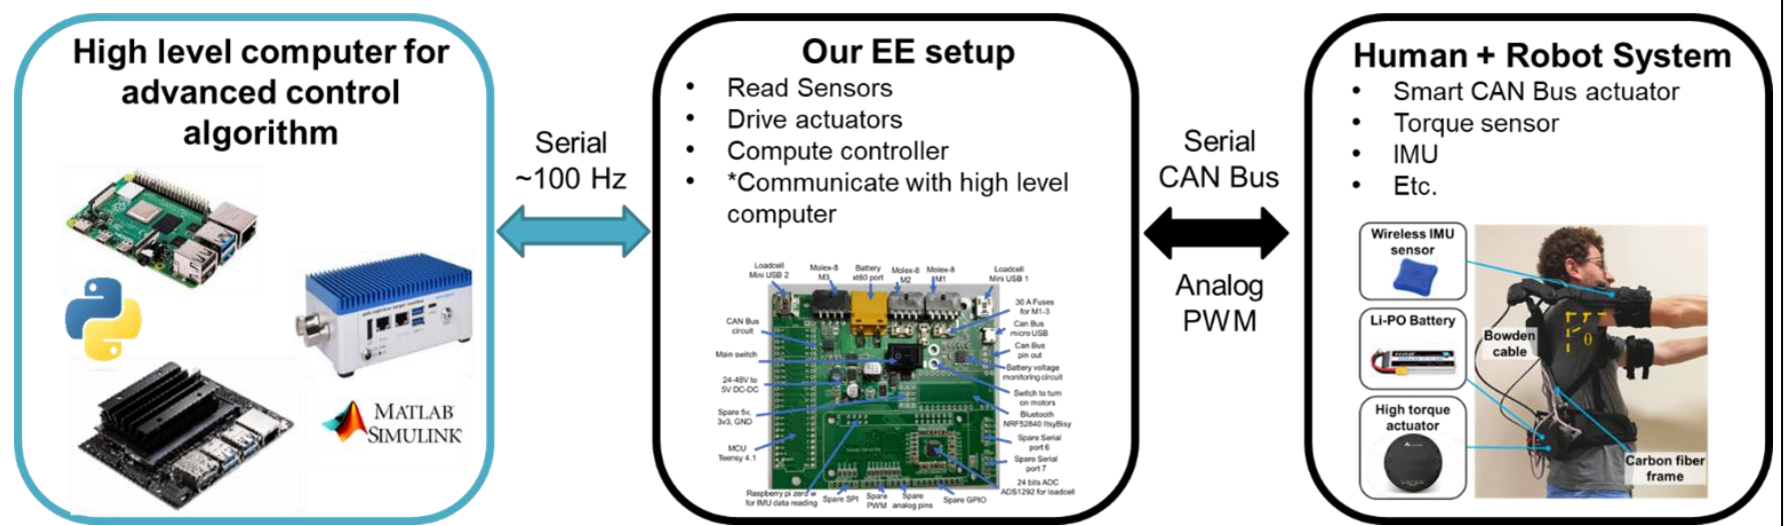


Experiment Results


Experiment Protocol

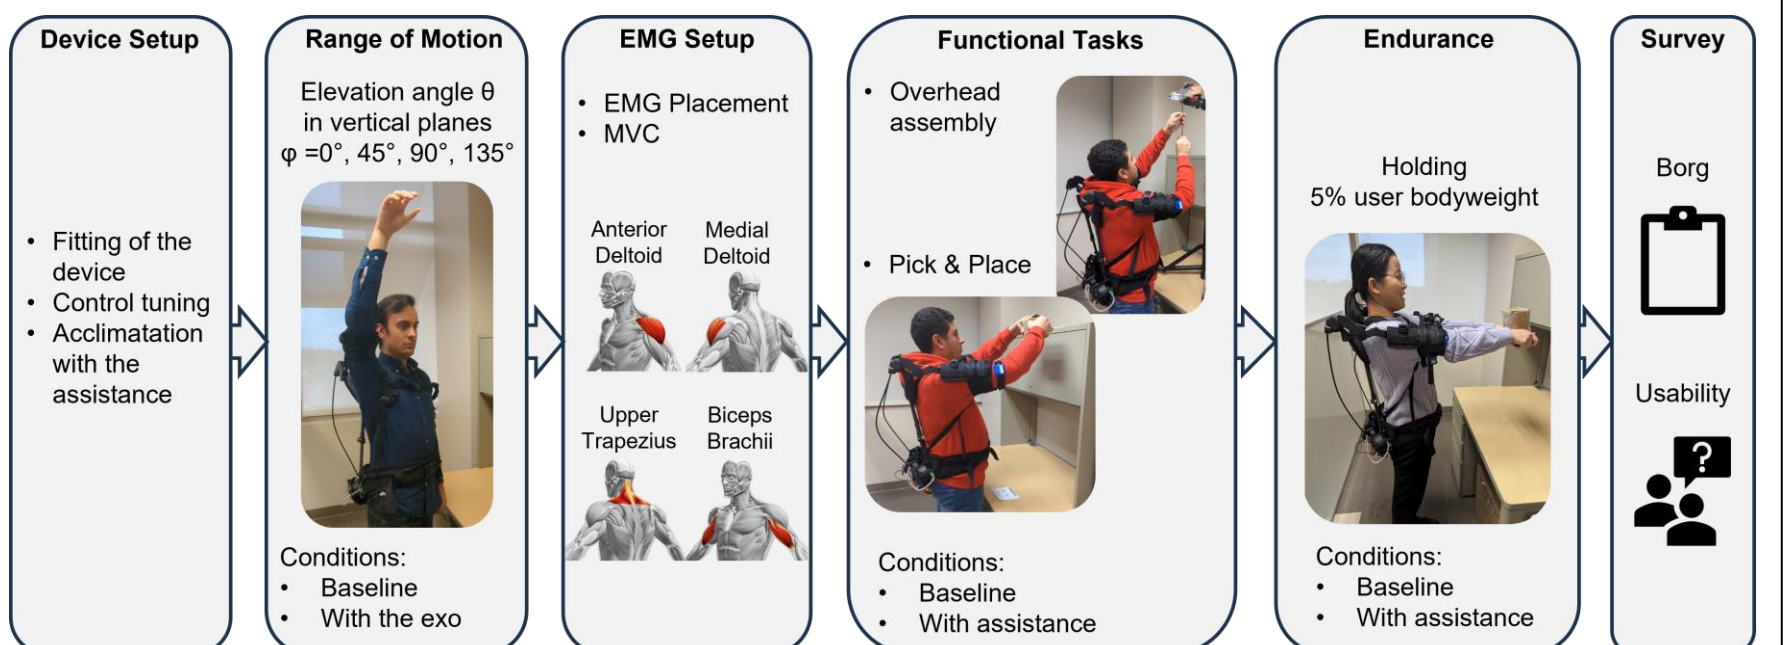

- Our robot can assist both shoulder flexion, and abduction, with minimized reduction in range of motion ($<8\%$) compared with no exoskeleton condition. Wearing the exoskeleton resulted in a slight reduction of the range of motion compared with the baseline condition (not wearing the device), but it did not compromise the possibility of performing most activities of daily living.

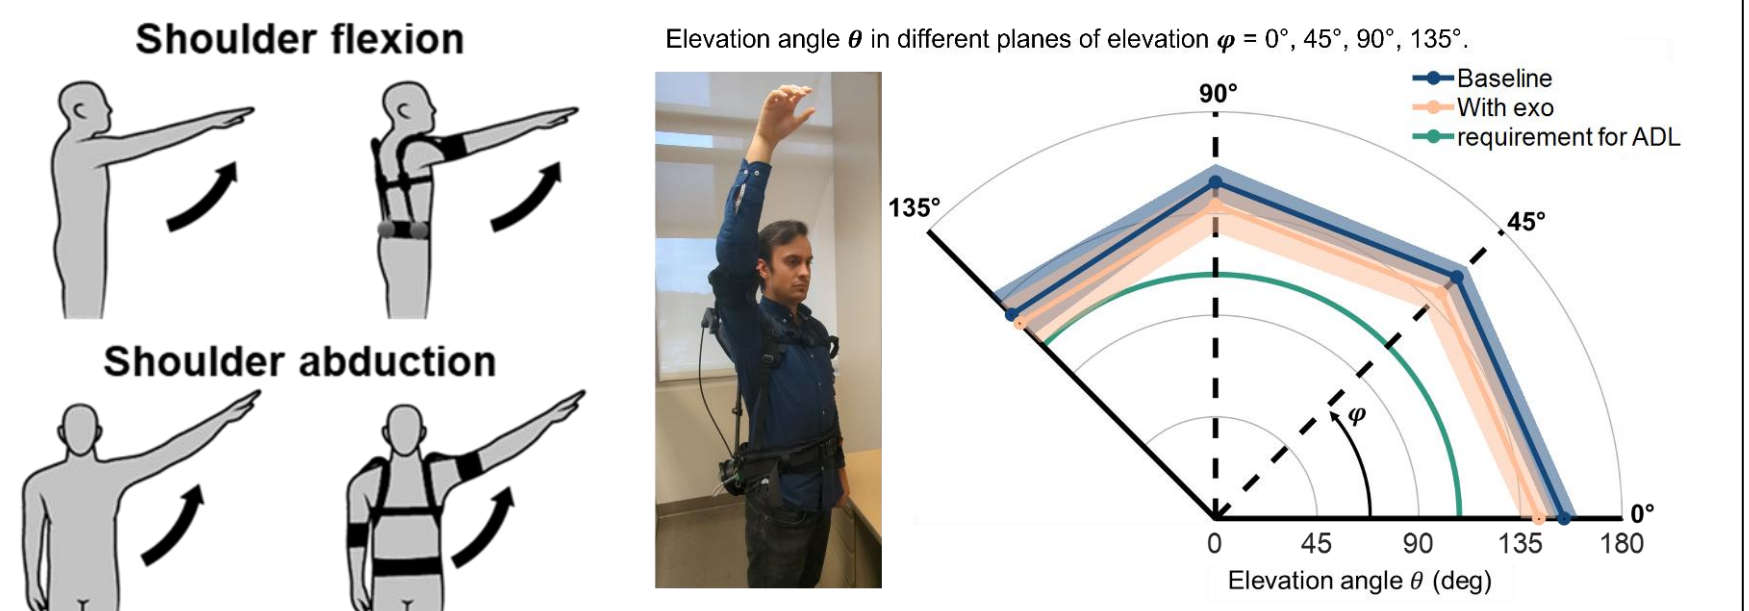


- The average endurance time increased from 73 s to 126 s (+73.2%) with assistance compared to not wearing the device. This result is supported by the fact that on average, the activity of recorded muscles significantly decrease

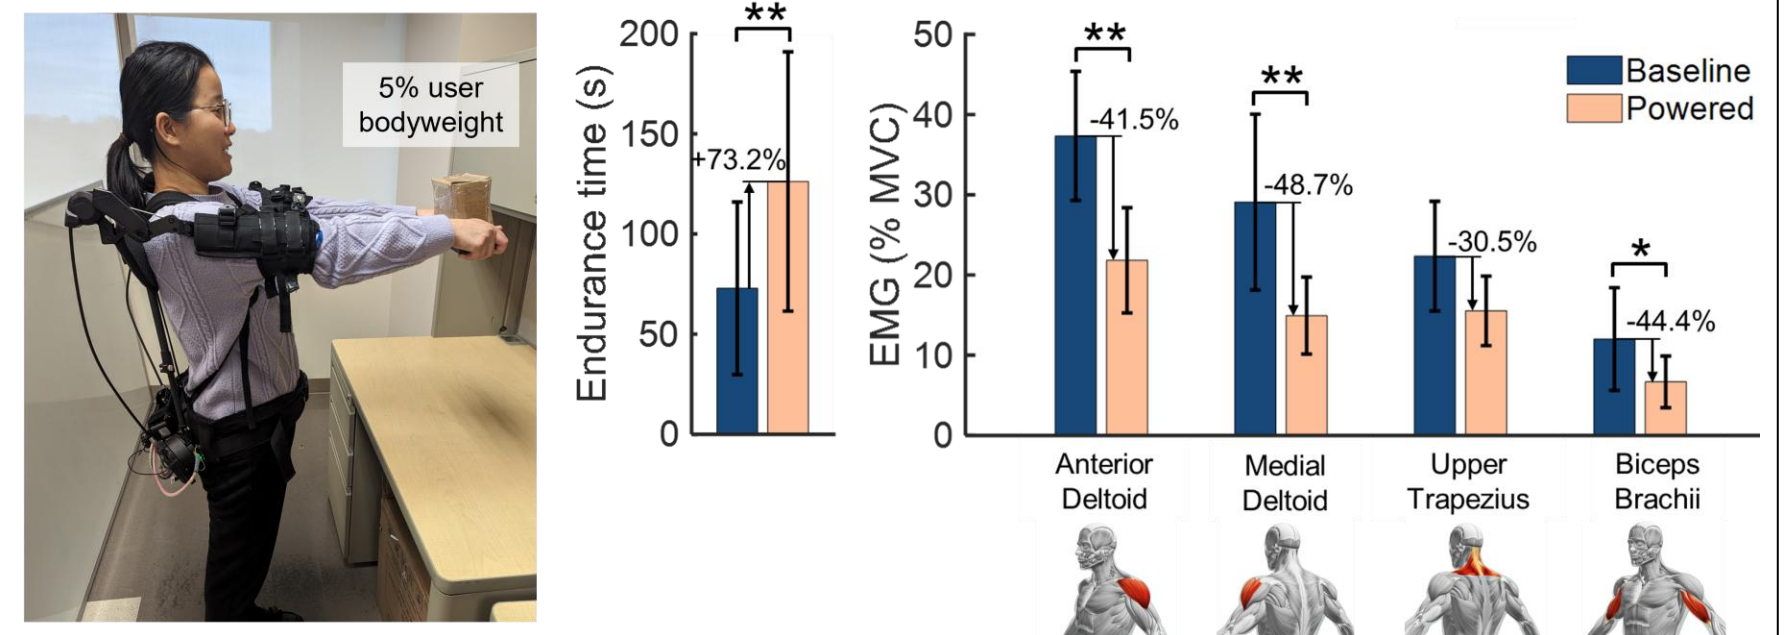

- For all the recorded muscles, muscle activity was reduced with exoskeleton assistance compared to the baseline condition without wearing the device. Average EMG reductions due to assistance were 52.8%, 65.2%, 26.4%, and 31.7% for anterior deltoid, medial deltoid, upper trapezius, and biceps brachii, respectively

A Task 1: Overhead assembly

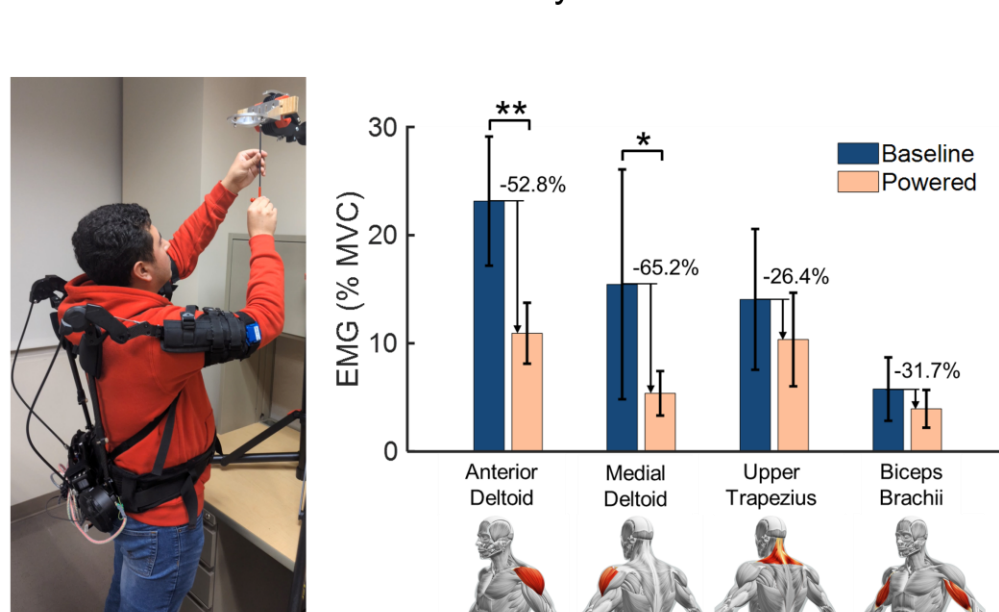

B Task 2: Pick and place

