L6: Learning-based Multi-View Stereo

Hao Su

Agenda

- Photometric Consistency
- A First Pipeline: Deep Volumetric Stereo
- Tricks
  - Adaptive Space Sampling
  - Depth-Normal Consistency Loss
- Appearance Information Capturing

Multi-View Stereo (MVS)

Reconstruct th f **images** and **camera p**

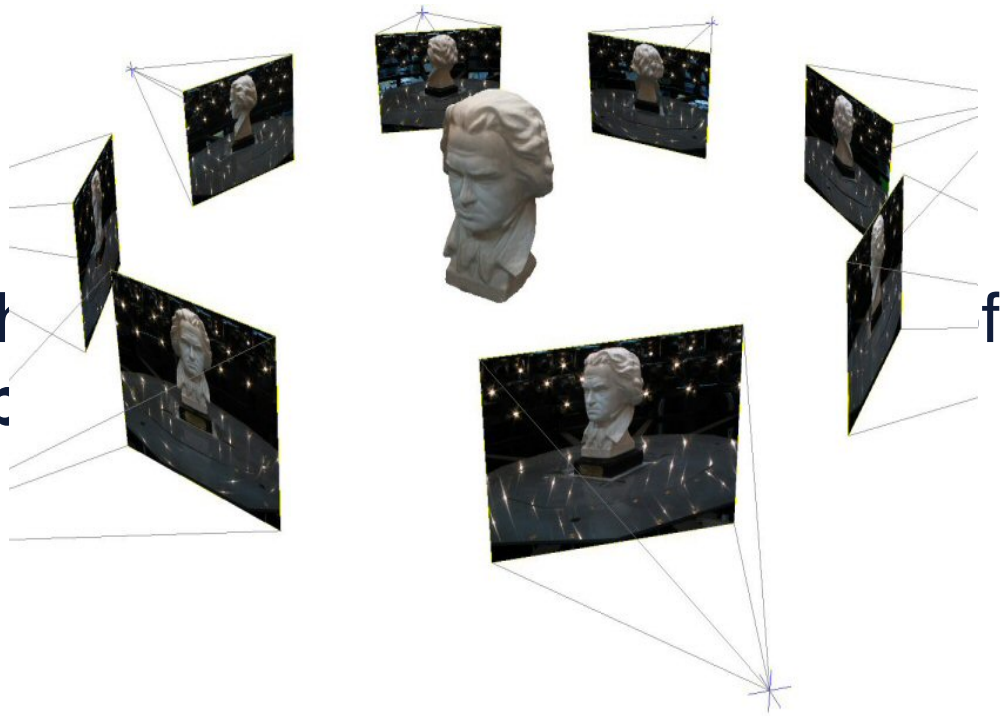

1. Goldlucke et al. “A Super-resolution Framework for High-Accuracy Multiview Reconstruction”

Applications of MVS

AR/VR

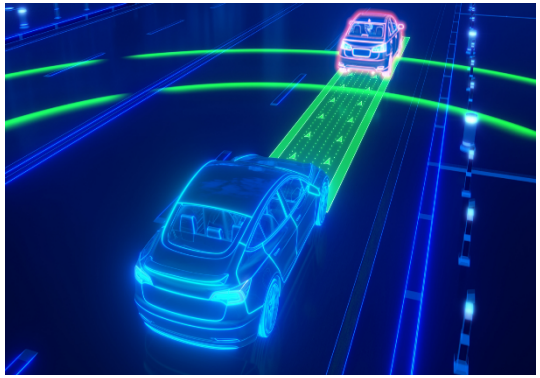

Autonomous Driving

Inverse Engineering

Robot Manipulation

Remote Sensing

Image source:
1. https://wisdomeweb.com/whats-a-lidar-sensor-and-why-it-on-the-iphone-12-pro/
2. https://cloudblogs.microsoft.com/industry-blog/wp-content/uploads/industry/2019/06/
3. https://www.tecnamachines.com/images/
4. https://scienceinfo.net/data-images/thumbs/
5. https://www.altizure.com/

Photometric Consistency

Triangulation

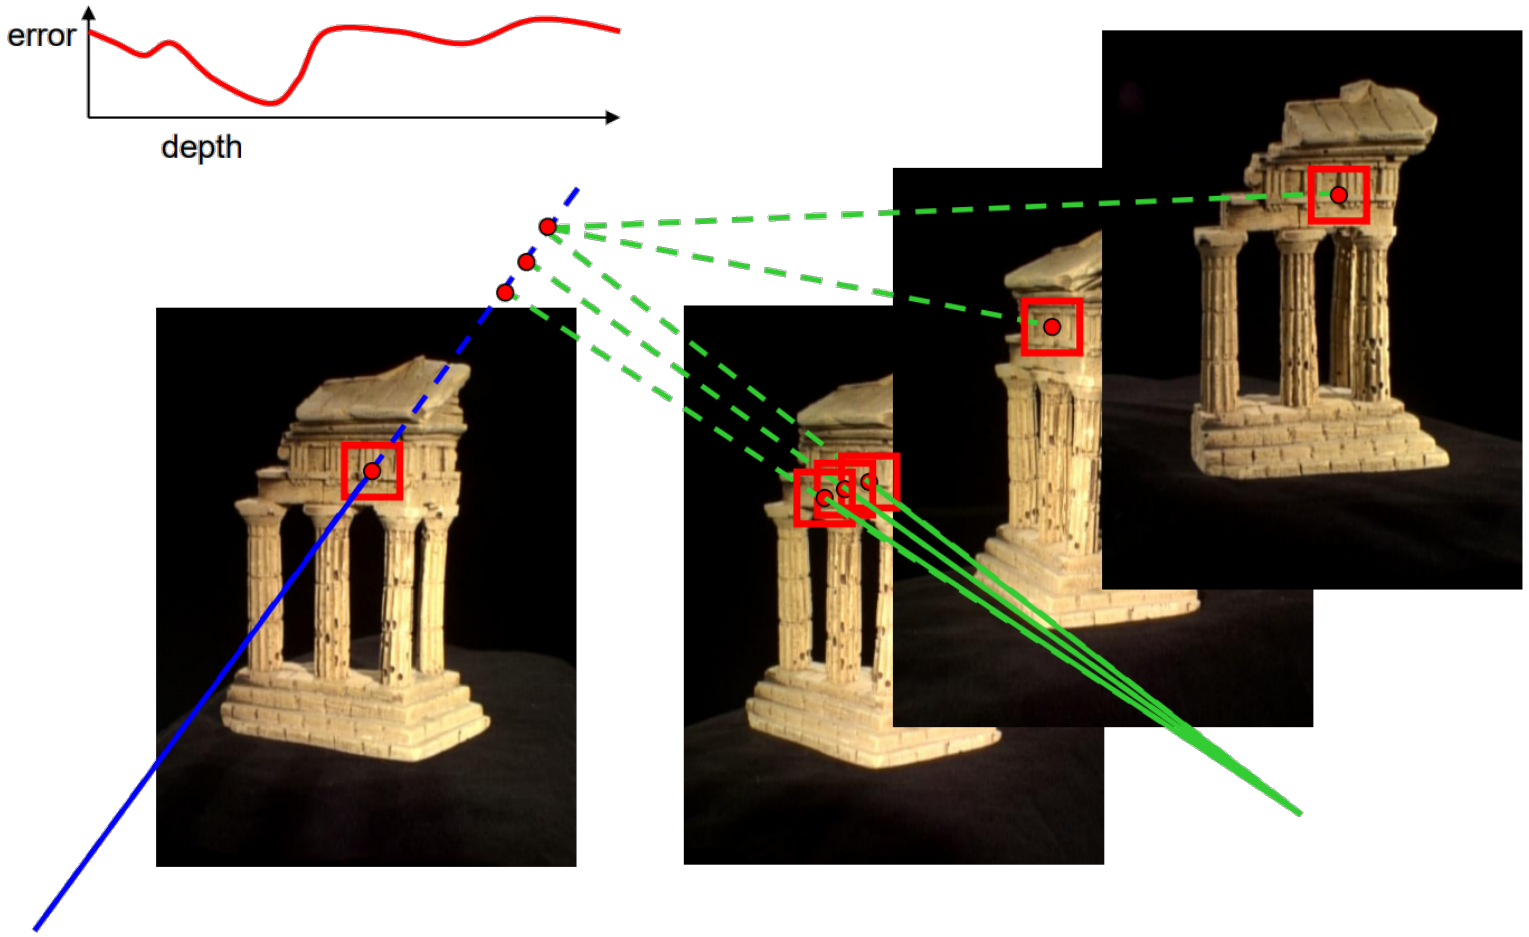

Image source: UW CSE455

Stereo from Community Photo Collections

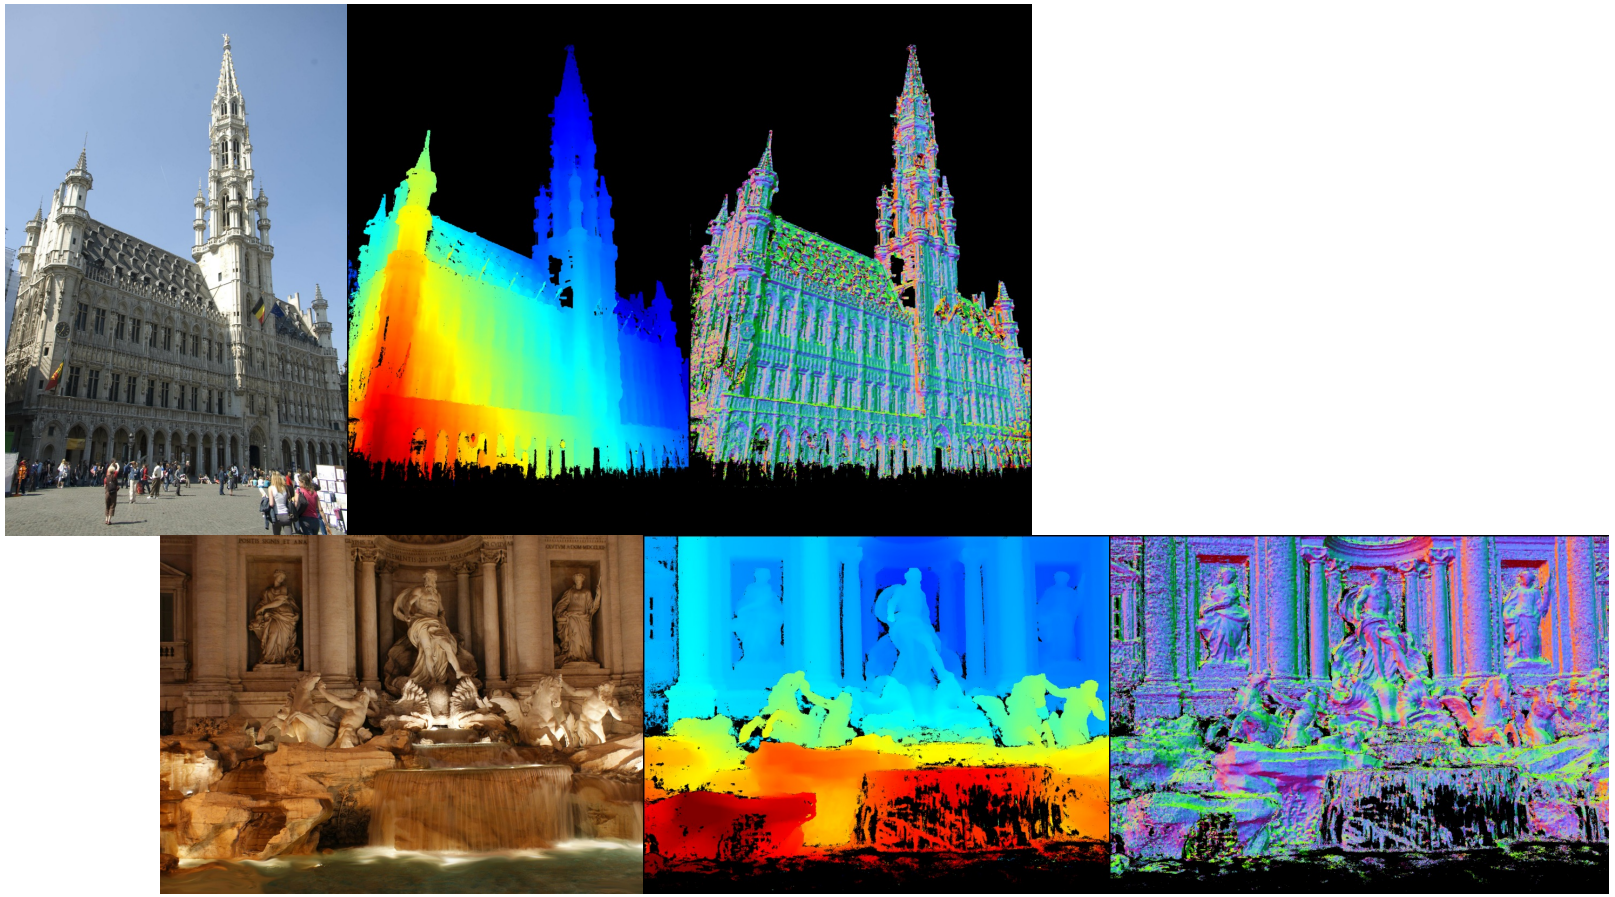

https://colmap.github.io/

Schönberger, Johannes L., Enliang Zheng, Jan-Michael Frahm, and Marc Pollefeys. "Pixelwise view selection for unstructured multi-view stereo." In *European Conference on Computer Vision*, pp. 501-518. Springer, Cham, 2016.

Limitation of Classical MVS

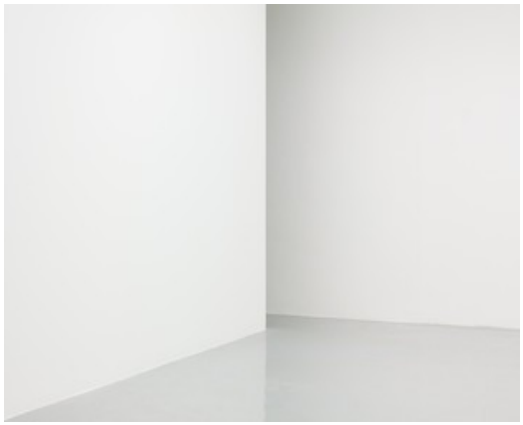

Textureless Area

Reflection /Transparency

Repetitive patterns

Yi Ma, An Introduction to Holistic 3D Reconstruction, ICCV 2019

Learning-based MVS

Learned feature → more robust matching

Shape prior → more complete reconstruction

A First Pipeline:
Deep Volumetric Stereo

Volumetric Stereo

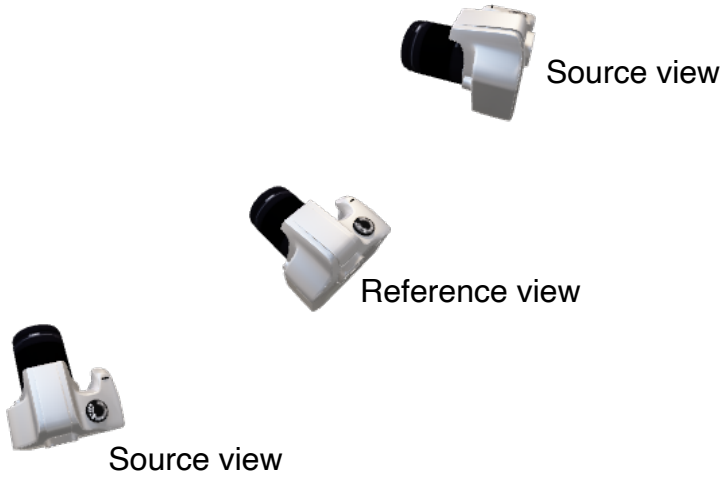

Volumetric Stereo

Reference view
frustum

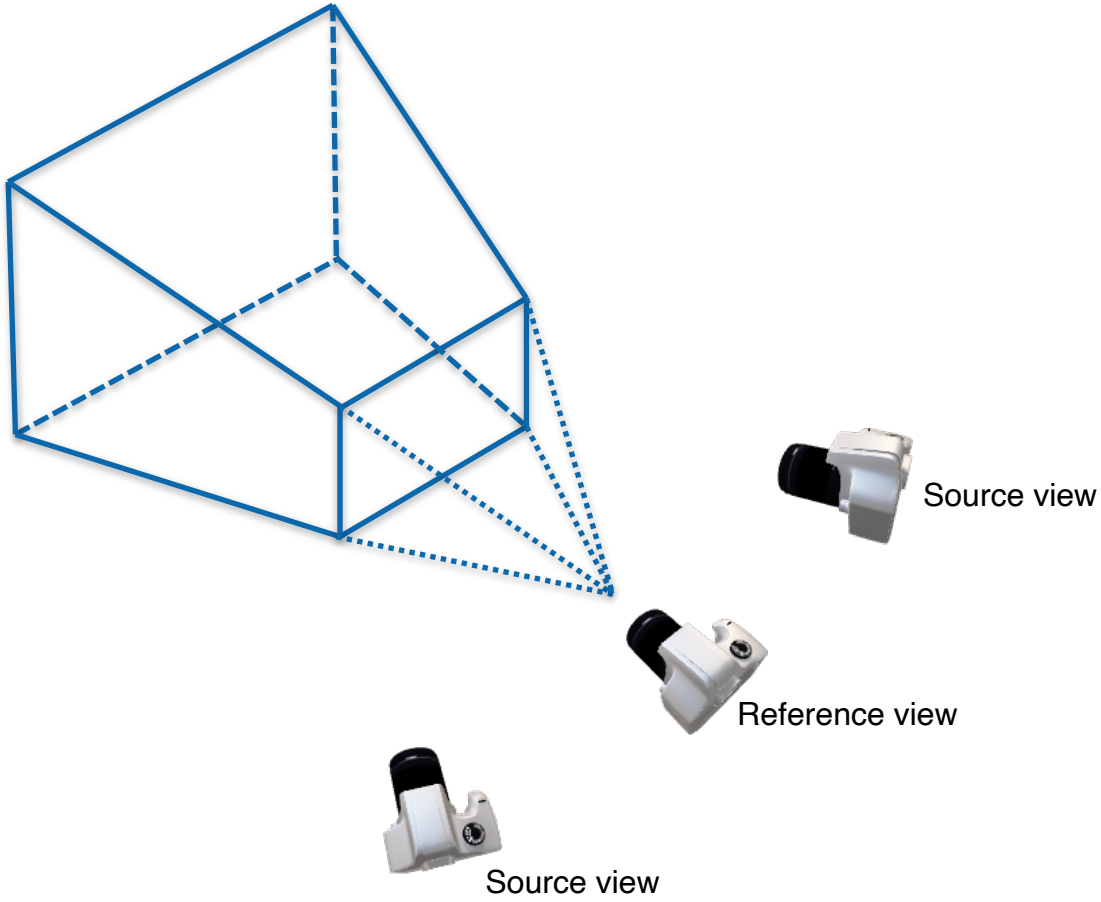

Volumetric Stereo

Reference view
frustum voxelization

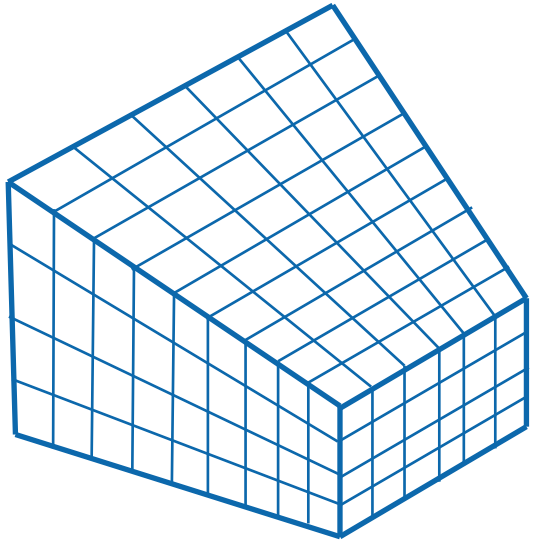

Source view

Reference view

Source view

Volumetric Stereo

Image feature warping

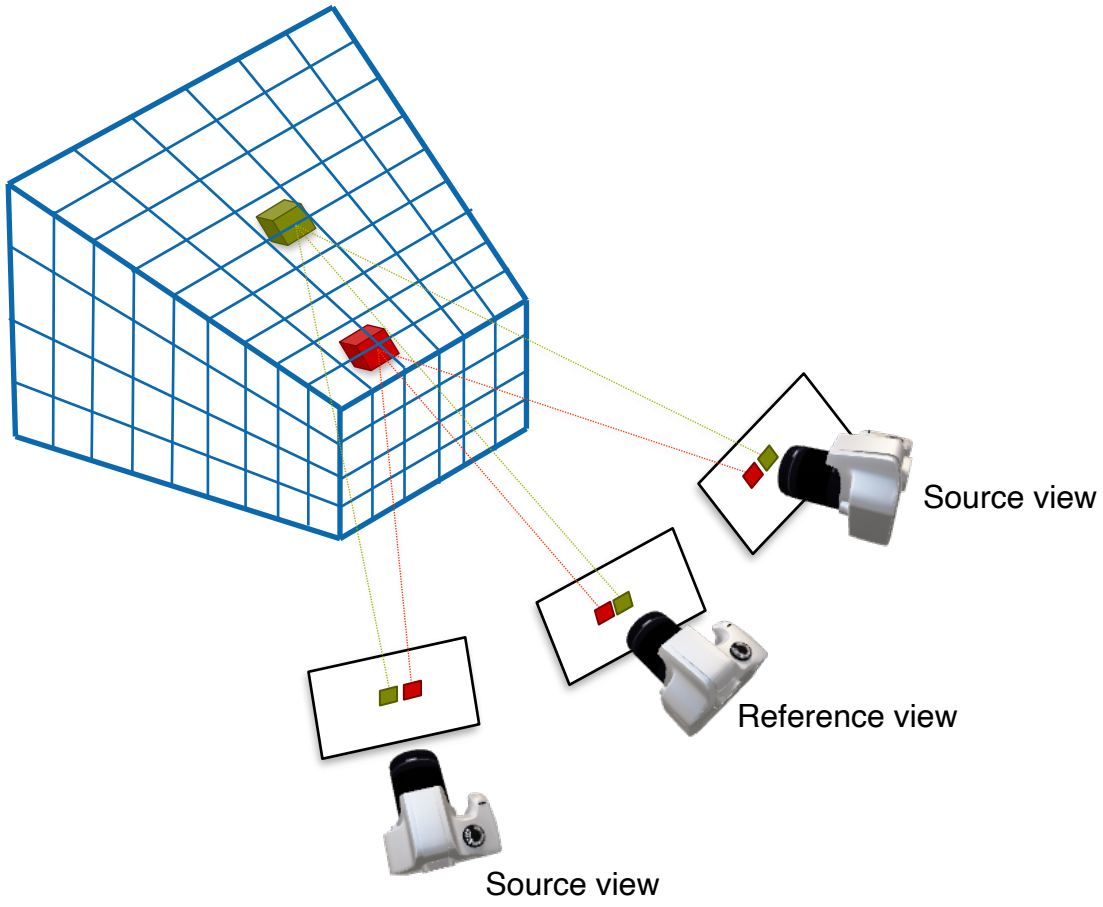

Volumetric Stereo

3D CNNs

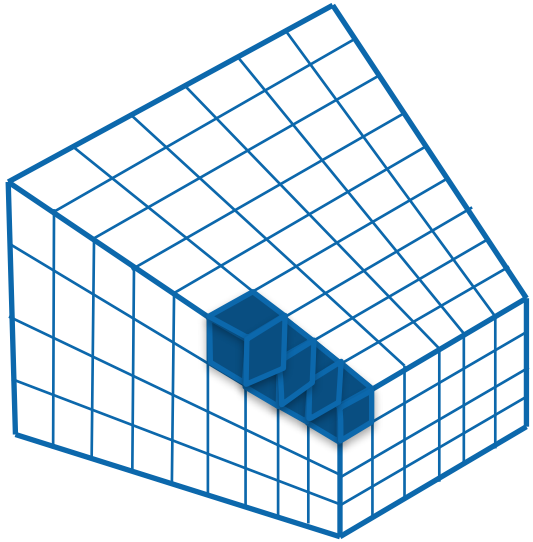

Source view

Reference view

Source view

Volumetric Stereo

Reference view
depth prediction

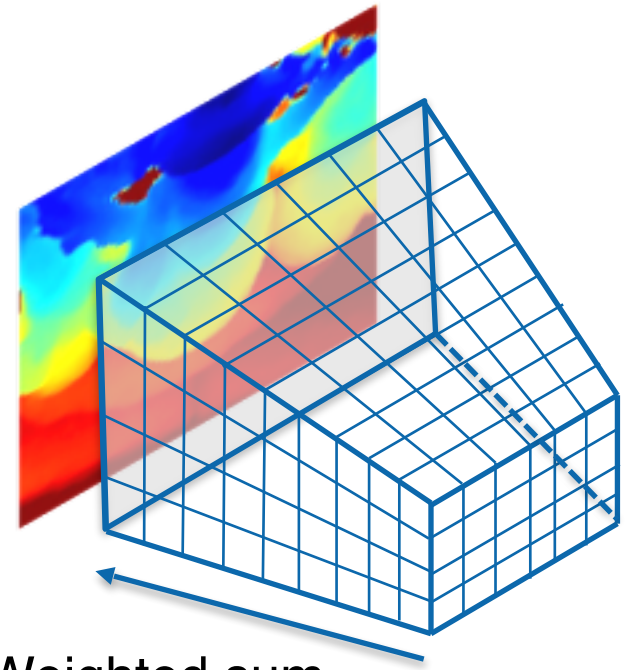

Weighted sum
Along view light

Source view

Reference view

$$\mathbf{D} = \sum_{d=d_{min}}^{d_{max}} d \times \mathbf{P}(d)$$

Source view

Reference-View Depth Loss

$$Loss = \sum_{p \in \mathbf{P}_{\text{valid}}} \left\| d(p) - \hat{d}(p) \right\|_1$$

Valid pixels

GT depth

Depth prediction

Issues

- Quality
- Speed
- Flying points when there is abrupt depth change
- Lacking appearance information

Perspectives for Improvement

- Adaptatively sample the space near the surface
- Stronger loss function

Adaptive Space Sampling

Coarse-to-fine Sampling

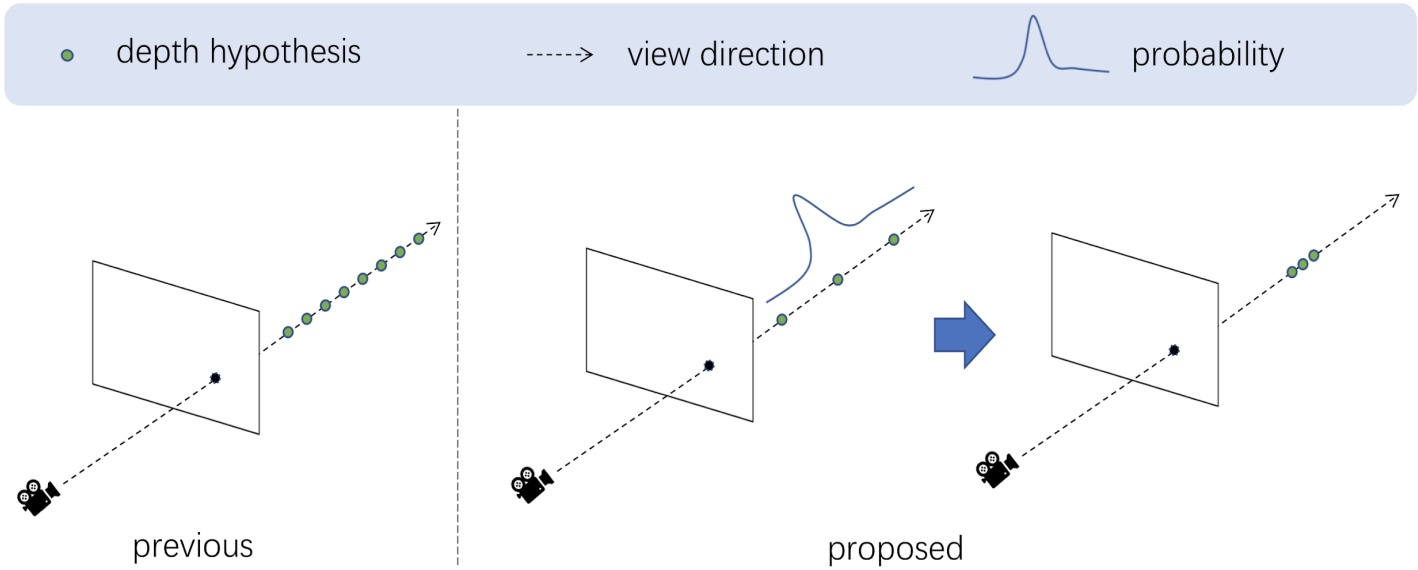

- Analyze per-pixel confidence intervals
- Narrow down the sampling range based on uncertainty

Cheng, Shuo, Zexiang Xu, Shilin Zhu, Zhuwen Li, Li Erran Li, Ravi Ramamoorthi, and Hao Su. "Deep stereo using adaptive thin volume representation with uncertainty awareness." In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 2524-2534. 2020.

Cascaded Depth Prediction

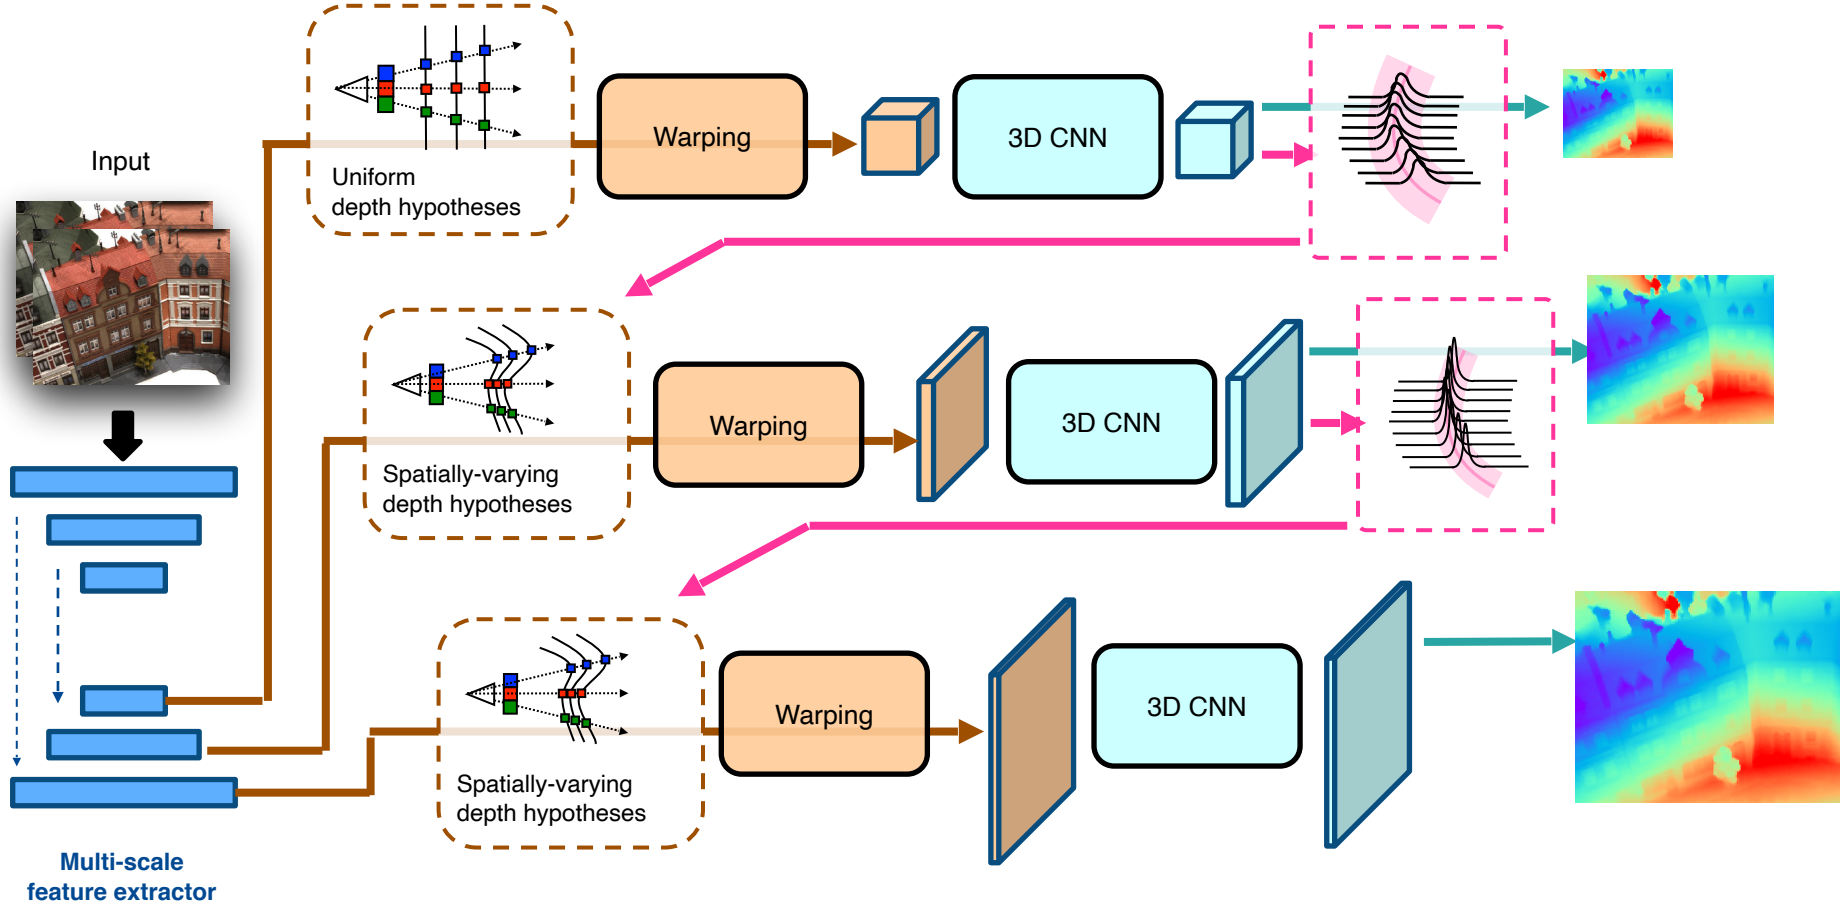

Point-based Multi-View Stereo Network

Point cloud representation

- Suitable for sparse occupancy
- Memory-efficient

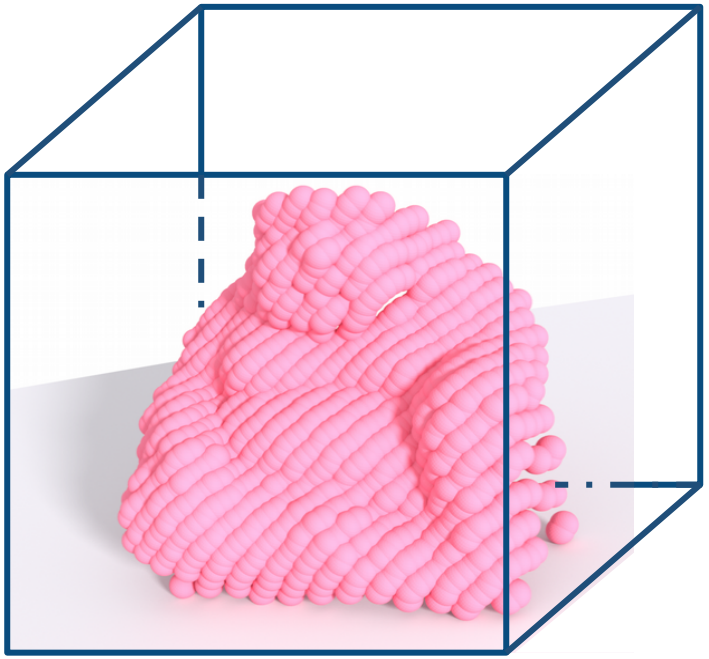

Chen, Rui, Songfang Han, Jing Xu, and Hao Su. "Point-based multi-view stereo network." In Proceedings of the IEEE International Conference on Computer Vision, pp. 1538-1547. 2019.

Architecture

Viewed images

Coarse depth map

Point Flow



Refined depth map



Initial Point Cloud

Estimate **low-resolution** depth map with existing methods



Reference camera

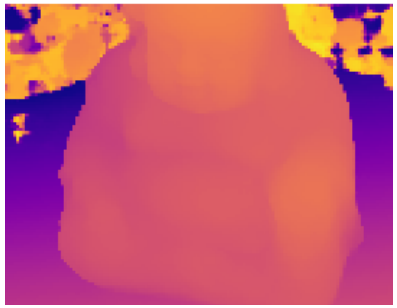

Coarse Depth map

Unprojection

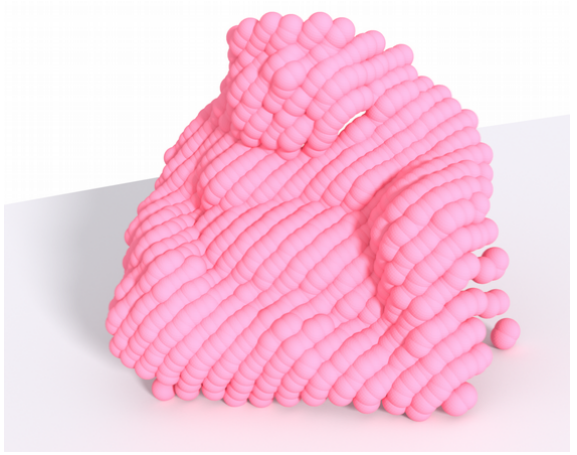

Initial point cloud

Point Flow

Goal:

Refine the input depth map by moving the unprojected points along camera direction

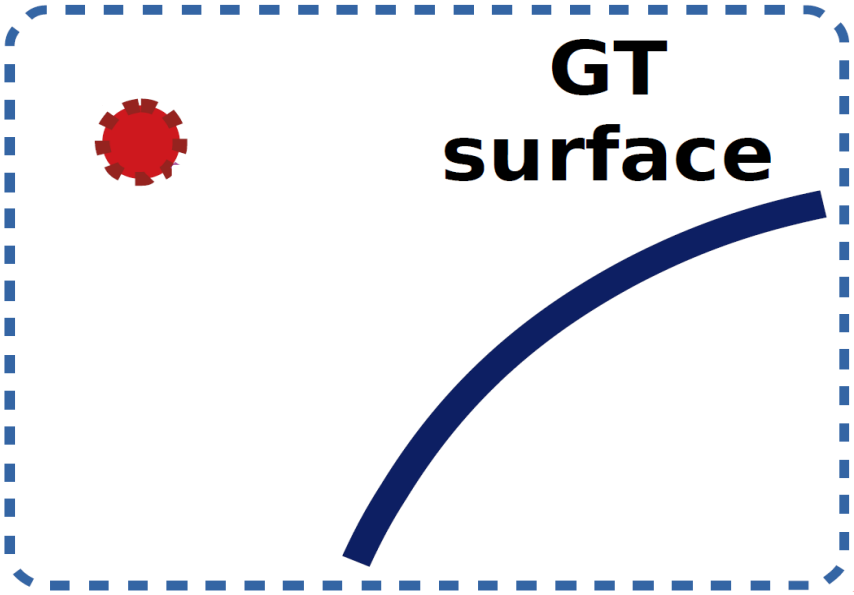

Point Flow

Point Flow: offset to ground truth surface

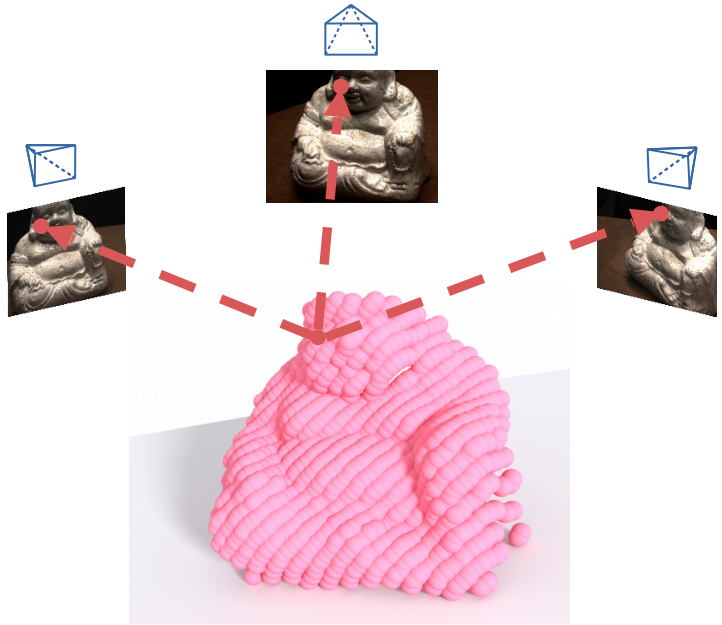

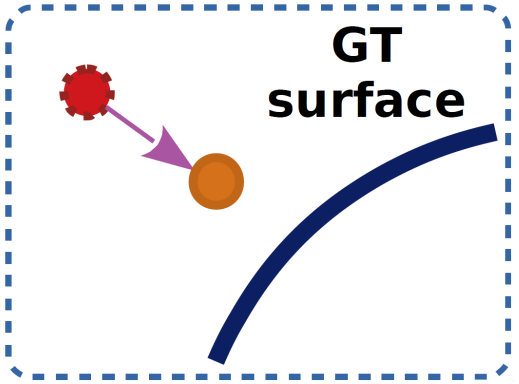

Flow prediction

Point Hypothesis

Point hypothesis: A sequence of points with different offsets

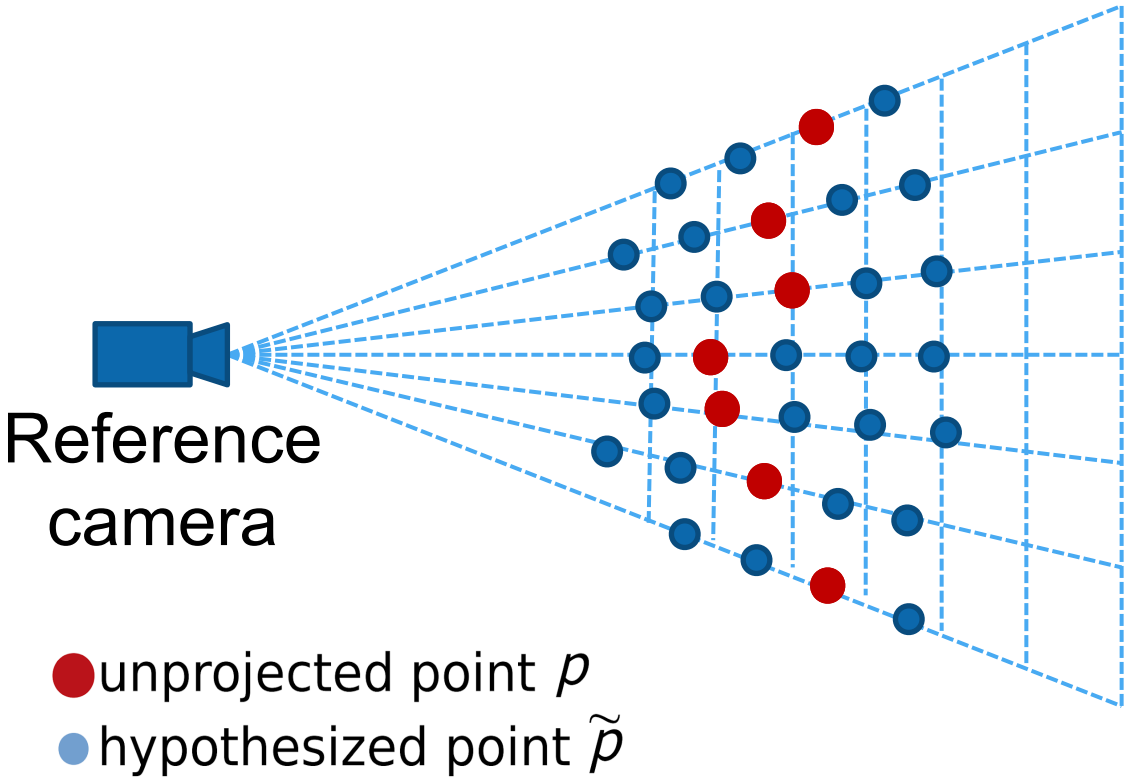

Flow Prediction

Flow prediction as expected offset

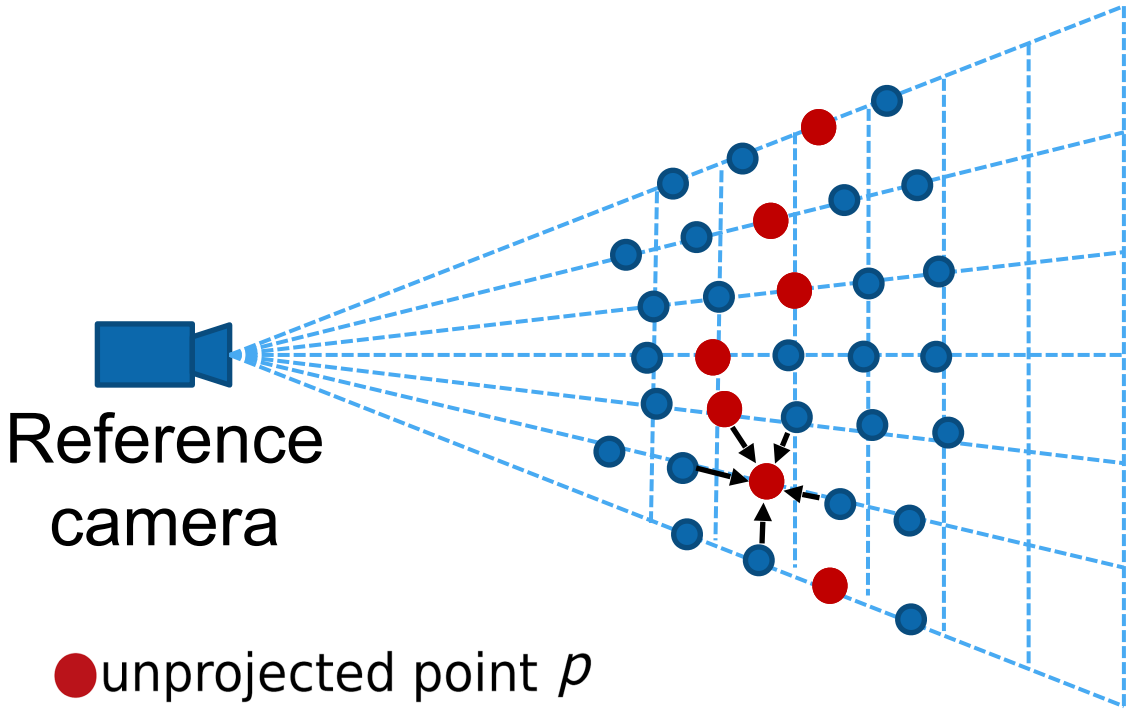

expected offset

$$\Delta d_p = \mathbf{E}(ks) = \sum_{k=-m}^{m} ks \times \mathrm{Prob}(\tilde{\mathbf{p}}_k)$$

Depth-Normal Consistency Loss

Depth Supervision Alone Does Not Give Smooth Surface

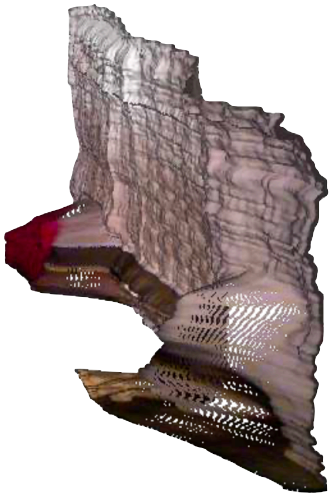

Prediction

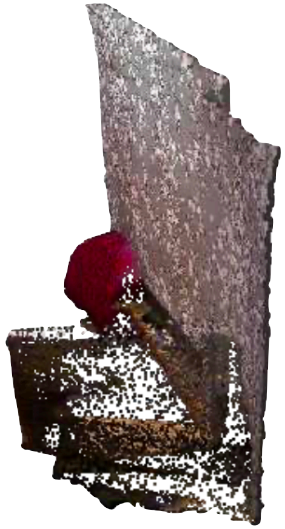

Ground truth

How to Improve Surface Smoothness?

- **Key observation**: Surface smoothness is reflected by surface normal.



Rough surface

Plane surface

Depth Normal Consistency

- Estimate normal along with depth map.
- Regularize depth by normals.

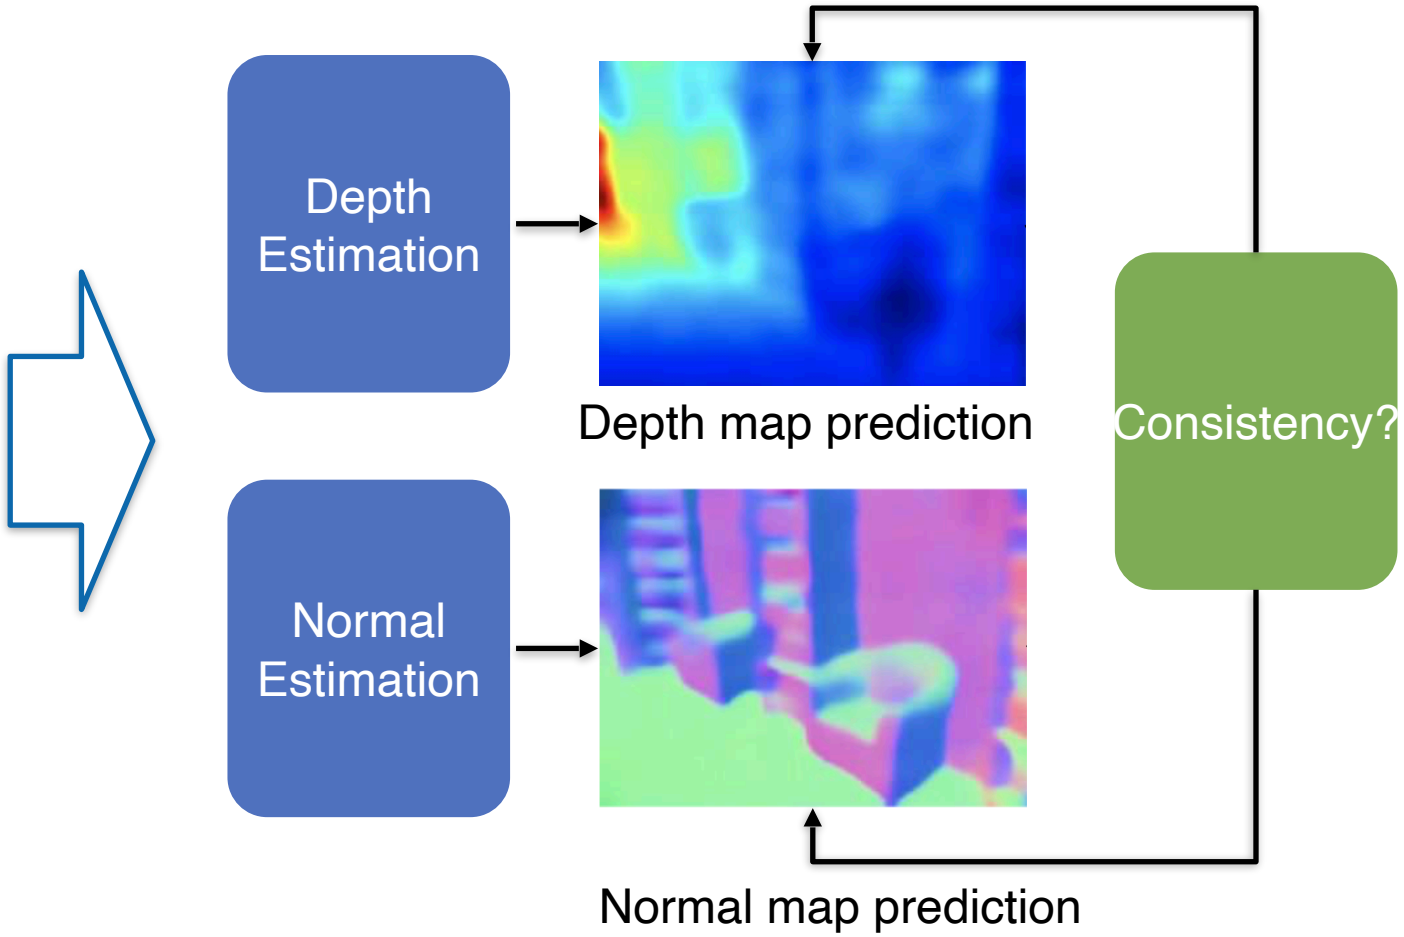

- Practice 1: Normal estimation as an auxiliary loss
  - Already quite effective

- Practice 2: Use normal estimation to correct depth

Observation:
Normal Prediction is Easier

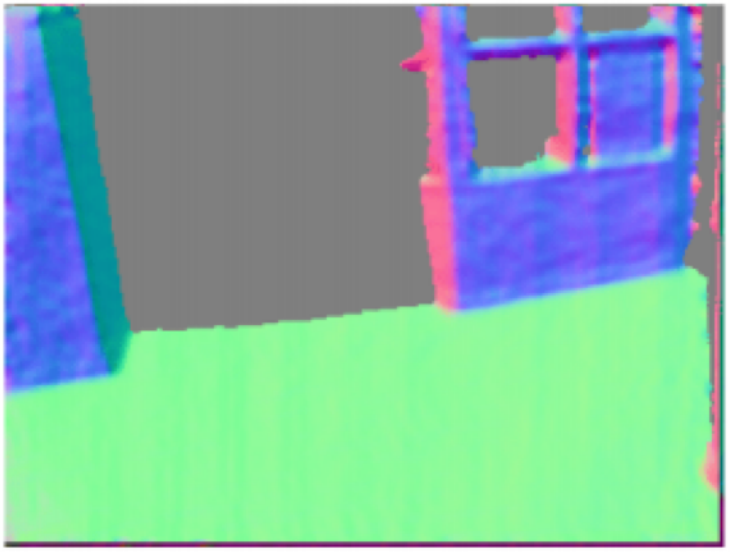

GT Normal

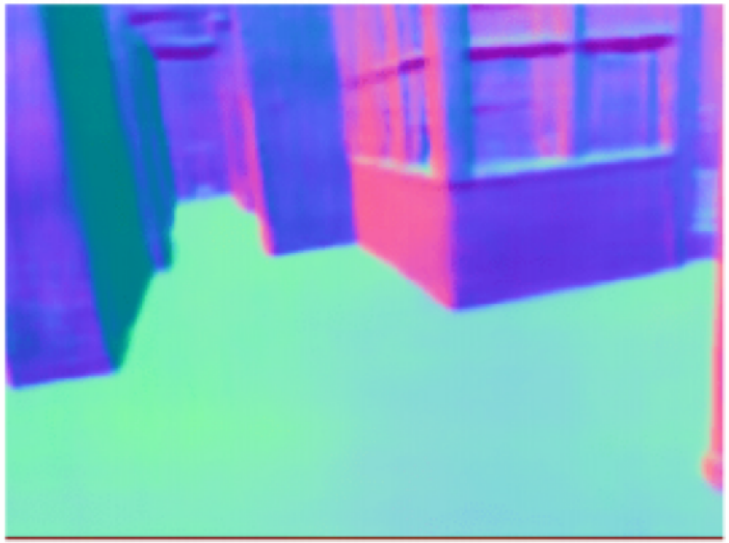

Predicted Normal

Refine Depth from Normal

- **Key assumption**: pixels within a local neighborhood lie on the same tangent plane.

$$\vec{n}^T(p - p_i) = 0$$

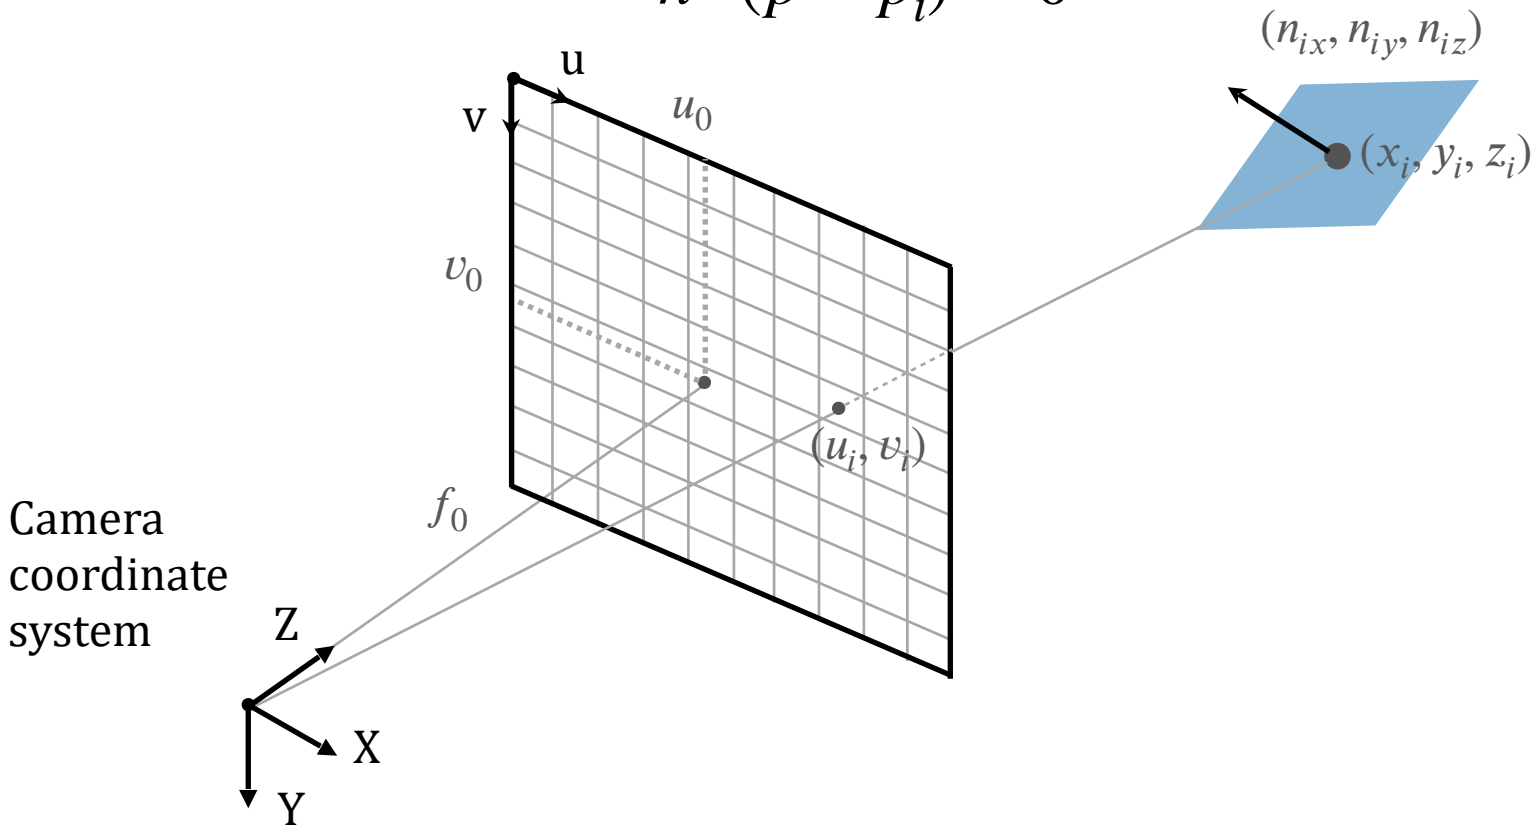

Refine Depth from Normal

- Derive neighbor pixel depth from current pixel normal.

$$z'_{i\to j} = \frac{n_{ix}x_j + n_{iy}y_j + n_{iz}z_j}{(u_i - u_0)n_{ix}/f_0 + (v_i - v_0)n_{iy}/f_0 + n_{iz}}$$

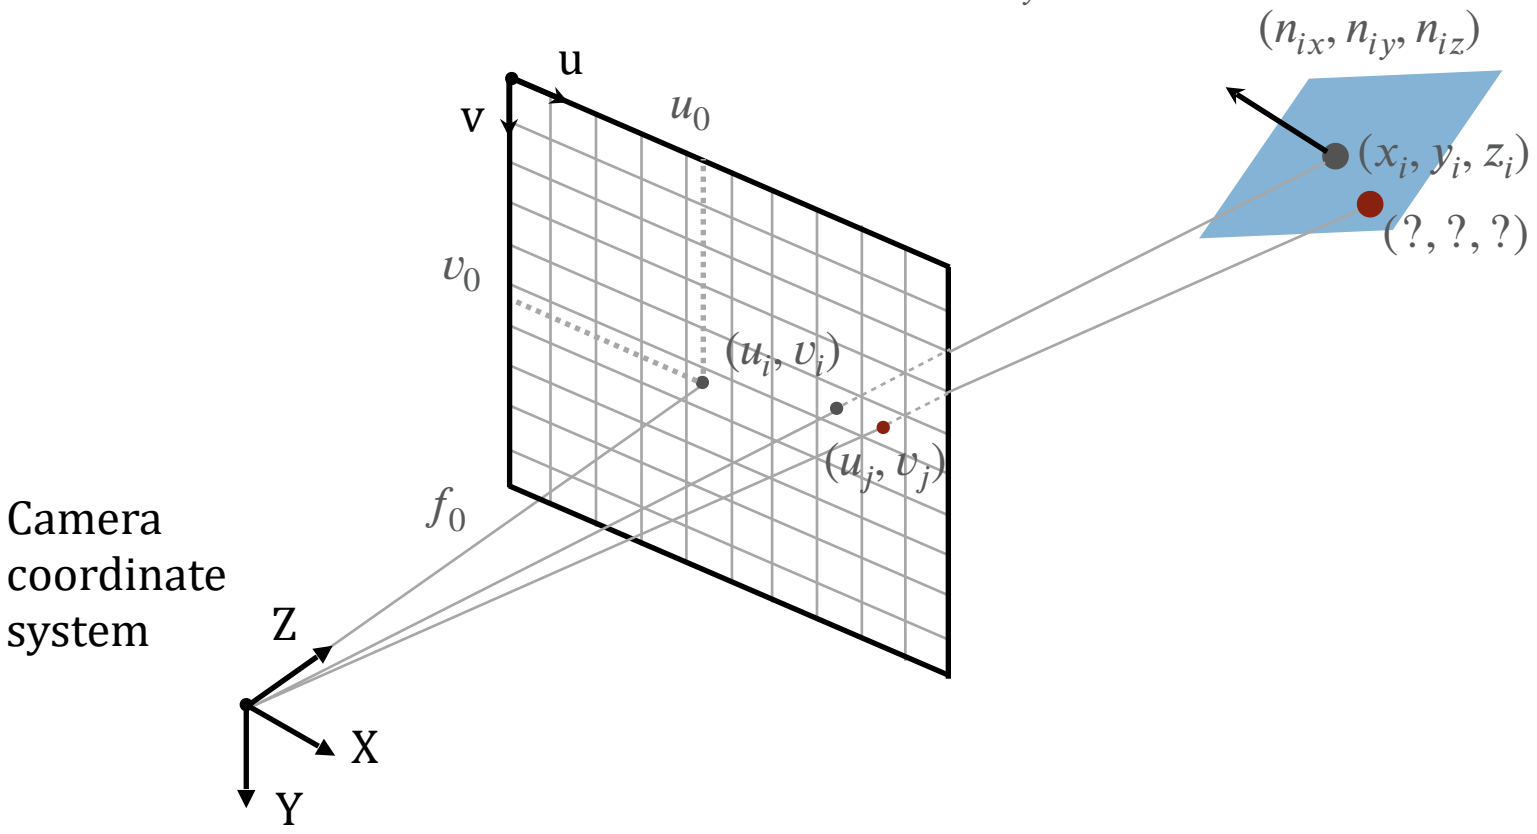

Summary

- Deep volumetric stereo can lead to more robust matching and more complete reconstruction
- But volume-based methods are NOT computationally efficient, since the 3D target scene is sparse
- Adaptive sampling can improve computation efficiency and reconstruction quality
- Normal prediction is easier than depth, and can help improve depth accuracy and smoothness

Appearance Information Capturing

- Photometric-consistency gives geometry

- **Can we also get the appearance information?**

- The appearance of the surface will be observed at views along the camera ray

- If we have a light transport model from the surface along the ray to the pixels, we will know the pixel color

- By comparing the pixel color from the light transport model and from the ground-truth image, we can build a loss

A Light Transport Model

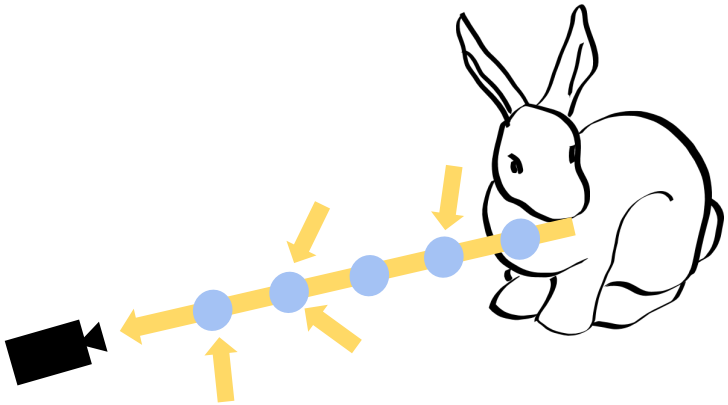

A Light Transport Model

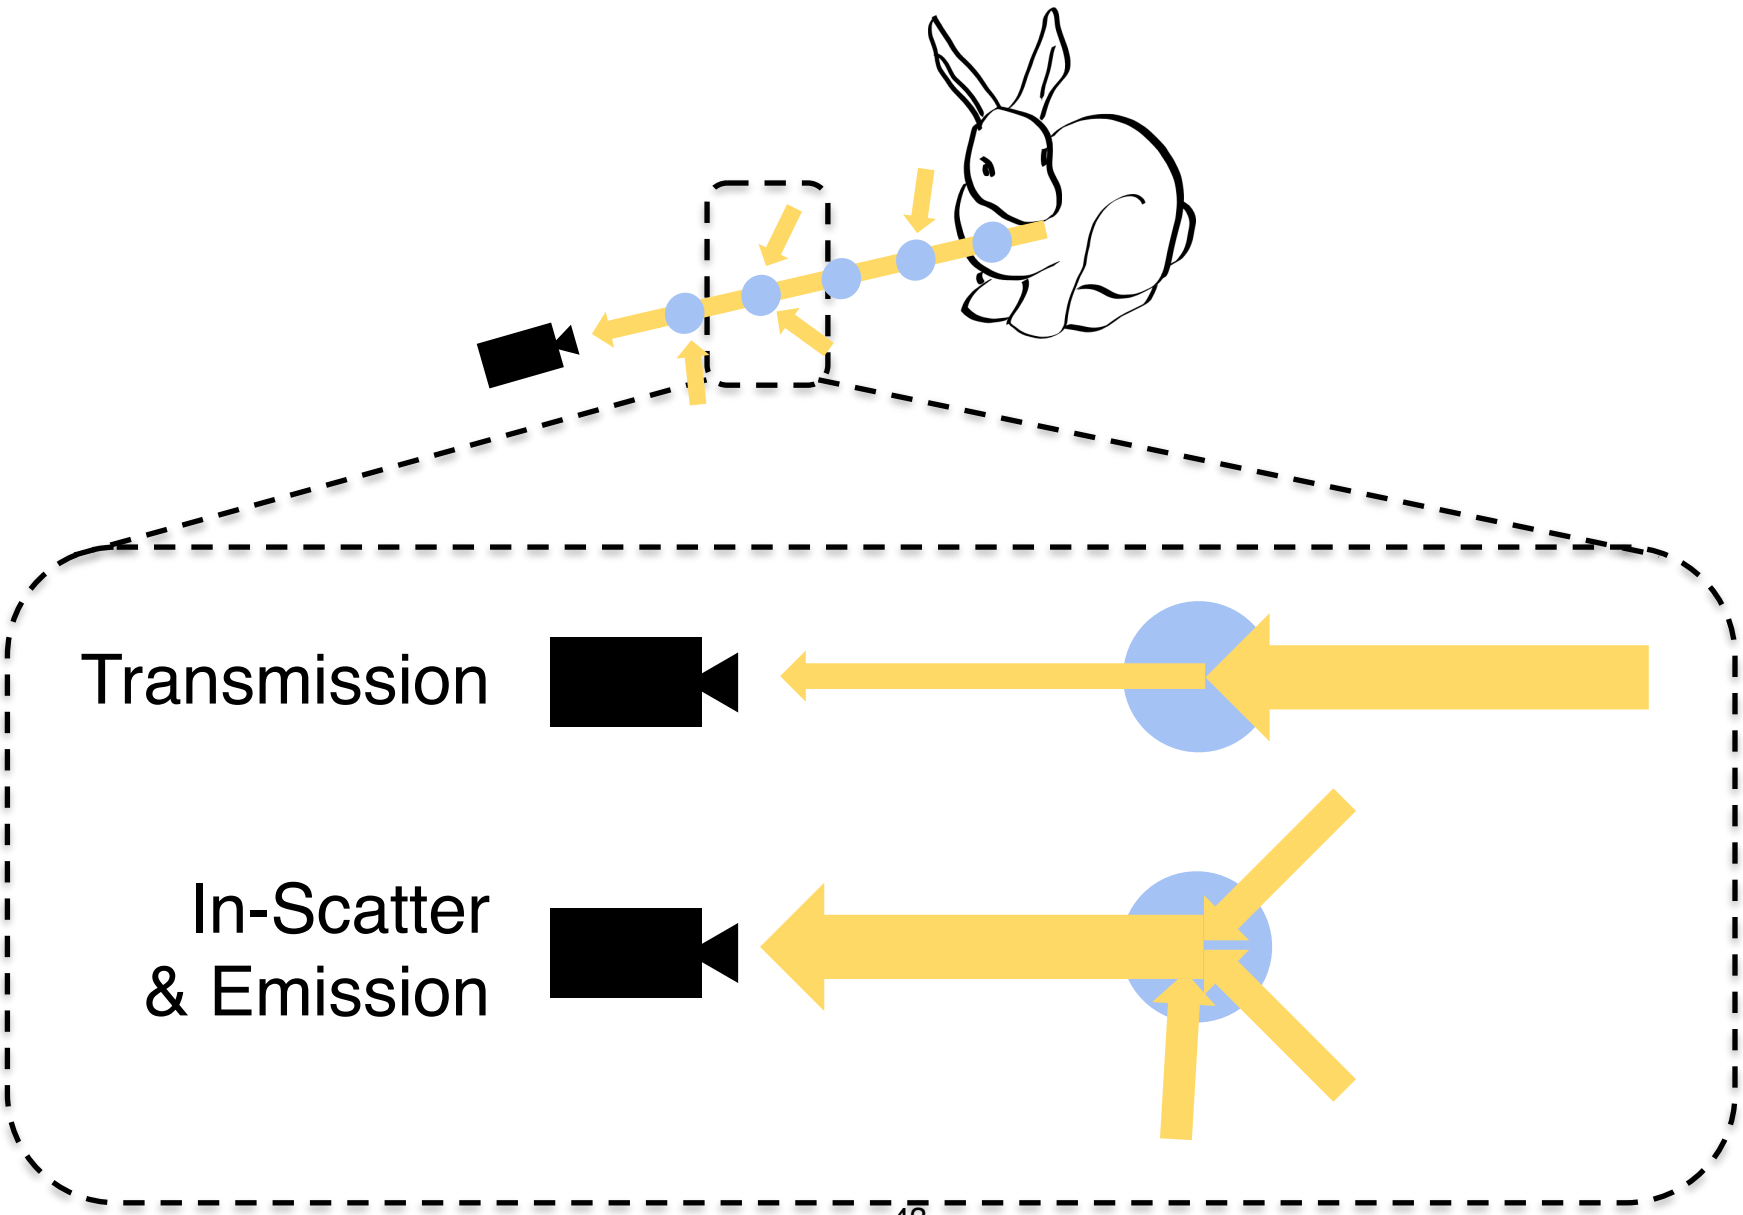

A Light Transport Model

Transmission

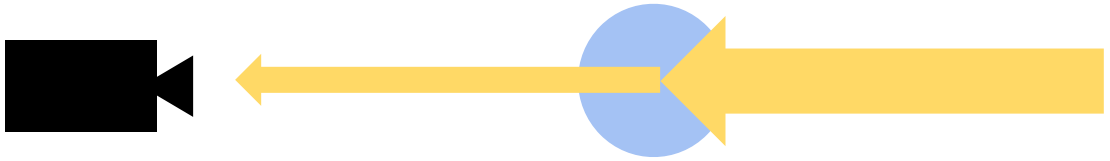

Attenuation coefficient σ (Transparency)

In-Scatter
& Emission

Emission Radiance c

An Implicit Function Approach

- We use networks to predict:
  - The transparency of a point in space is characterized by the attenuation coefficient $\sigma = f(x, y, z)$, so that we know the amount of light coming along the ray to pass the point

  - The additional amount of light shooting out along the ray direction (e.g., emitting radiance at the point or in-scatter radiance) c $= g(x, y, z, \theta, \phi)$

Emission Radiance Passing a Ray Segment

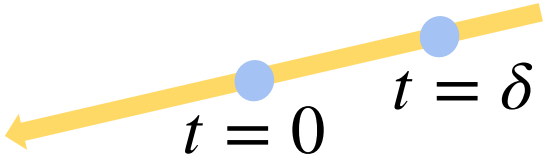

Beer-Lambert's Law: $\alpha(t) = 1 - \exp(-\sigma t)$

opacity

attenuation coefficient

Emission Radiance Passing a Ray Segment

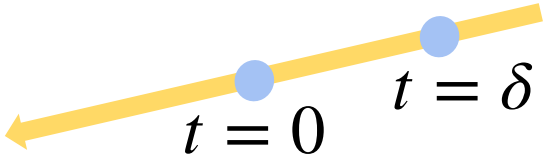

Beer-Lambert's Law: $\alpha(t) = 1 - \exp(-\sigma t)$

opacity

attenuation coefficient

emission radiance

Light emitted along a segment $= \int_0^{\delta} (1 - \alpha(t))c(t)\mathrm{d}t$

Emission Radiance Passing a Ray Segment

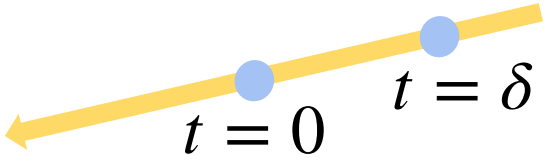

Beer-Lambert's Law: $\alpha(t) = 1 - \exp(-\sigma t)$

Light emitted along a segment

$$= \int_0^{\delta} (1 - \alpha(t)) c(t) \mathrm{d}t \overset{c(t)=c}{\approx} c \int_0^{\delta} \exp(-\sigma t) \mathrm{d}t$$

$$= \frac{c}{\sigma}(1 - \exp(-\delta\sigma))$$

Emission Radiance Passing a Ray Segment

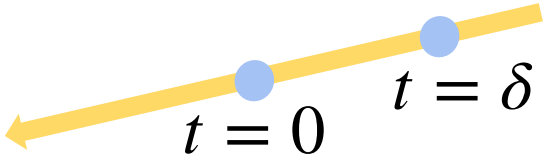

Beer-Lambert's Law: $\alpha(t) = 1 - \exp(-\sigma t)$

Light emitted along a segment

$$= \int_0^{\delta} (1 - \alpha(t)) c(t) \mathrm{d}t \overset{c(t)=c}{\approx} c \int_0^{\delta} \exp(-\sigma t) \mathrm{d}t$$

$$= \frac{c}{\sigma}(1 - \exp(-\delta\sigma)) = \alpha(\delta)\left(\frac{c}{\sigma}\right)$$

Discretized Radiance Integration (Ray Marching)

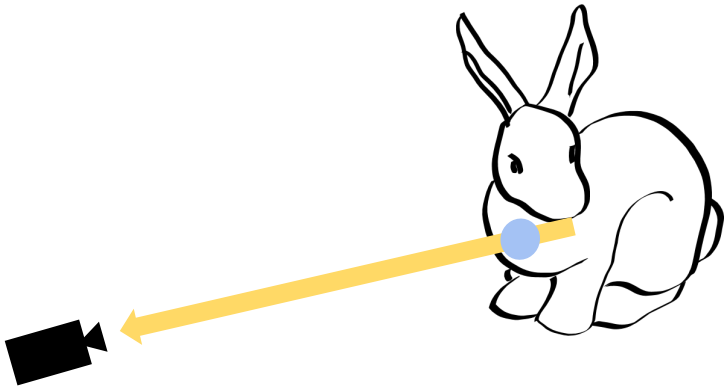

A single point

$$I_1 = \alpha_1 \left(\frac{c_1}{\sigma_1} \right)$$

I_1: light intensity after point 1
c_1: predicted emission radiance at point 1
α_1: opacity of point 1

Discretized Radiance Integration (Ray Marching)

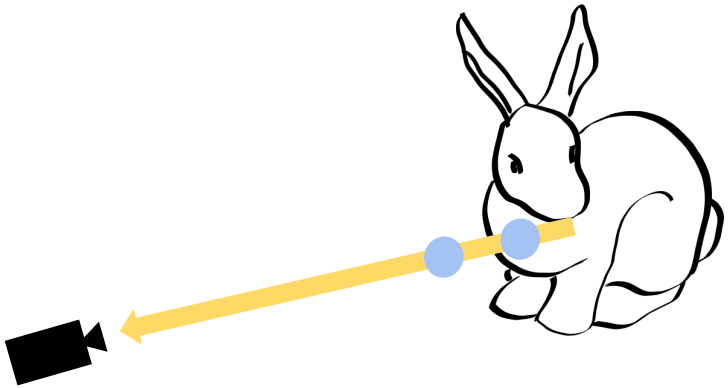

2 points

Point 2 acts like the previous case

$$I_2 = \alpha_2 \left(\frac{c_2}{\sigma_2} \right)$$

Point 1 additionally transmits I_2

$$I_1 = \alpha_1 \left(\frac{c_1}{\sigma_1} \right) + (1 - \alpha_1) I_2$$

Discretized Radiance Integration (Ray Marching)

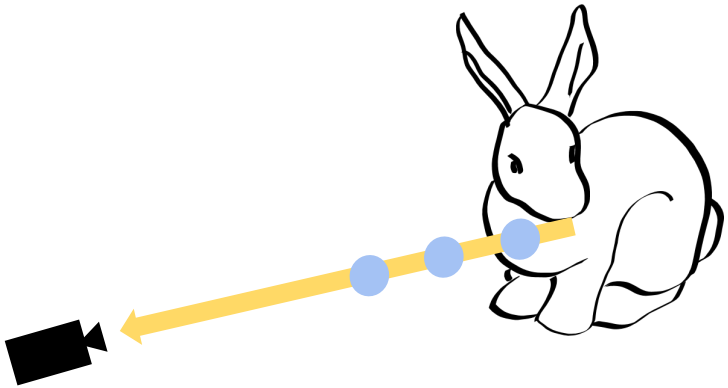

3 points

$$I_3 = \alpha_3 \left(\frac{c_3}{\sigma_3} \right)$$

$$I_2 = \alpha_2 \left(\frac{c_2}{\sigma_2} \right) + (1 - \alpha_2) I_3$$

$$I_1 = \alpha_1 \left(\frac{c_1}{\sigma_1} \right) + (1 - \alpha_1) I_2 + (1 - \alpha_1)(1 - \alpha_2) I_3$$

Discretized Radiance Integration (Ray Marching)

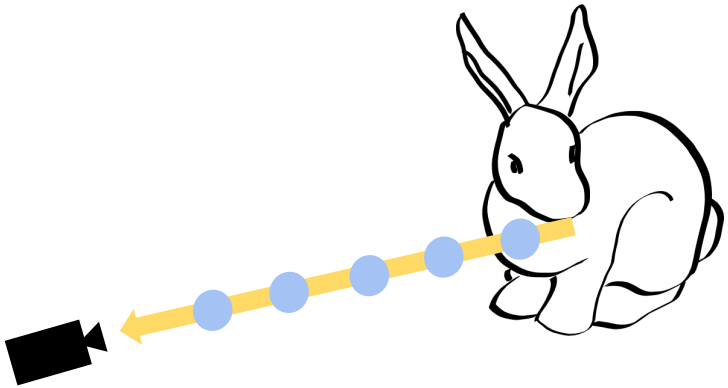

In general

$$T_i = \prod_{j=1}^{i-1} (1 - \alpha_j) = \exp(- \sum_{j=1}^{i-1} \sigma_j \delta_j)$$

$$I = \sum_i T_i \alpha_i \left(\frac{c_i}{\sigma_i} \right) = \text{final radiance of the ray}$$

Discretized Radiance Integration (Ray Marching)

$$(\sigma_i, \frac{c_i}{\sigma_i}) = F_\Theta(x, y, z, \theta, \phi)$$

Note: It is quite common that σ_i and c_i are both close to zero, so we predict c_i/σ_i directly.

Pixel Loss

$$I = \sum_i T_i \alpha_i \left(\frac{c_i}{\sigma_i} \right)$$

Comparing I with ground-truth pixel value, we get a loss (e.g., L1, L2)

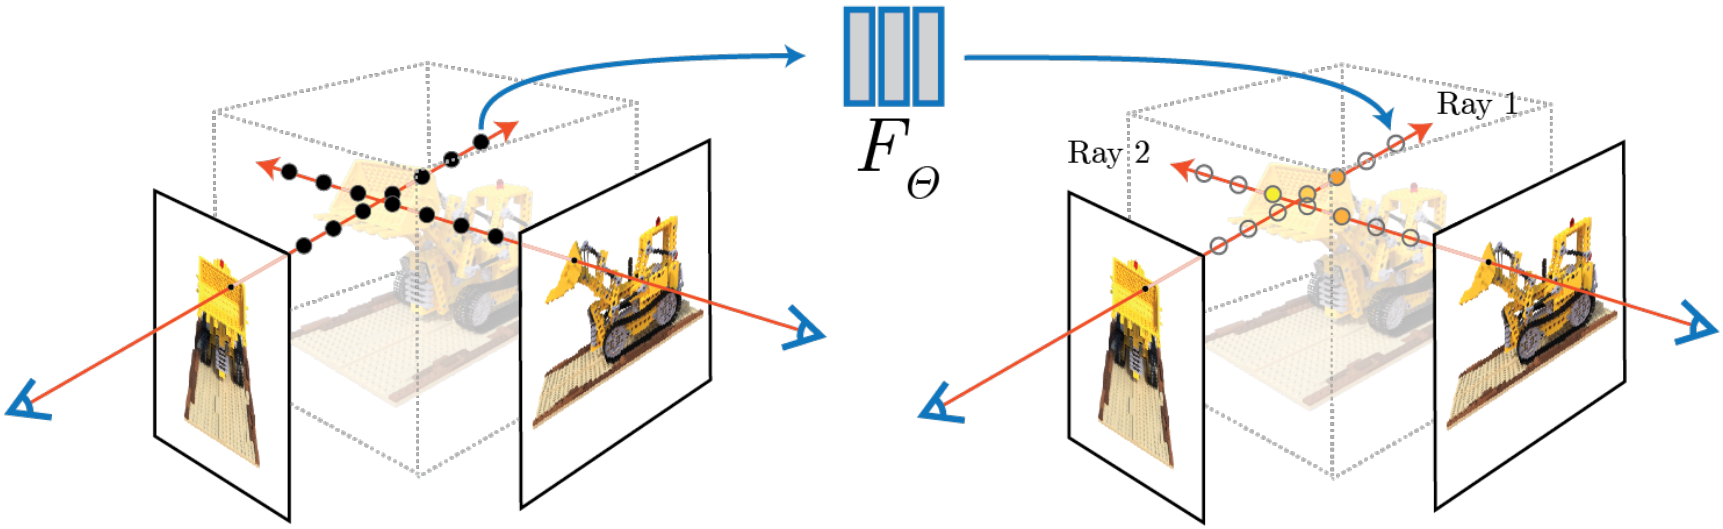

Train Pipeline (as in NeRF)

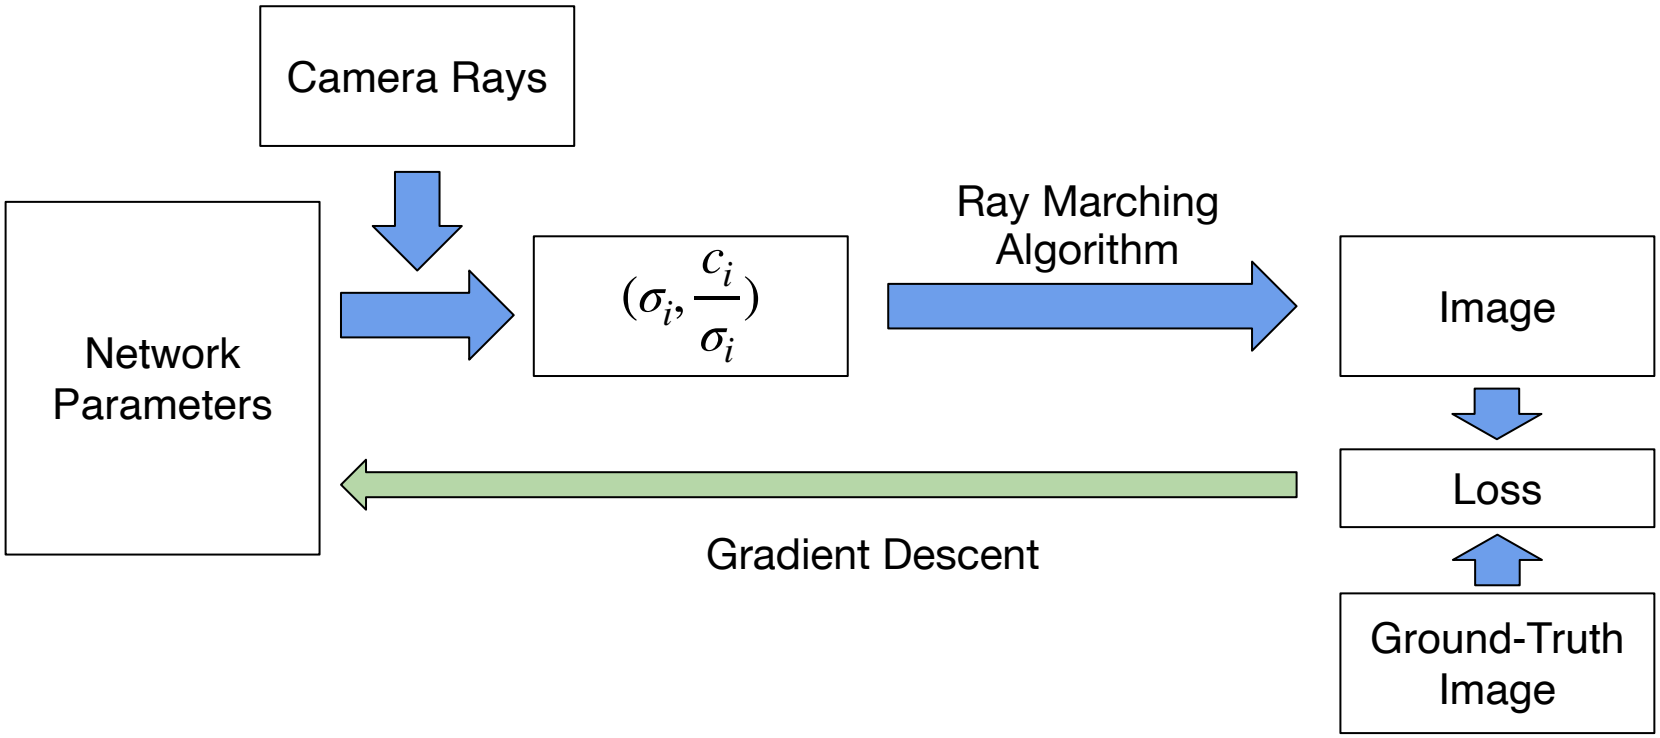

- Optimize on a single scene
  - store the scene in weights of the network
- Require ground-truth camera parameters

Result

- Novel view synthesis following light transport model (F_Θ optimized from ~100 views)

Summary

- We have described a volumetric rendering-based loss function for 3D estimation
- The approach takes an implicit neural function representation, allowing for infinite resolution
- This is an example of ***physics-based deep learning*** pipeline
- Knowing the domain knowledge is helpful for building network architecture!