802.11: mobility within same subnet

- H1 remains in same IP subnet: IP address can remain same
- switch: which AP is associated with H1?
  - self-learning (Ch. 5): switch will see frame from H1 and "remember" which switch port can be used to reach H1

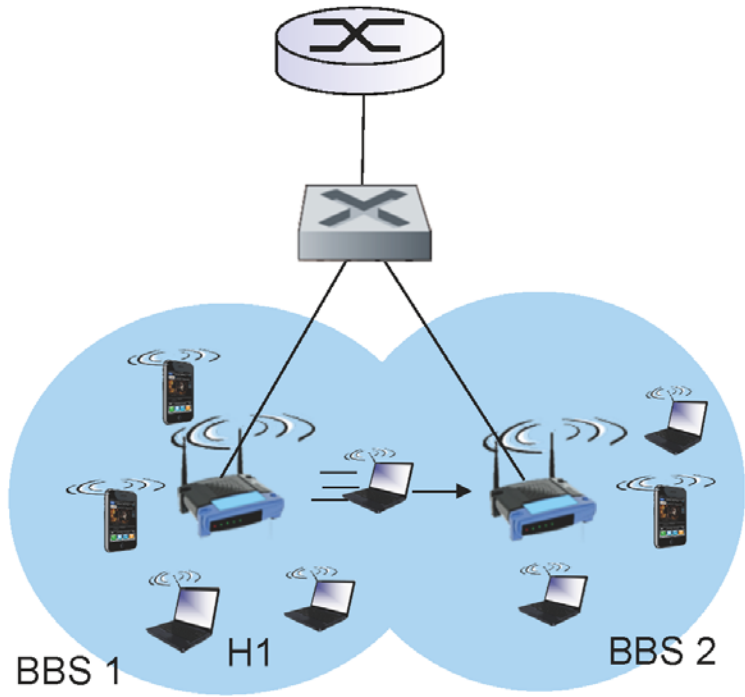

802.11: advanced capabilities

Rate adaptation

- base station, mobile dynamically change transmission rate (physical layer modulation technique) as mobile moves, SNR varies

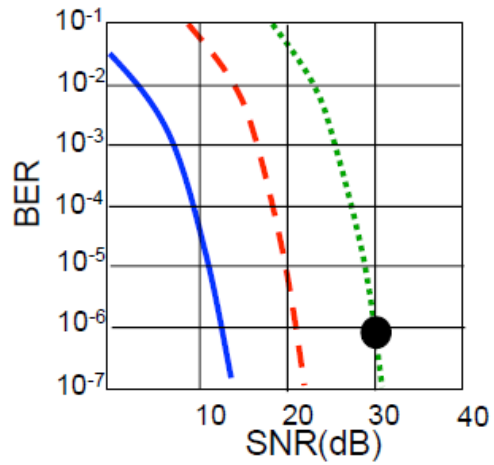



1. SNR decreases, BER increase as node moves away from base station

2. When BER becomes too high, switch to lower transmission rate but with lower BER

Collision Avoidance: RTS-CTS exchange

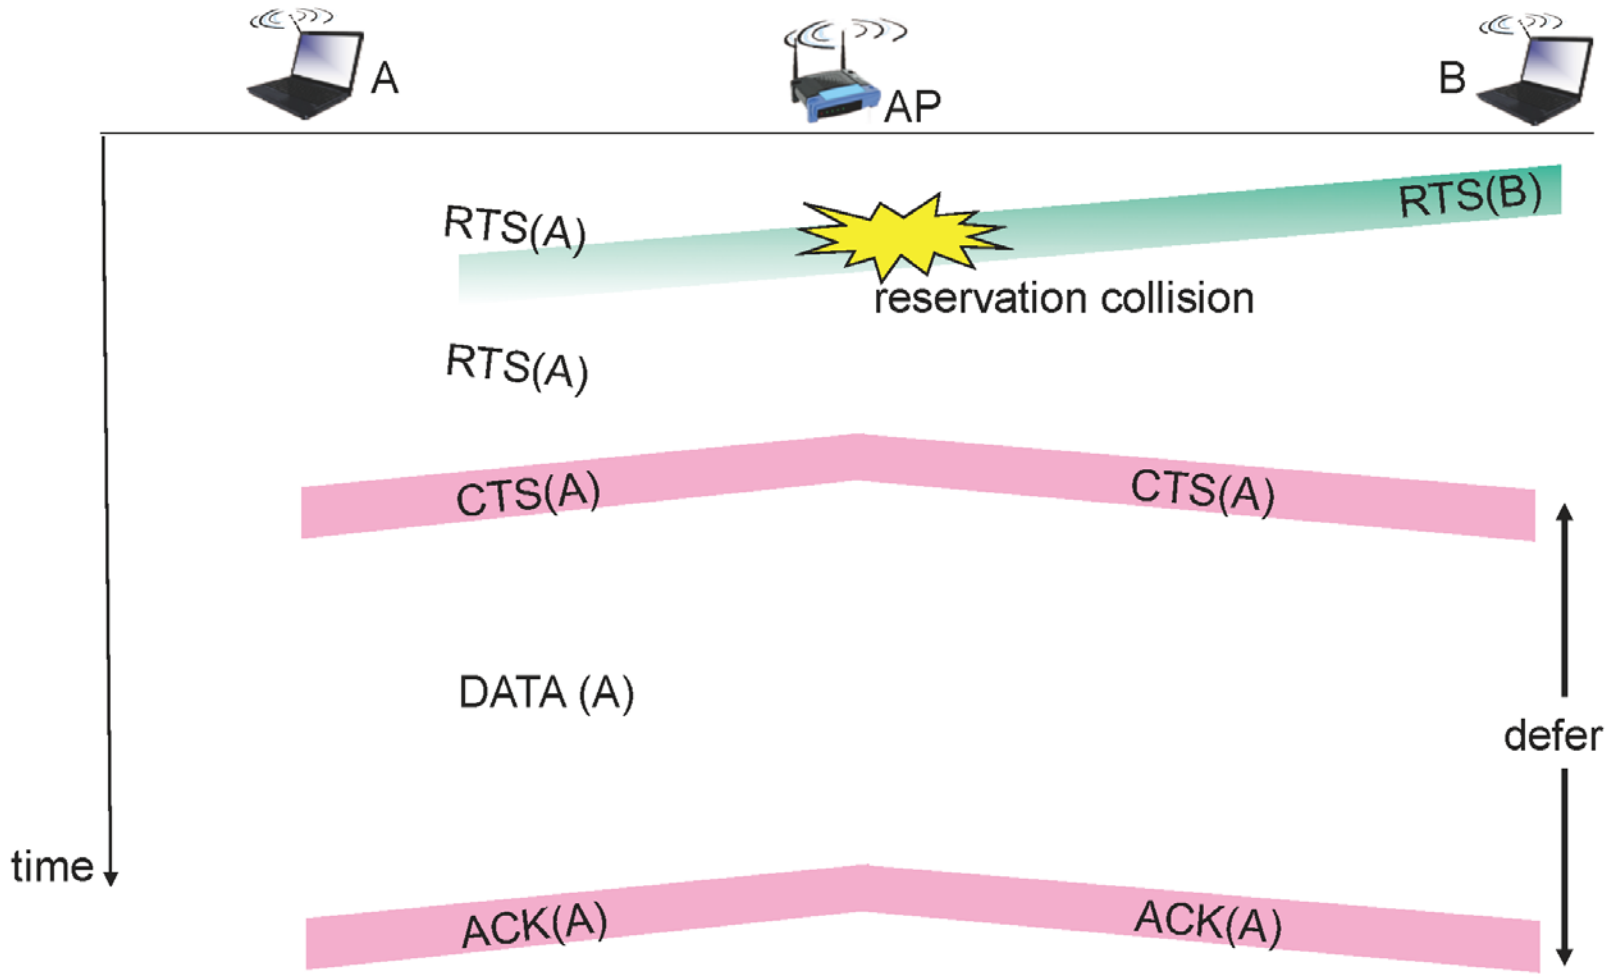

Chapter 6 outline

6.1 Introduction

Wireless

6.2 Wireless links, characteristics
- CDMA

6.3 IEEE 802.11 wireless LANs ("Wi-Fi")

6.4 Cellular Internet access
- architecture
- standards (e.g., GSM)

Mobility

6.5 Principles: addressing and routing to mobile users

6.6 Mobile IP

6.7 Handling mobility in cellular networks

6.8 Mobility and higher-layer protocols

6.9 Summary

Components of cellular network architecture

MSC
- connects cells to wired tel. net.
- manages call setup (more later!)
- handles mobility (more later!)

cell
- covers geographical region
- *base station* (BS) analogous to 802.11 AP
- *mobile users* attach to network through BS
- *air-interface:* physical and link layer protocol between mobile and BS

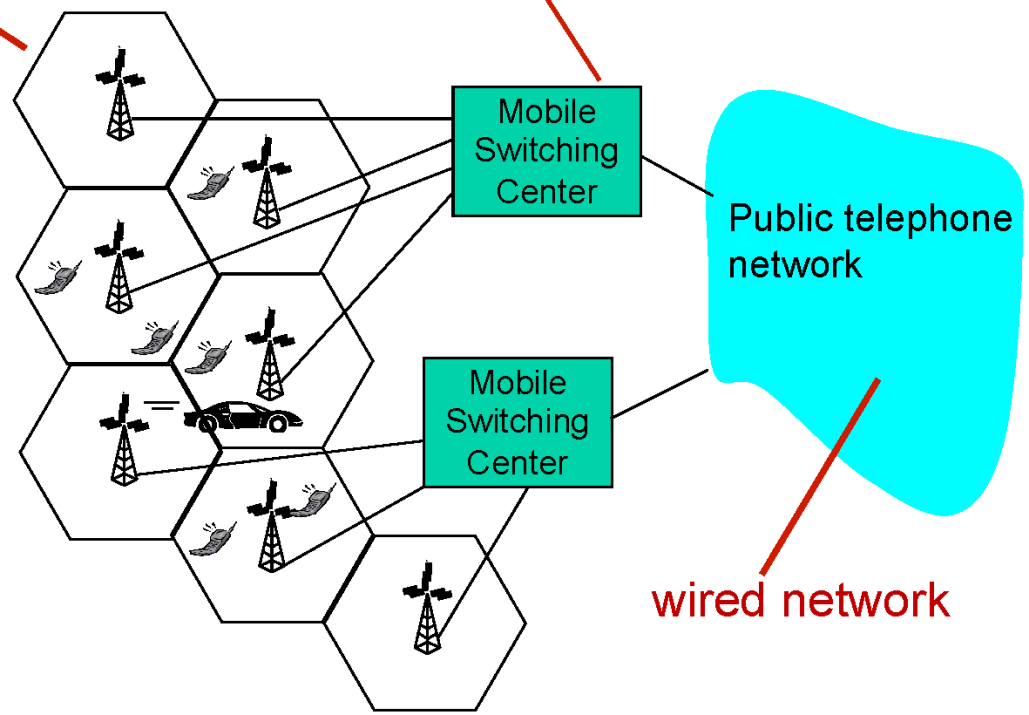

Cellular networks: the first hop

Two techniques for sharing mobile-to-BS radio spectrum

- combined FDMA/TDMA: divide spectrum in frequency channels, divide each channel into time slots
- CDMA: code division multiple access

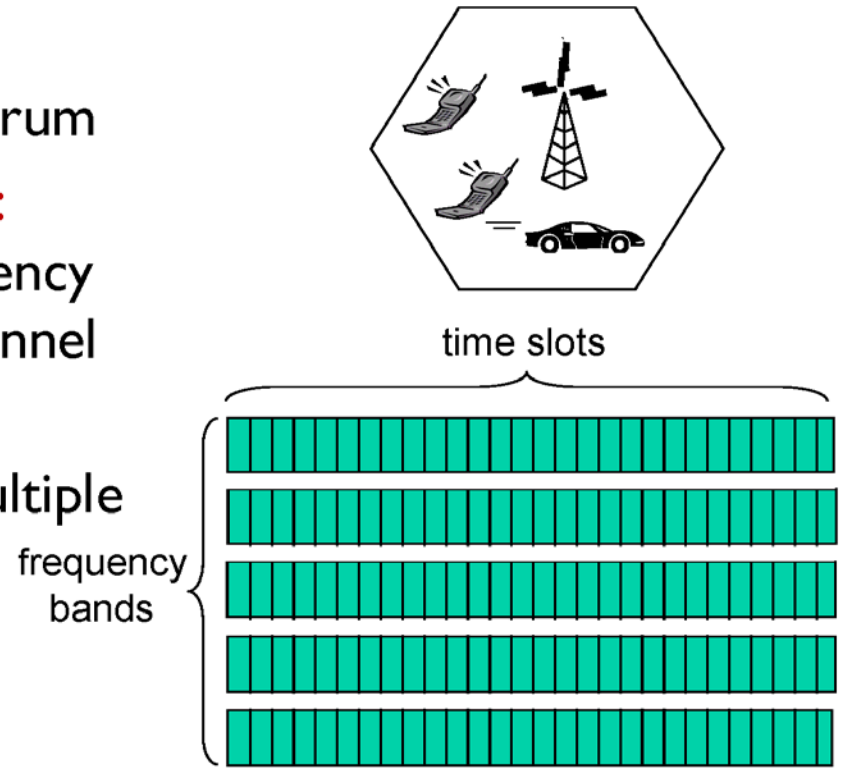

Multiple access techniques

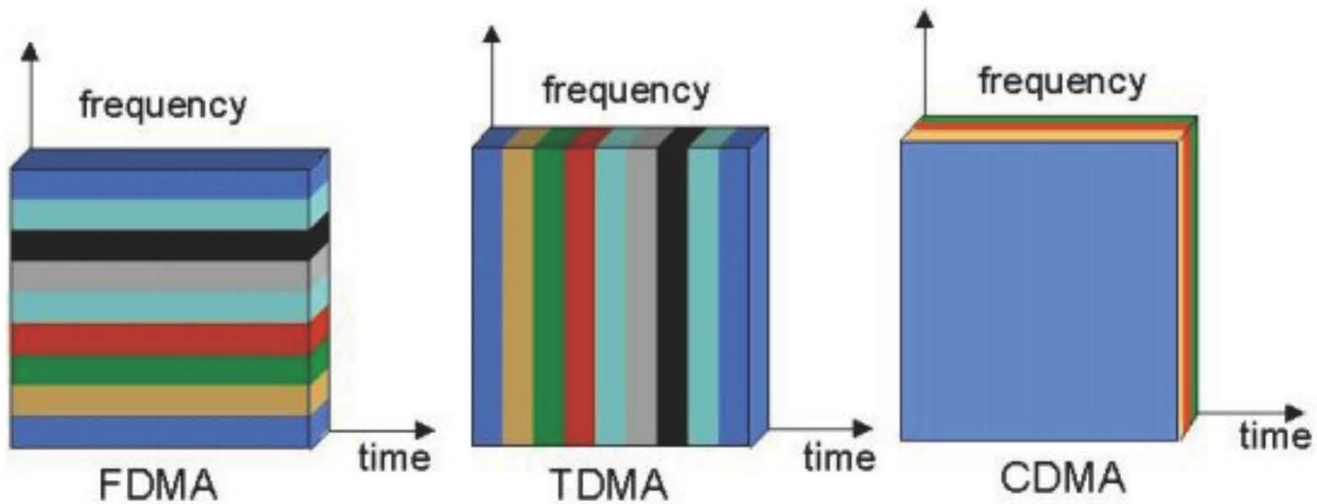

Cellular evolution

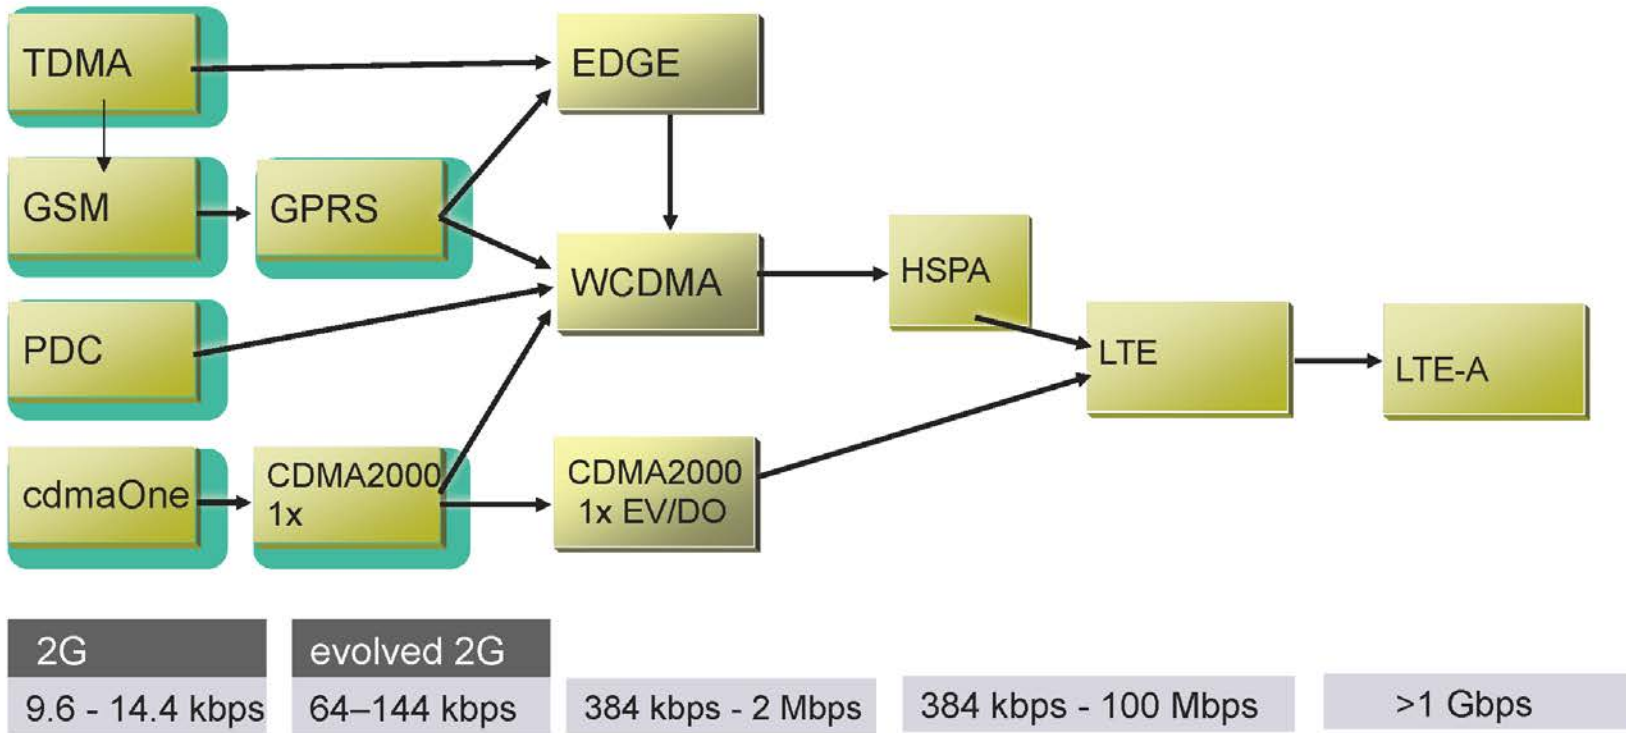

3G (voice+data) network architecture

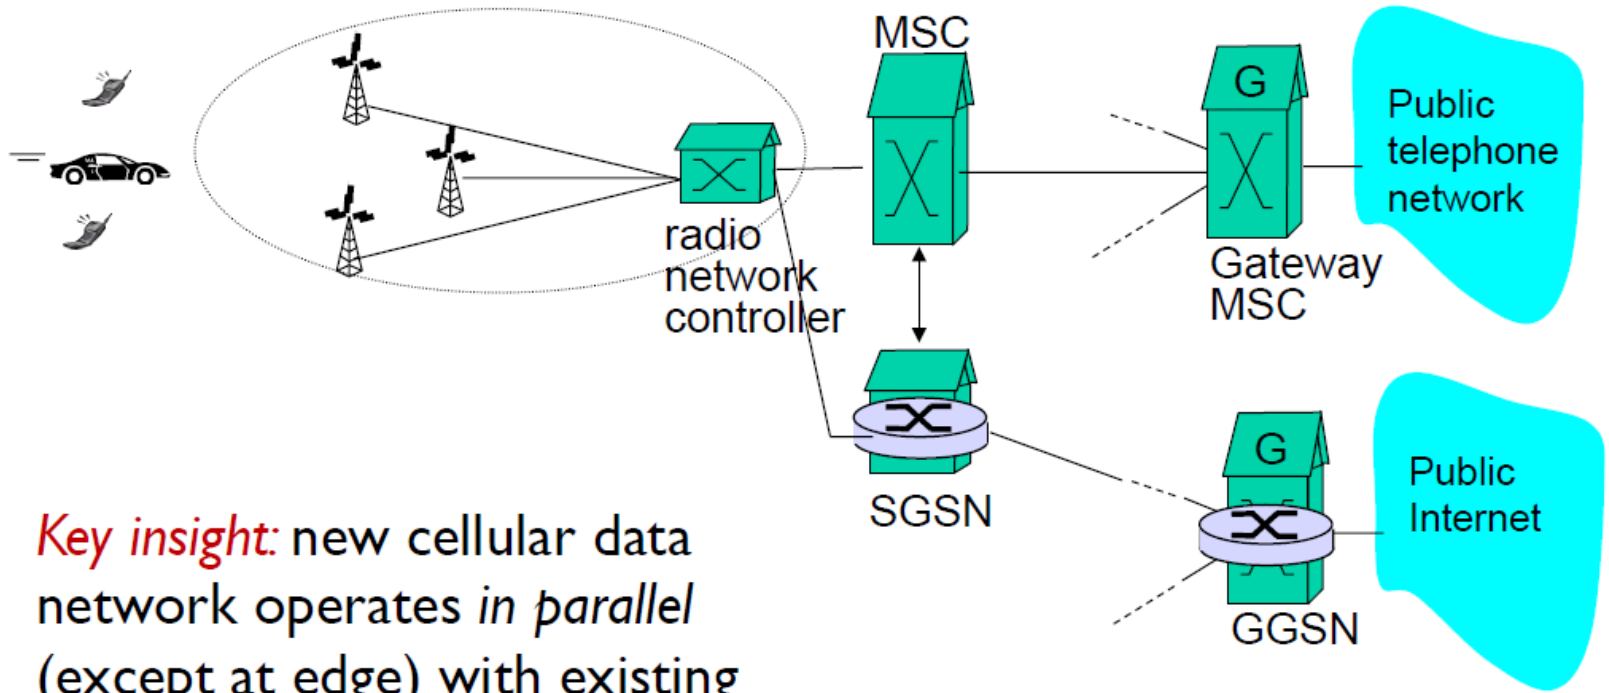

Key insight: new cellular data network operates *in parallel* (except at edge) with existing cellular voice network

- voice network unchanged in core
- data network operates in parallel

Serving GPRS Support Node (SGSN)


Gateway GPRS Support Node (GGSN)

Chapter 6 outline

6.1 Introduction

Wireless

6.2 Wireless links, characteristics
- CDMA

6.3 IEEE 802.11 wireless LANs ("Wi-Fi")

6.4 Cellular Internet Access
- architecture
- standards (e.g., GSM)

Mobility

6.5 Principles: addressing and routing to mobile users

6.6 Mobile IP

6.7 Handling mobility in cellular networks

6.8 Mobility and higher-layer protocols

6.9 Summary

What is mobility?

- spectrum of mobility, from the *network* perspective:

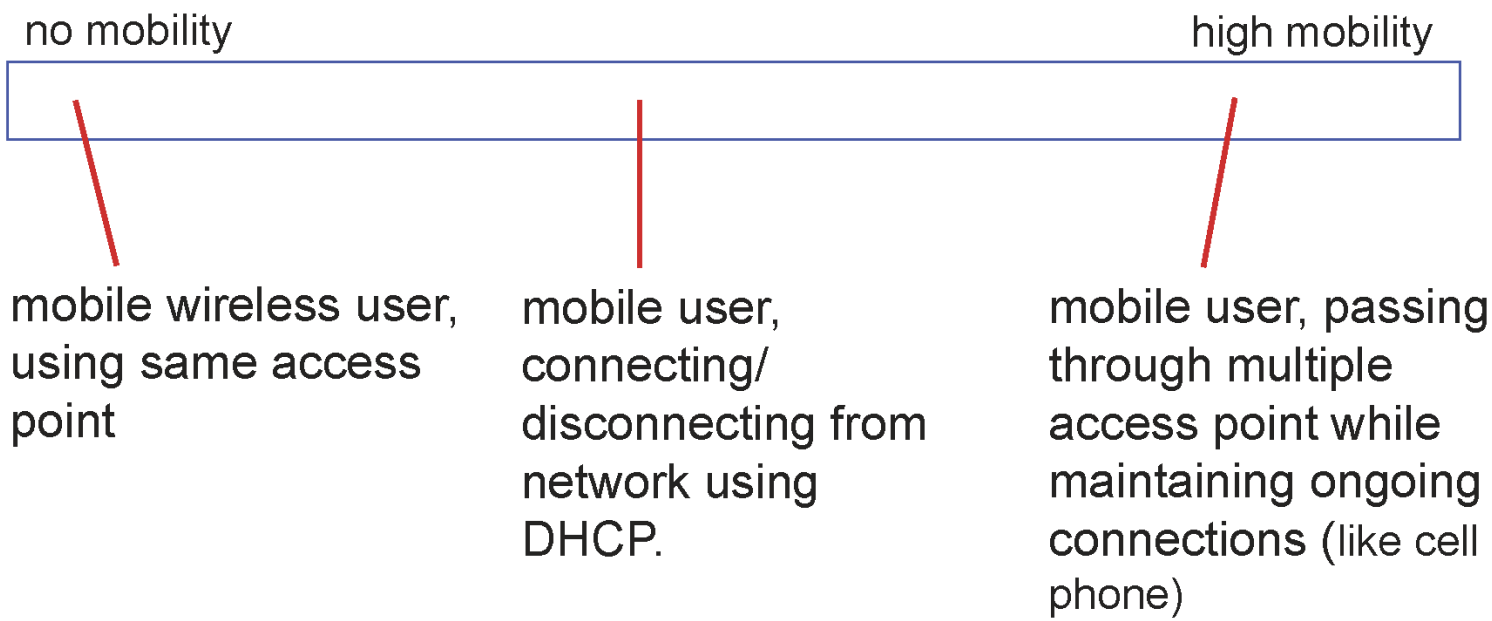

Mobility: vocabulary

home network: permanent "home" of mobile (e.g., 128.119.40/24)

home agent: *entity that will perform mobility functions on behalf of mobile, when mobile is remote*

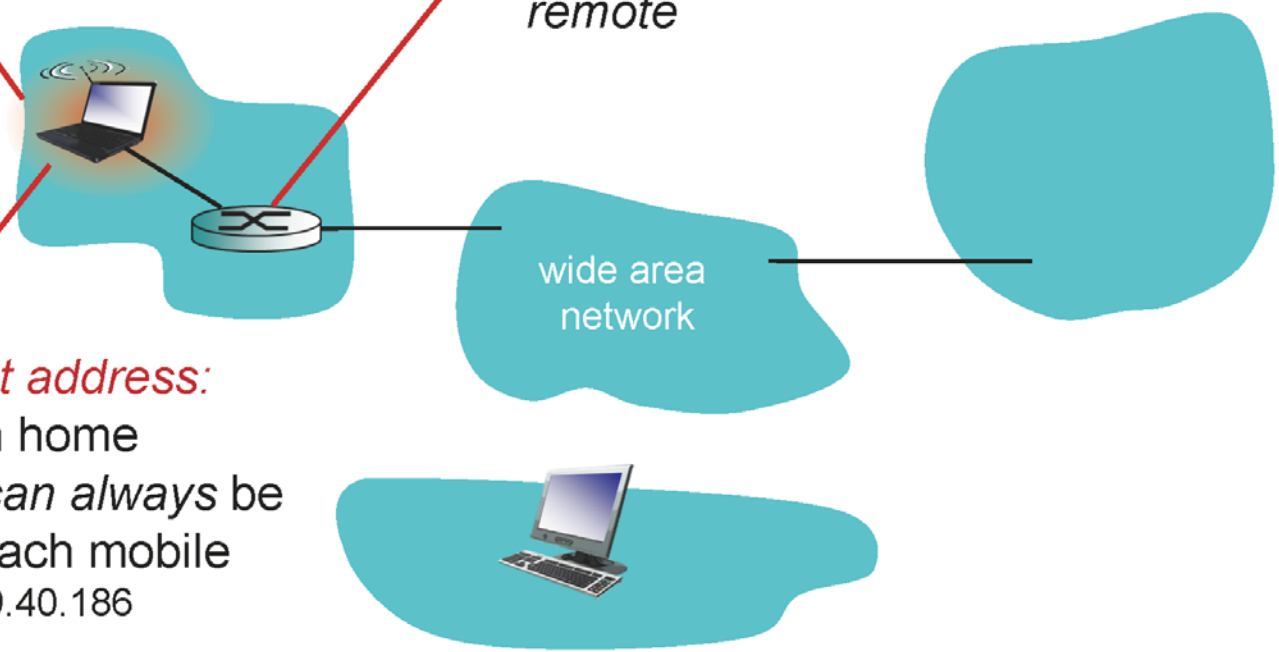

permanent address: address in home network, *can always* be used to reach mobile e.g., 128.119.40.186

Mobility: more vocabulary

permanent address: remains constant (e.g., 128.119.40.186)

visited network: network in which mobile currently resides (e.g., 79.129.13/24)

care-of-address: address in visited network. (e.g., 79,129.13.2)

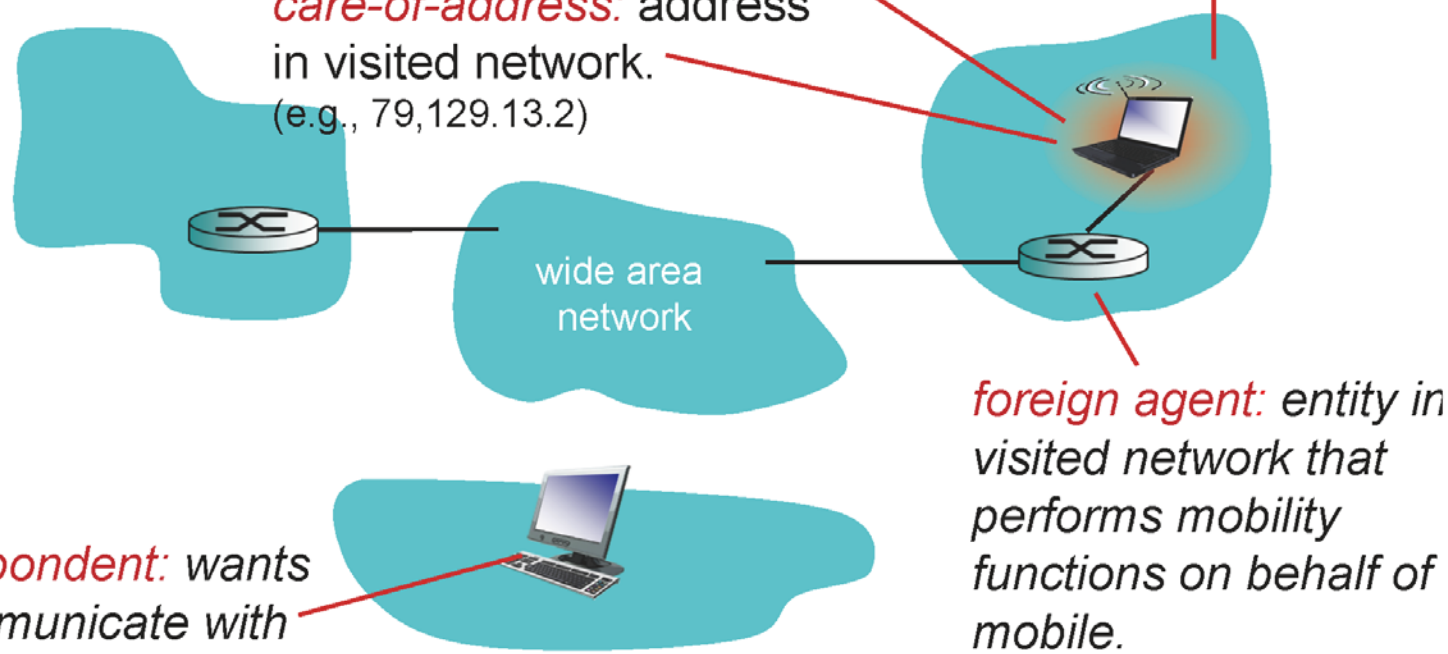

foreign agent: *entity in visited network that performs mobility functions on behalf of mobile.*

correspondent: *wants to communicate with mobile*