
HC26060 Kinetis dev module (KE02 / KE04, LQFP-44). Design reasons and test notes: docs/HC26060_design_notes.md


USB-C + POWER



ERC POWER FLAGS

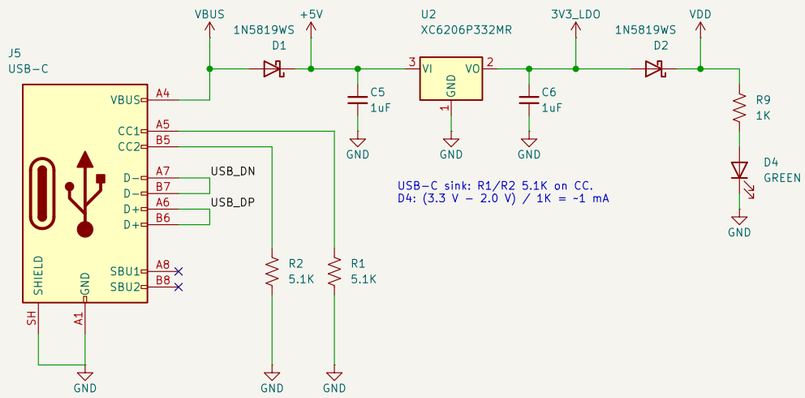


USER LED




active high (pin -> R7 -> LED)

MCU (KE02 or KE04, LQFP-44)

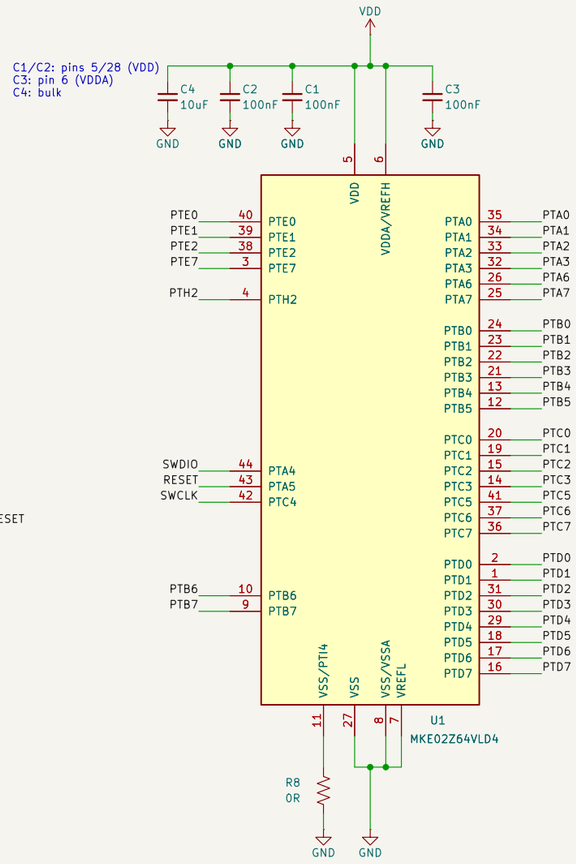


R8 (pin 11): KE02 = 0R fitted (VSS)
KE04 = DNP (PTI4)

BREADBOARD HEADERS (pin 1 = USB end)

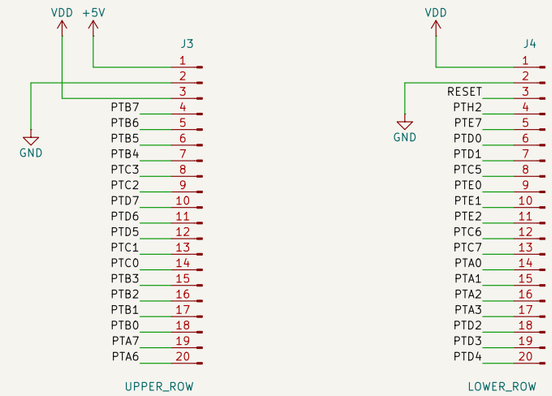


J3 = 5V/G/3V3 row, J4 = the other row.
SWDIO/SWCLK only on J1.


USB-SERIAL (CH340X on UART0)

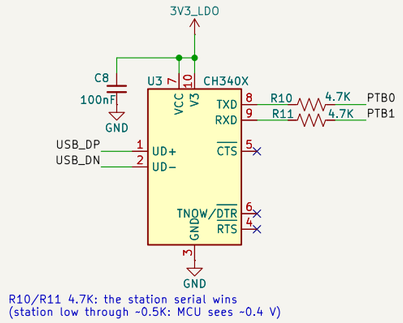

R10/R11 4.7K: the station serial wins
(station low through ~0.5K: MCU sees ~0.4 V)




SWD + RESET




J1 (Black Pill order):
1 3V3 2 SWDIO
3 SWCLK 4 GND

NMI PULL-UP



BUTTONS



SW2: internal pull-up on PTA0

Title: HC26060 Kinetis Test Target			**Hardcode**
File: HC26060.kicad_sch		Sheet 1 of 1	Size: A3
Date: 2026-10-08	Rev: A	Draw by: Mauricio Mendes	