BANCO
WATER TANK

FIBER REINFORCED POLYMER (FRP)

PANEL TYPE WATER TANK

"Designed for safety ... built to last"

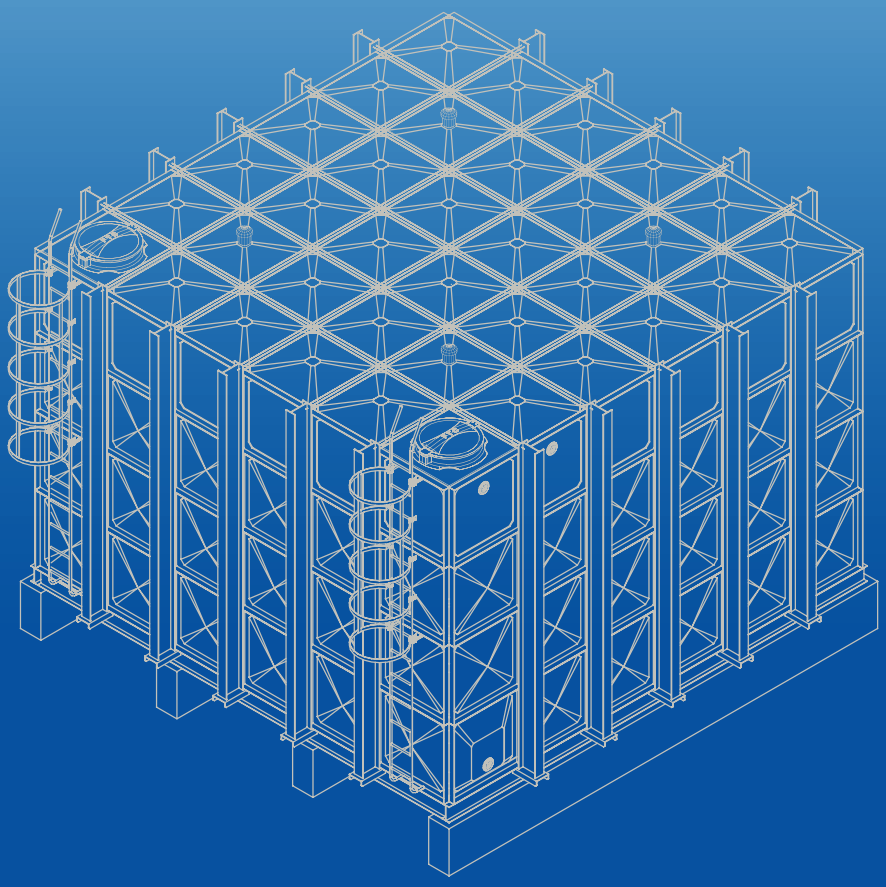

A quality product by Neomech (T) Ltd.

BANCO WATER TANK

TABLE OF CONTENTS

WHO WE ARE 3

SAFE WATER STORAGE SYSTEM 4

STANDARD PANEL DESIGN 5

TECHNICAL SPECIFICATIONS 6

FEATURES 7

FRP TANK ADVANTAGES 8

BENEFITS OF FRP TANKS 10

APPLICATIONS 11

WHO WE ARE

Established in 1965, BANCO pioneered the foam mattress industry in Tanzania, quickly becoming a trusted name in comfortable sleep solutions.

With three state-of-the-art manufacturing plants strategically located in Dar es Salaam, Mwanza, and Mbeya, the company produces high-quality products to serve customers nationwide through its network of 10 branches across the country.

Expanding its portfolio, BANCO has ventured into plastics manufacturing, specializing in shrink film, jerry cans, and buckets—delivering durable, innovative solutions for everyday needs.

FRP Water Tank is the latest innovation launched by BANCO, proudly made in Tanzania.

SAFE WATER STORAGE SYSTEM

"Managing the world's water supply"

It is an obvious fact, which nonetheless deserves emphasizing, that water is fundamental to our daily lives. Whether for drinking, cooking, washing or cleaning, as well as industrial and commercial requirements. As demand grows year by year, the management and conservation of supplies becomes ever more critical, the highest standards of purity of the delivered product are insisted upon.

The FRP Panel Type Water Tanks storage system has been designed and developed for the single purpose of meeting these demands, with utmost efficiency and flexibility, with uncompromising levels of quality and reliability. Specified to meet the most rigorous conditions, it has become the system of choice around the world for applications from individual homes to major building and industrial complexes.

The FRP Panel Type Water Tanks system is supremely flexible and provide free-standing long term storage capacity. Our water tanks conserve water to the highest quality standards, serving the needs of private residences, accommodation complexes, hospitals, hotels and offices, as well as industrial, municipal and irrigation projects where large-scale water storage is required. Every unit is supplied to the same standard of design and specification, to the size and shape best suited to every need of the customer. Assembly and installation is straight forward, and can be easily carried out by the user or contractor.

STANDARD PANEL DESIGN

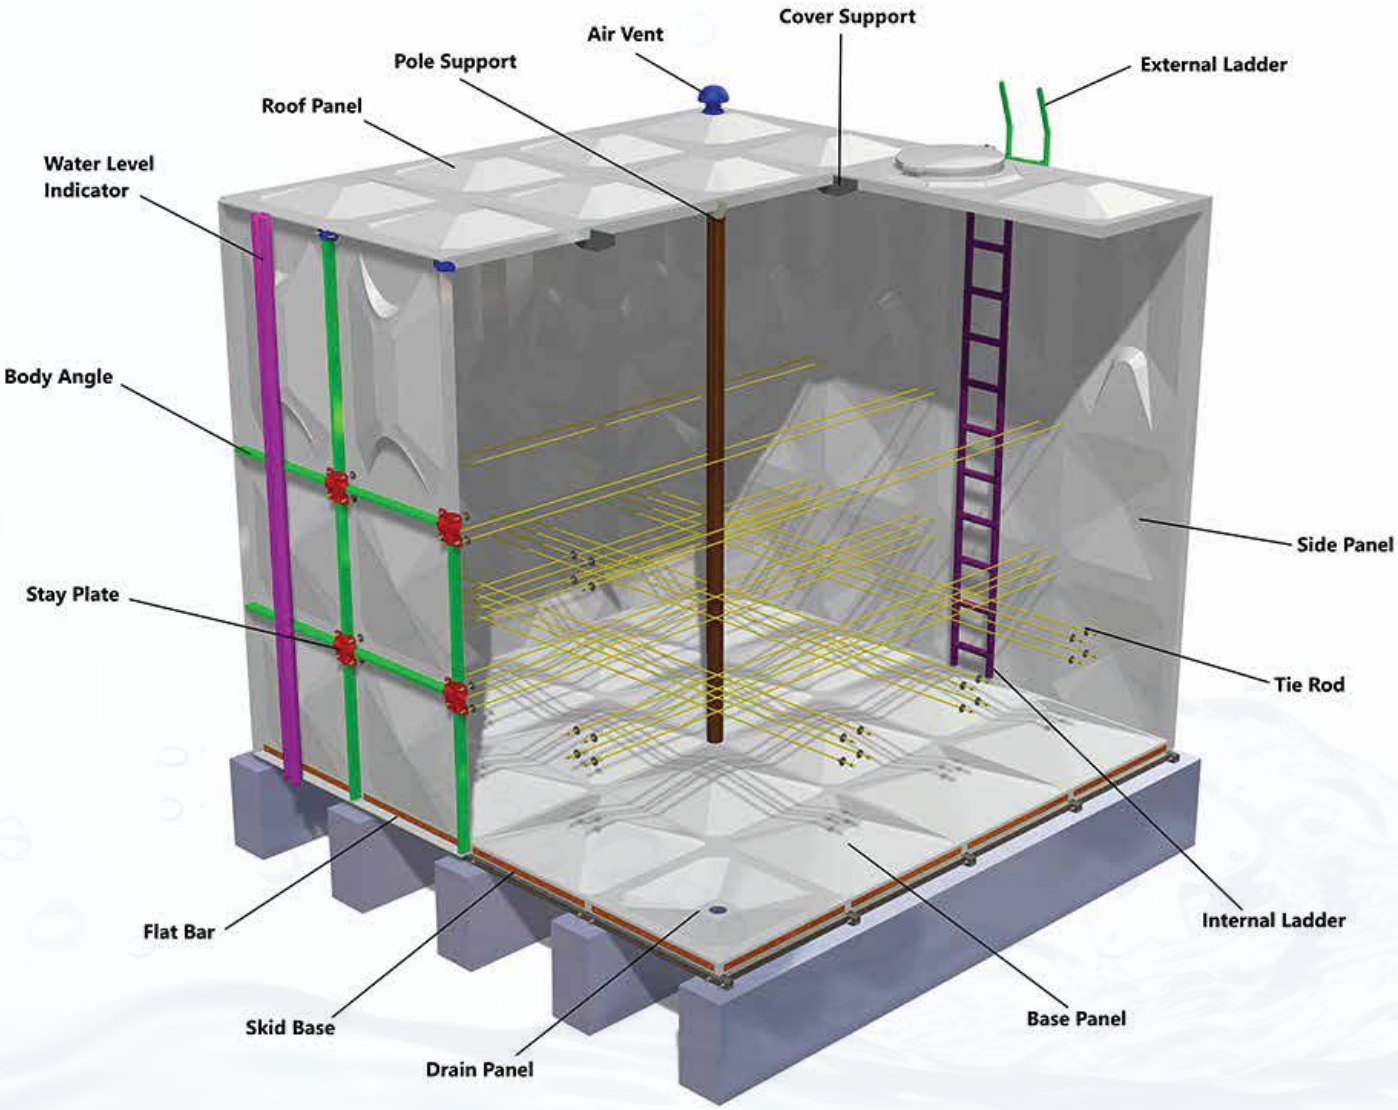

BANCO WATER TANK

TECHNICAL SPECIFICATIONS

DESCRIPTION	VALUES
Hydrostatic Pressure	Water level (m) x 0.01MPa
Wind pressure	1060 N/m2
Ambient temperature	55 degrees C (max)
Water temperature	65 degrees C (max)
Water quality	pH: 5.8 to 8.6
Roof load	110 Kgf/ m2
Tensile strength	110 MPa
Tensile elastic modulus	12.9 GPa
Compressive strength	155 MPa
Shear strength	97 MPa
Flexural strength	140 MPa
Specific gravity	1.80
Barcol hardness	65
Light transmission	Nil
Water absorption	Less than 0.1%
Thermal conductivity	0.1 w/mK

FEATURES

ASSEMBLY DETAILS

Tanks are modular sectional systems, assembled on-site using bolts, nuts, washers, sealing gaskets, and steel stiffeners.

Premium quality stainless steel (SS304/316) or galvanized steel is used for interior bracing.

Sealing system- special gaskets are used between panels to avoid any possible leakages over a long-term period.

Basic tools and equipment are required for fast and easy on-site assembly and installation.

ACCESSORIES

- Roof Panel: Standard size 1000 x1000 mm
- Side Panel: Standard size 1000 x1000 mm
- Bottom Panel: Standard size 1000 x1000 mm
- Manhole Cover: Standard size 1000 x1000 mm
- Steel Angle & C-channel, nut, bolt & washer (HDG)
- Ladders: Inside/outside galvanized or stainless steel.
- Flanges: HDG or SS304/316.
- Level indicators: included in the system.
- Overflow and drain nozzles: included in the system.

FRP TANK ADVANTAGES

"Pure, clean water. Always

Pure, clean water at all times and for all purposes – drinking, domestic or industrial – is what the FRP Panel Type Water Tank is designed to deliver. The specifications and exclusive design features of the system protect against any occurrence of static water, growth of algae, contamination from corrosion or bacteria, or accumulation of externally introduced material.

NO ALGAE GROWTH

The growth of algae and other micro-organisms is closely related to light. To prevent this requires light transmission of less than 0.1% in direct sunlight.

All standard FRP Panel Type Water Tanks molded panels have a light transmission of less than 0.005%, to prevent algae growth even if the tank is installed in full sunlight. Growth of algae, if allowed to occur, will adversely affect water taste, and can lead to disease such as gastroenteritis.

NO BACTERIAL GROWTH

All FRP Panel Type Water Tanks are hot press molded with perfectly smooth finish, eliminating the problem at the source. Conventional tanks allow stored water to be in contact with rough surfaces, this creates a breeding ground for bacterial growth.

MINIMAL CLEANING REQUIREMENT

The smooth interior surfaces, and free-draining design of FRP Panel Type Water Tanks minimizes any opportunity for pollutants, whether originating internally or externally to develop and accumulate. Routine cleaning requirements are consequently simple and infrequent, with no risk of leaving residual material or cleaning agents inside the tank.

"Pure, clean water.
Always

COMPLETE DRAINAGE

The base of the FRP Panel Type Water Tank is constructed with convex bottom panels. This not only provides a positive sealing pressure, which increases as the water height increases, but also enables a free flow of water from all parts of the tank to the concave drainage panel.

Complete and fast drainage from the lowest point is thus ensured, with no possibility for static water to accumulate and become stale or contaminated.

FLEXURAL STRENGTH

FRP Panel Type Water Tanks have excellent flexural strength, also known as modulus of rupture, bend strength, or fracture strength, is defined as a material's ability to resist deformation under load.

BENEFITS OF FRP TANKS

EXCELLENT HYGIENE

High resistance to bacteria growth and algae formation

PURE WATER QUALITY

Engineered design ensures complete manhole sealing to prevent any contamination from dust or insects.

DESIGN FLEXIBILITY

High flexibility- tank shape and capacity can be fully customised depending on the location

PORTABILITY

Innovative design allows even large capacity tanks to be transported safely

RELOCATION

Designed for easy disassembly, portability, relocation and re-installation at new location

LEAKAGE RESISTANCE

Unique design can handle high water pressure and has high resistance to leakages

DRAINAGE

Unique design allows 100% drainage

STRENGTH AND DURABILITY

Excellent compression, tension, strength allows for high durability

INTERNAL TANK PARTITION

Fully customisable and changeable partitions are possible depending on application.

REPAIRING

In case of accidental damage, specific panels can be replaced using basic tools

UV RESISTANCE

Highly resistant

MAINTENANCE

Not required

APPLICATIONS:

- Industrial Segments - Water storage for FMCG, Fisheries, Pharmaceuticals, Cosmetics, Paints, Breweries, Textiles and others
- Industrial process water and demineralised water industries and utility organisations
- Water supply network for rural and urban areas
- Small to large scale housing complexes
- Construction Industries -Temporary or for permanent water storage facilities
- Storage of treated water and distilled mineral water
- Multi purpose fire fighting operations
- Community water supply / Public water storage
- Hospitals, Schools and Universities
- Railway stations, Bus stations and Airports
- Water storage solutions for safari game parks, resorts and hotels
- Water storage solutions for remote areas, coastal, central and hilly terrains
- Multistoried residential & commercial buildings
- Shopping complex
- Water Storage in extreme temperatures
- Defence establishments- MES, ordinance factory, etc.
- Restaurants
- Other public utilities

BANCO
WATER TANK

CONTACT US

Neomech (T) Ltd.
46/3 Nyerere Road, Dar Es Salaam, Tanzania
Mr Dipesh Joshi
+255 799 056 641
sales@neomech.co.tz