


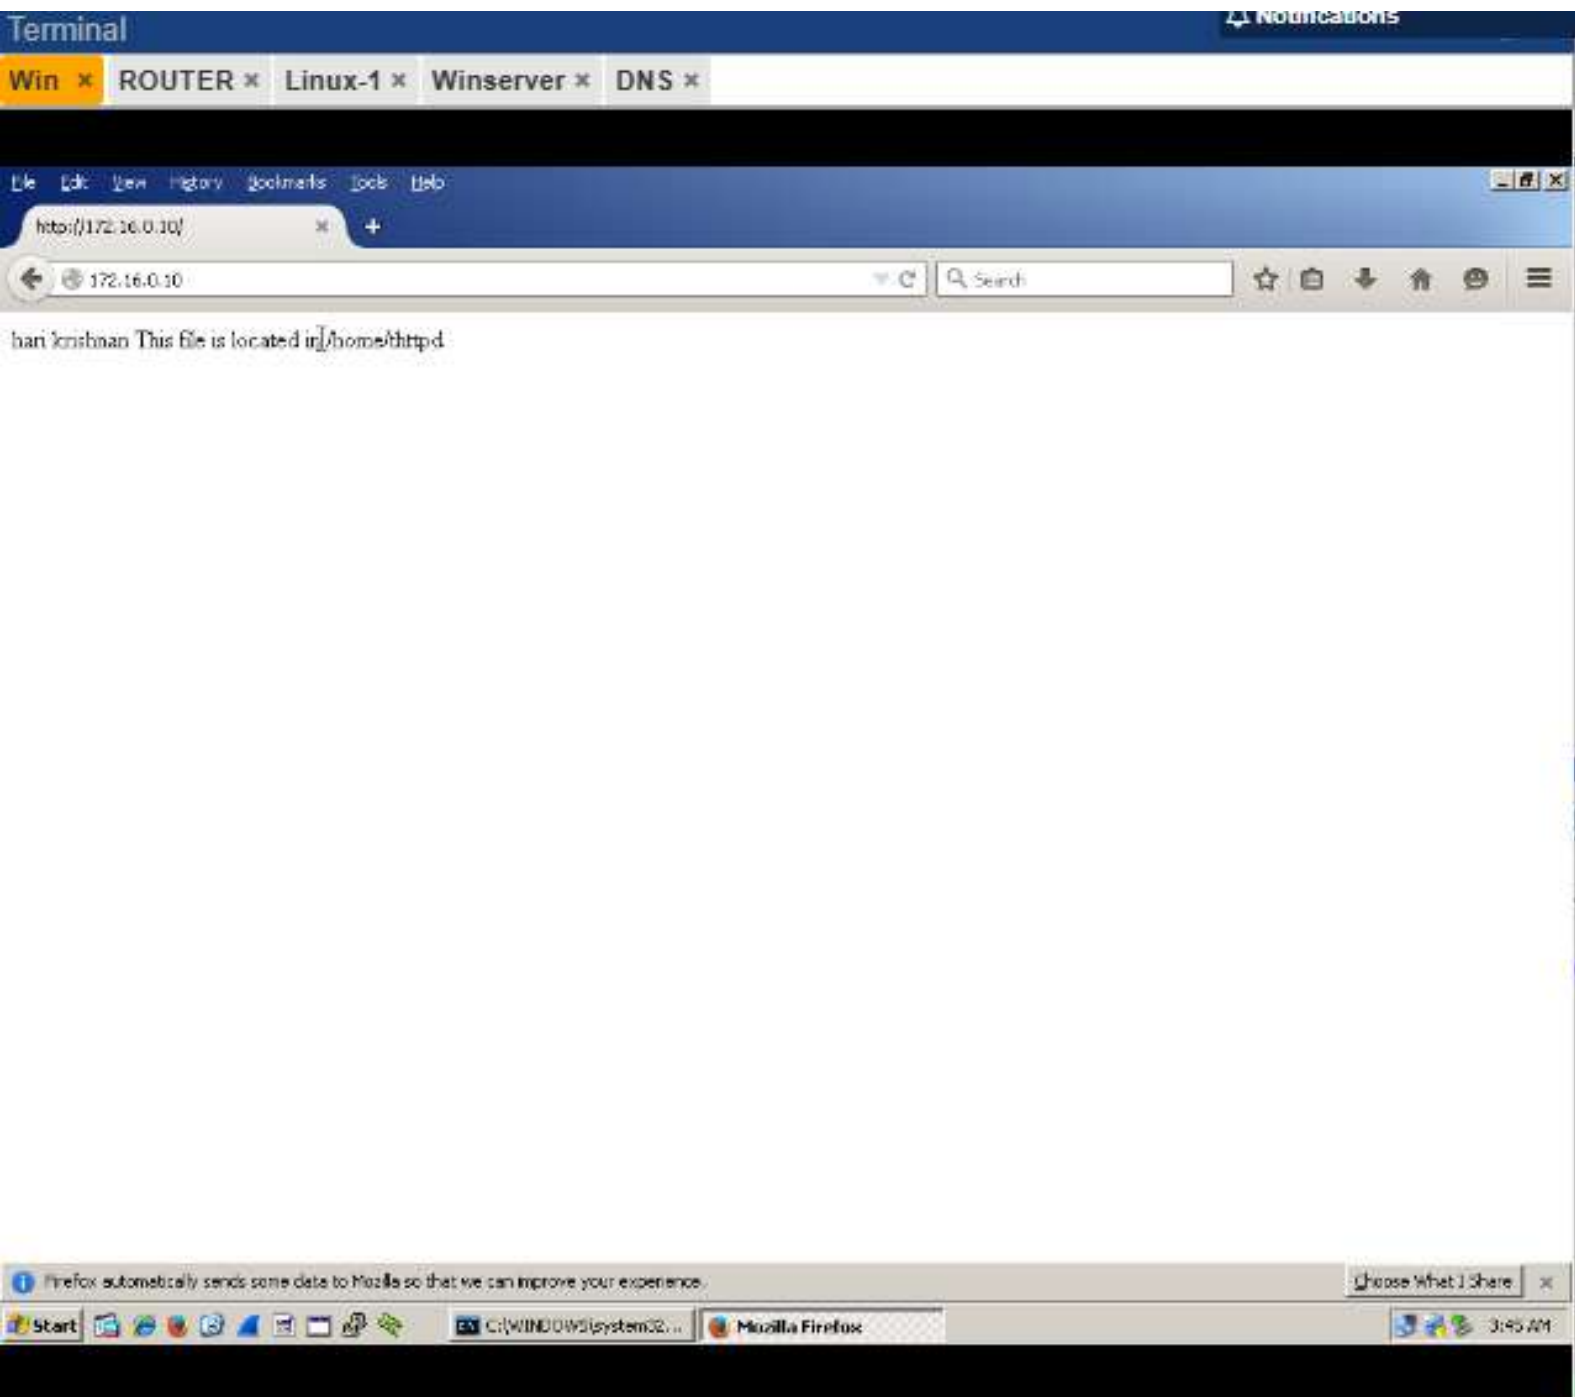

Terminal

Win * ROUTER * Linux-1 * Winserver * DNS *

File Edit View History Bookmarks Tools Help

ITS Windows Server

172.16.0.20

Search

Windows Server

Internet Information Services

Welcome Bienvenue Tervetuloa

ようこそ Benvenuto 歡迎

Bem-vindo

Bienvenido Hoş geldiniz ברוכים הבאים Welkom

Vítejte Καλώς ορίσαστε Välkommen 환영합니다 Добро пожаловать Üdvözlünk

Microsoft

Willkommen Velkommen

مرحبا 欢迎 Wilamy

go.microsoft.com/fwlink/?linkid=66136&id=0&409

Firefox automatically sends some data to Mozilla so that we can improve your experience. Choose What I Share

Start

C:\WINDOWS\system32...

ITS Windows Server - ...

3:45 AM

han.krishnan This file is located in /home/httpd

Windows Server

Internet Information Services

Welcome

Bienvenue

Tervetuloa

ようこそ Benvenuto 歡迎

Bem-vindo

Bienvenido

Hoş geldiniz

ברוכים הבאים

Welkom

Vítejte
Καλώς
ορίσαστε

Välkommen

환영합니다

Добро
пожаловать


Üdvözljük


Microsoft


Willkommen

Velkommen

Witamy

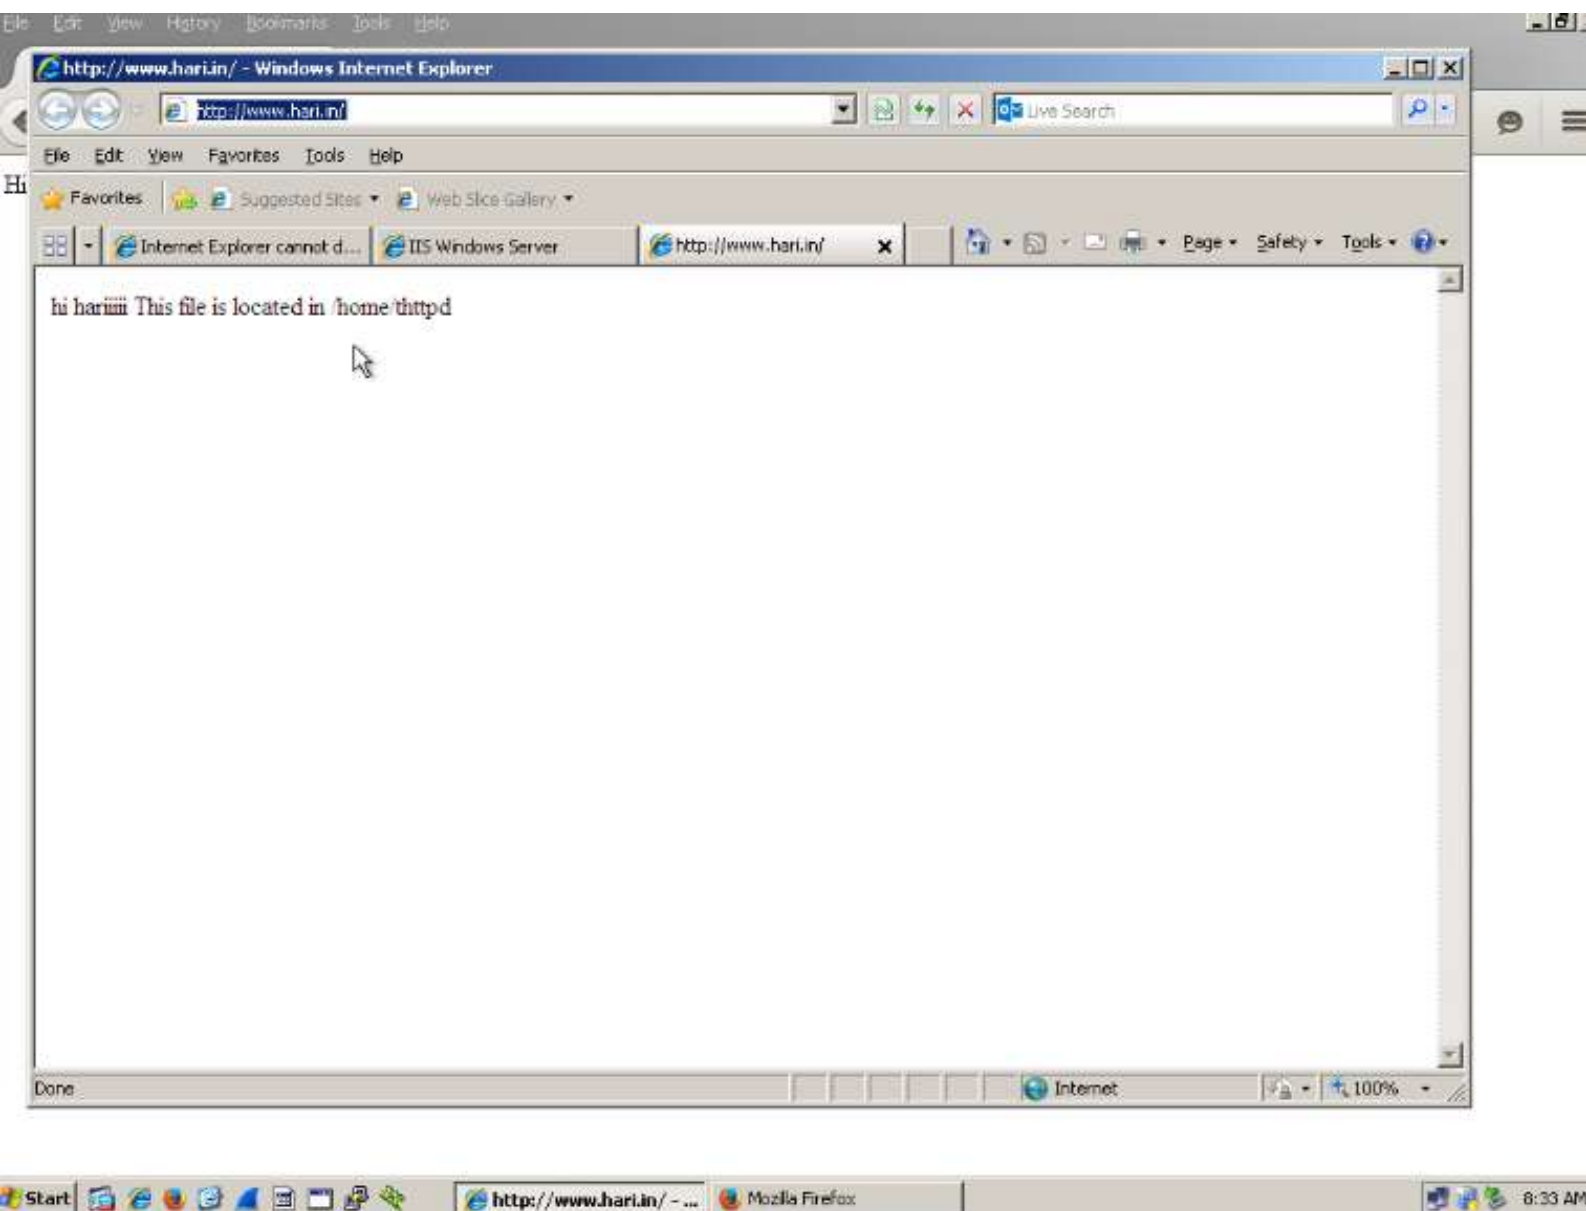

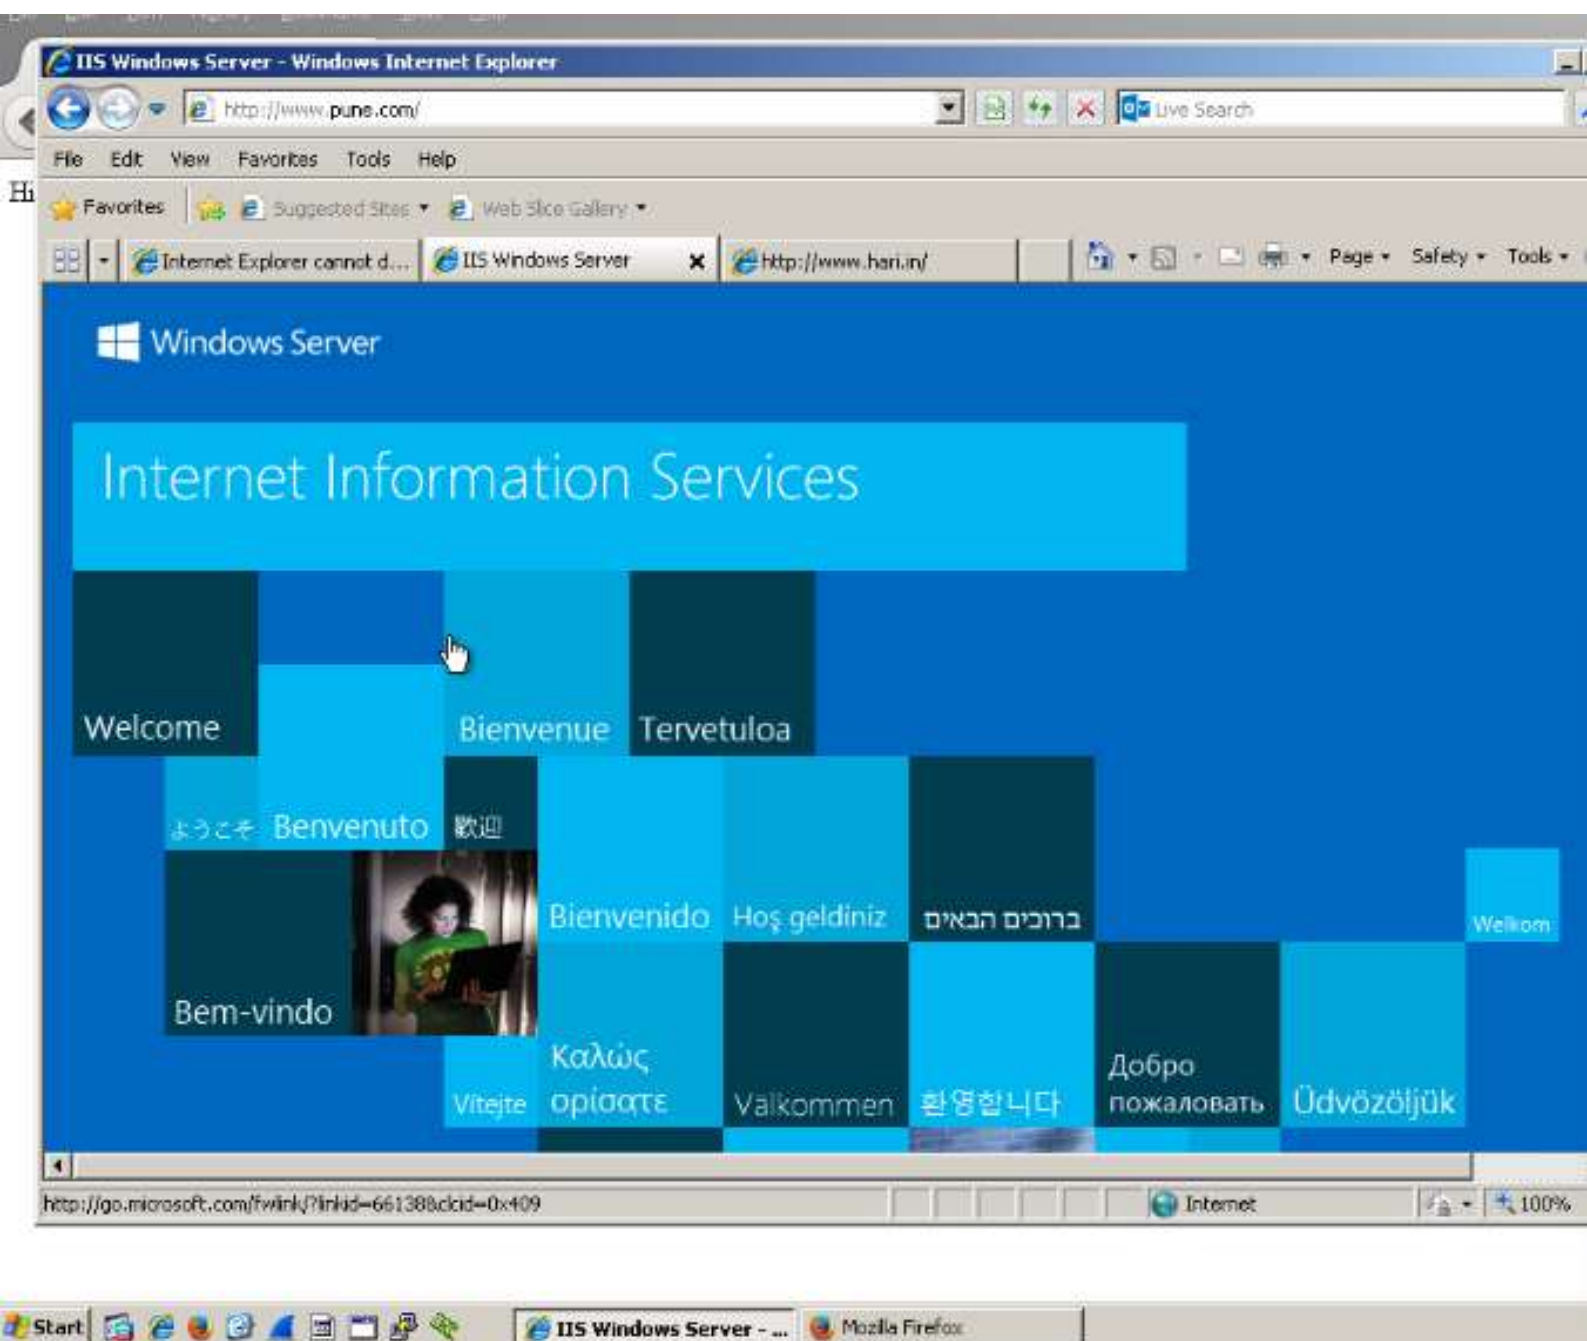

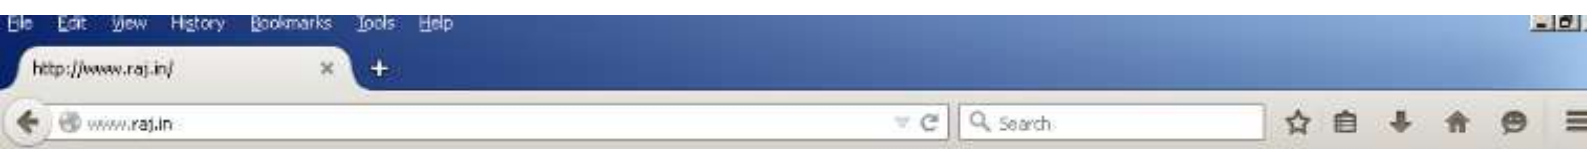

Hi rajjjj kumar loves girls and girls love raj This file is located in /home/httpd

DNS Manager

FileActionViewHelp

DNS

SERVER2016

Forward Lookup Zones

com

pune

in

hari

raj

Reverse Lookup Zones

Trust Points

Conditional Forwarders

Name	Type	Data	Timestamp
www	Host (A)	200.10.156.10	

C:\Windows\system32\cmd.exe

Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\Admin>ipconfig

Windows IP Configuration

Ethernet adapter Ethernet:

Connection-specific DNS Suffix . :
Link-local IPv6 Address : fe80::e10f:8d93:c74f:4bf9%3
IPv4 Address. : 182.46.0.10
Subnet Mask : 255.255.0.0
Default Gateway : 182.46.0.1

Tunnel adapter isatap.{2523F545-554E-448A-9326-6841492410C5}:

Media State : Media disconnected
Connection-specific DNS Suffix . :

C:\Users\Admin>

```

R1#
R1#
R1#
R1#
R1#sh ip int br

```

Interface	IP-Address	OK?	Method	Status	Protocol
Ethernet0/0	10.0.0.1	YES	manual	up	up
Ethernet0/1	1.0.0.1	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	up	up
Ethernet0/3	unassigned	YES	TFTP	up	up

```

R1#sh ip rout
R1#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

```

Gateway of last resort is 1.0.0.2 to network 0.0.0.0

```

S* 0.0.0.0/0 [1/0] via 1.0.0.2
1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C   1.0.0.0/8 is directly connected, Ethernet0/1
L   1.0.0.1/32 is directly connected, Ethernet0/1
S   2.0.0.0/8 [1/0] via 1.0.0.2
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C   10.0.0.0/8 is directly connected, Ethernet0/0
L   10.0.0.1/32 is directly connected, Ethernet0/0

```

```

R1#

```

```

R2#
R2#
R2#
R2#sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
Ethernet0/0    200.10.156.1    YES manual up          up
Ethernet0/1    2.0.0.1         YES manual up          up
Ethernet0/2    1.0.0.2         YES manual up          up
Ethernet0/3    6.0.0.1         YES manual up          up

```

```

R2#sh ip rou
R2#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - OOR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

```

Gateway of last resort is not set

```

1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    1.0.0.0/8 is directly connected, Ethernet0/2
L    1.0.0.2/32 is directly connected, Ethernet0/2
2.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    2.0.0.0/8 is directly connected, Ethernet0/1
L    2.0.0.1/32 is directly connected, Ethernet0/1
S    3.0.0.0/8 [1/0] via 2.0.0.2
S    4.0.0.0/8 [1/0] via 2.0.0.2
S    5.0.0.0/8 [1/0] via 2.0.0.2
6.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    6.0.0.0/8 is directly connected, Ethernet0/3
L    6.0.0.1/32 is directly connected, Ethernet0/3
S    10.0.0.0/8 [1/0] via 1.0.0.1
S    135.82.0.0/16 [1/0] via 2.0.0.2
S    153.69.0.0/16 [1/0] via 6.0.0.2
S    182.46.0.0/16 [1/0] via 2.0.0.2
200.10.156.0/24 is variably subnetted, 2 subnets, 2 masks
C    200.10.156.0/24 is directly connected, Ethernet0/0
L    200.10.156.1/32 is directly connected, Ethernet0/0

```

```

R3#
R3#
R3#sh ip int br

```

Interface	IP-Address	OK?	Method	Status	Protocol
Ethernet0/0	2.0.0.2	YES	manual	up	up
Ethernet0/1	3.0.0.1	YES	manual	up	up
Ethernet0/2	4.0.0.1	YES	manual	up	up
Ethernet0/3	unassigned	YES	TFTP	up	up

```

R3#sh ip ro
R3#sh ip route

```

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
 D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
 N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
 E1 - OSPF external type 1, E2 - OSPF external type 2
 i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
 ia - IS-IS inter area, * - candidate default, U - per-user static route
 o - OOR, P - periodic downloaded static route, H - NHRP, l - LISP
 a - application route
 + - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

```

S   1.0.0.0/8 [1/0] via 2.0.0.1
    2.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C   2.0.0.0/8 is directly connected, Ethernet0/0
L   2.0.0.2/32 is directly connected, Ethernet0/0
    3.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C   3.0.0.0/8 is directly connected, Ethernet0/1
L   3.0.0.1/32 is directly connected, Ethernet0/1
    4.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C   4.0.0.0/8 is directly connected, Ethernet0/2
L   4.0.0.1/32 is directly connected, Ethernet0/2
S   5.0.0.0/8 [1/0] via 4.0.0.2
S   6.0.0.0/8 [1/0] via 2.0.0.1
S   10.0.0.0/8 [1/0] via 2.0.0.1
S   135.82.0.0/16 [1/0] via 4.0.0.2
S   153.69.0.0/16 [1/0] via 2.0.0.1
S   182.46.0.0/16 [1/0] via 3.0.0.2
S   200.10.156.0/24 [1/0] via 2.0.0.1

```

```

R3#
R3#

```

```

R4#
R4#
R4#
R4#
R4#sh ip int br
Interface                IP-Address      OK? Method Status        Protocol
Ethernet0/0              182.46.0.1      YES manual up            up
Ethernet0/1              3.0.0.2         YES manual up            up
Ethernet0/2              unassigned      YES TFTP  up            up
Ethernet0/3              unassigned      YES TFTP  up            up

```

```

R4#sh ip ro
R4#sh ip route

```

```

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

```

```

Gateway of last resort is 3.0.0.1 to network 0.0.0.0

```

```

S*   0.0.0.0/0 [1/0] via 3.0.0.1
      3.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     3.0.0.0/8 is directly connected, Ethernet0/1
L     3.0.0.2/32 is directly connected, Ethernet0/1
      182.46.0.0/16 is variably subnetted, 2 subnets, 2 masks
C     182.46.0.0/16 is directly connected, Ethernet0/0
L     182.46.0.1/32 is directly connected, Ethernet0/0

```

```

R4#
R4#

```

R5#

R5#

R5#

R5#sh ip int br

Interface	IP-Address	OK?	Method	Status	Protocol
Ethernet0/0	5.0.0.1	YES	manual	up	up
Ethernet0/1	4.0.0.2	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	up	up
Ethernet0/3	unassigned	YES	TFTP	up	up

R5#sh ip ro

R5#sh ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area

N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2

E1 - OSPF external type 1, E2 - OSPF external type 2

i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2

ia - IS-IS inter area, * - candidate default, U - per-user static route

o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP

a - application route

+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

S 1.0.0.0/8 [1/0] via 4.0.0.1

S 2.0.0.0/8 [1/0] via 4.0.0.1

S 3.0.0.0/8 [1/0] via 4.0.0.1

4.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 4.0.0.0/8 is directly connected, Ethernet0/1

L 4.0.0.2/32 is directly connected, Ethernet0/1

5.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 5.0.0.0/8 is directly connected, Ethernet0/0

L 5.0.0.1/32 is directly connected, Ethernet0/0

S 6.0.0.0/8 [1/0] via 4.0.0.1

--More--