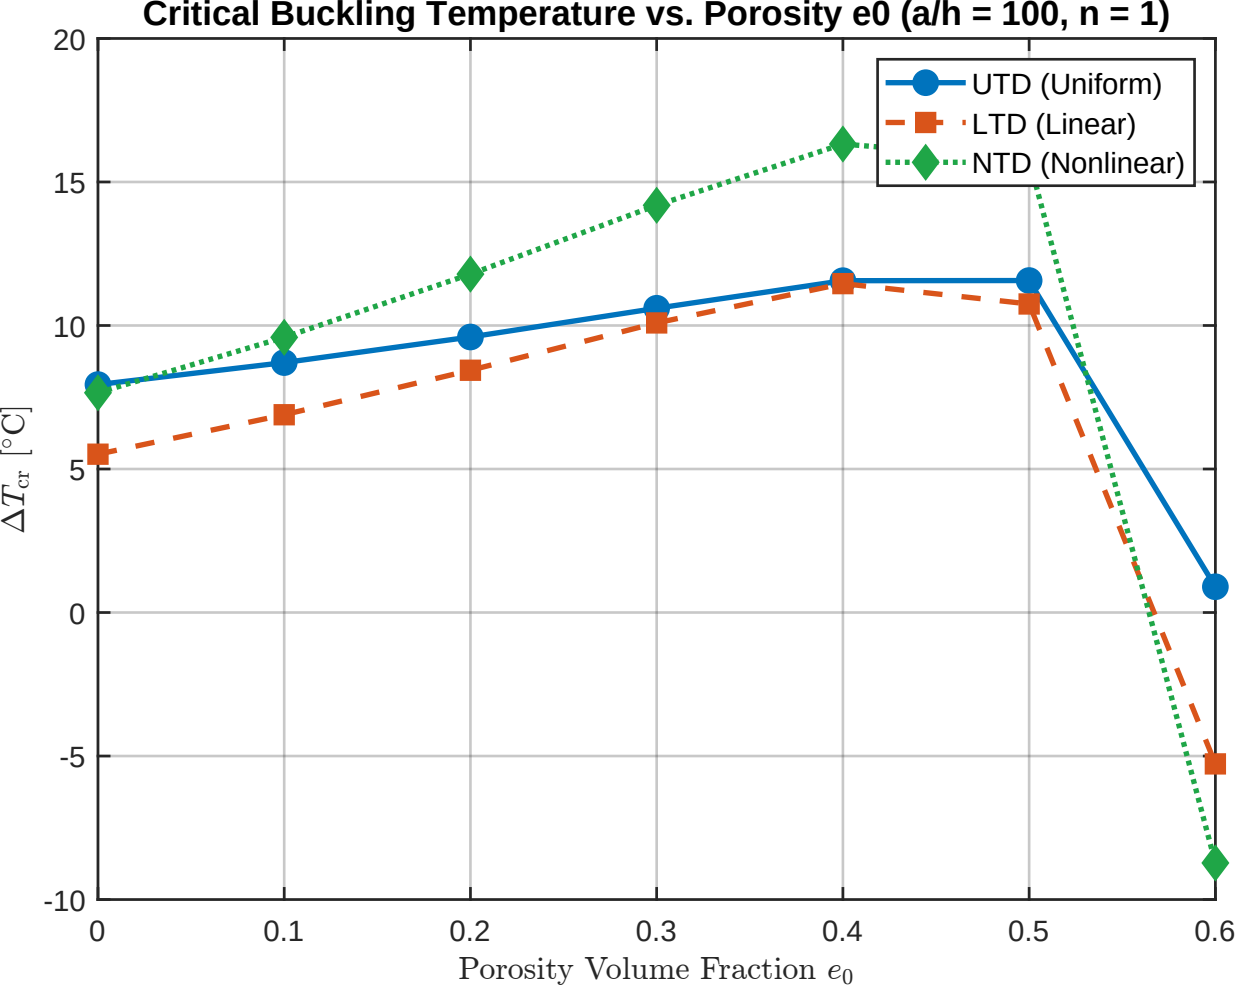
Critical Buckling Temperature vs. Porosity e0 (a/h = 100, n = 1)
UTD (Uniform)
LTD (Linear)
NTD (Nonlinear)
20
15
10
5
0
-5
-10
0
0.1
0.2
0.3
0.4
0.5
0.6
ΔT_{cr} [°C]
Porosity Volume Fraction e_0