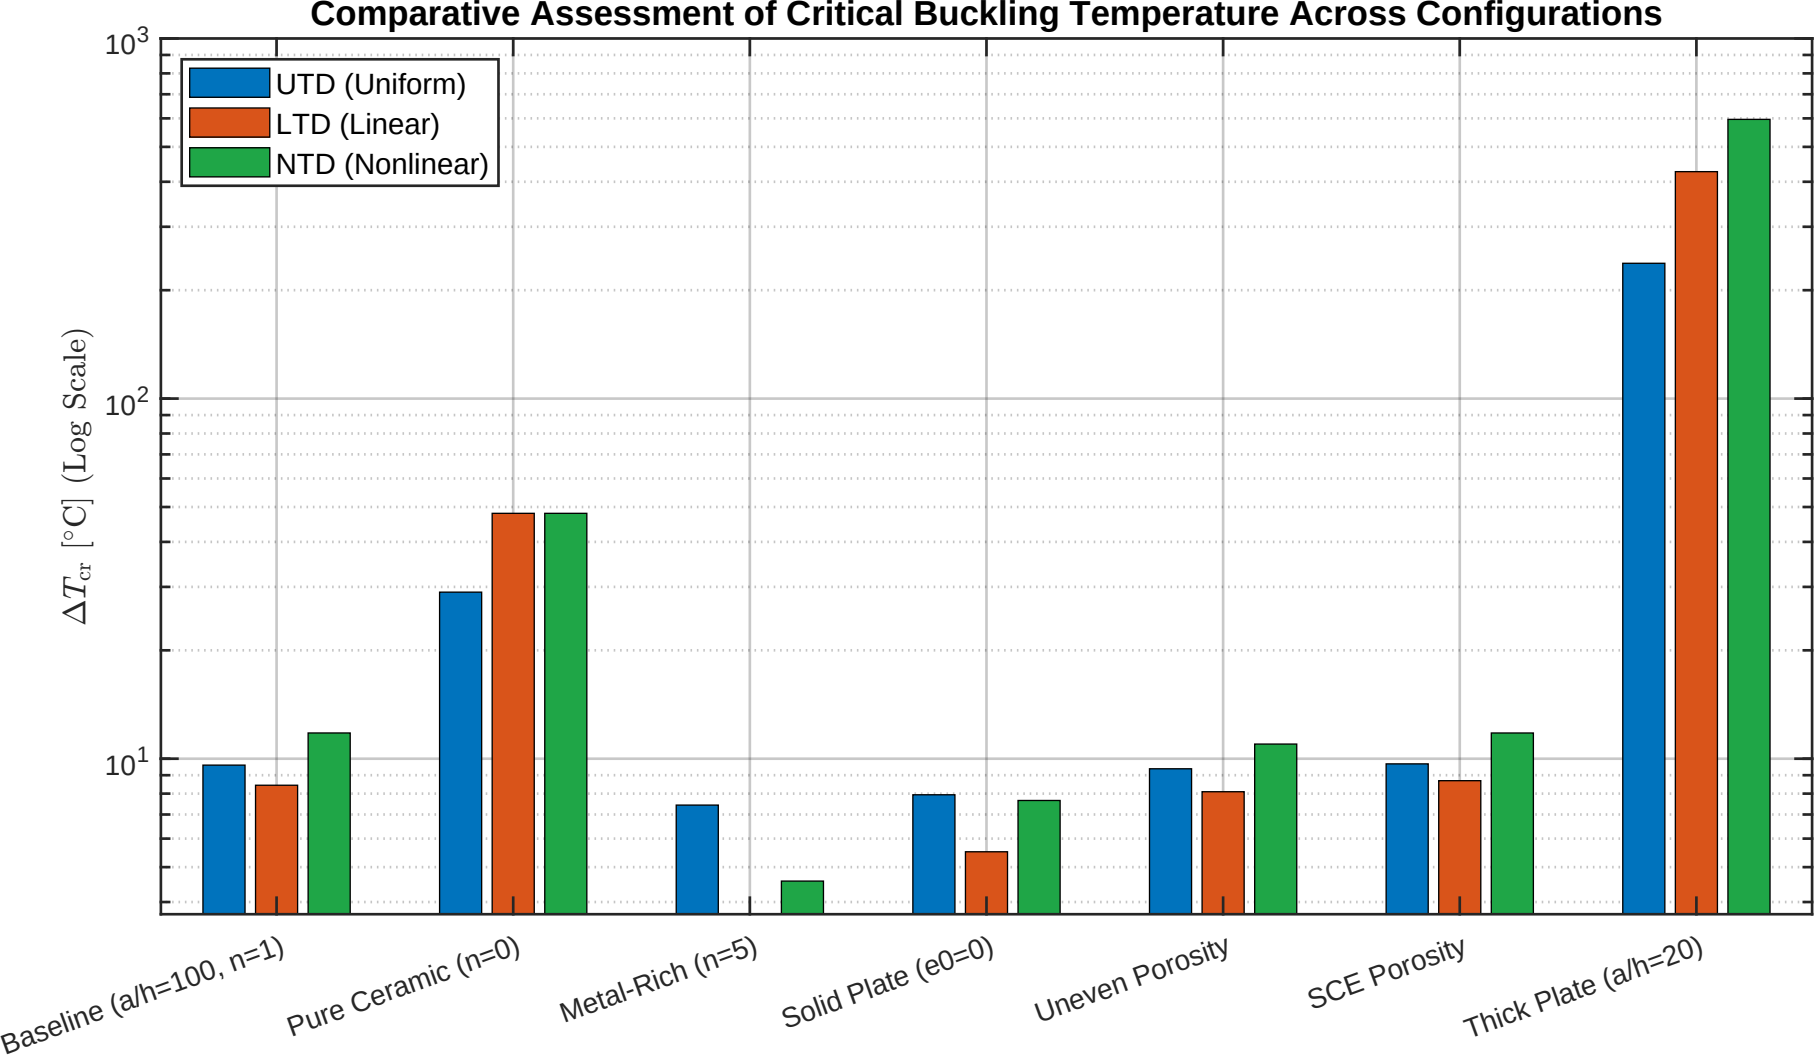
Comparative Assessment of Critical Buckling Temperature Across Configurations
UTD (Uniform)
LTD (Linear)
NTD (Nonlinear)
10^3
10^2
10^1
ΔT_{cr} [°C] (Log Scale)
Baseline (a/h=100, n=1)
Pure Ceramic (n=0)
Metal-Rich (n=5)
Solid Plate (e0=0)
Uneven Porosity
SCE Porosity
Thick Plate (a/h=20)