VLAN Configuration Assignment Report

1. Network Diagram

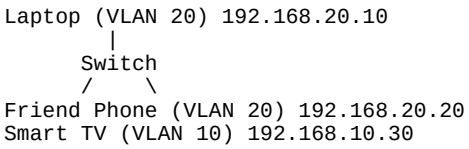

VLAN 10 is used for streaming devices. VLAN 20 is used for personal devices.

2. Simulated Switch Configuration

```
enable
configure terminal
vlan 10
 name STREAMING
vlan 20
 name PERSONAL

interface range fa0/1-3
 switchport mode access
 switchport access vlan 10

interface range fa0/4-5
 switchport mode access
 switchport access vlan 20
```

Verification: PCs in VLAN 10 can communicate with each other. PCs in VLAN 20 can communicate with each other. Inter-VLAN ping fails because no router or Layer-3 switch is configured.

3. Moving a PC from VLAN 10 to VLAN 20

```
Before:
interface fa0/3
 switchport access vlan 10

After:
interface fa0/3
 switchport access vlan 20
```

Result: The PC becomes part of VLAN 20 and can communicate with VLAN 20 hosts while losing direct Layer-2 connectivity with VLAN 10 hosts.

4. Automating Assignment of 10 Ports to VLAN 30

```
configure terminal
vlan 30
 name OFFICE
interface range fa0/1-10
 switchport mode access
 switchport access vlan 30
```

The interface range command assigns ports 1 through 10 to VLAN 30 without repeating the command for every port.