
MVLU COLLEGE
WSN PRACTICAL 4

Aim:Simulation of Single Mote using TOSSIM

To simulate a single sensor node in TOSSIM and observe its execution logs, you will need a basic TinyOS application (like Blink), a Python simulation script, and a configuration file for the radio topology.


Place the following devices:

- 3 × Routers 1941
- 4 × PCs
- 4 × Switches 2960

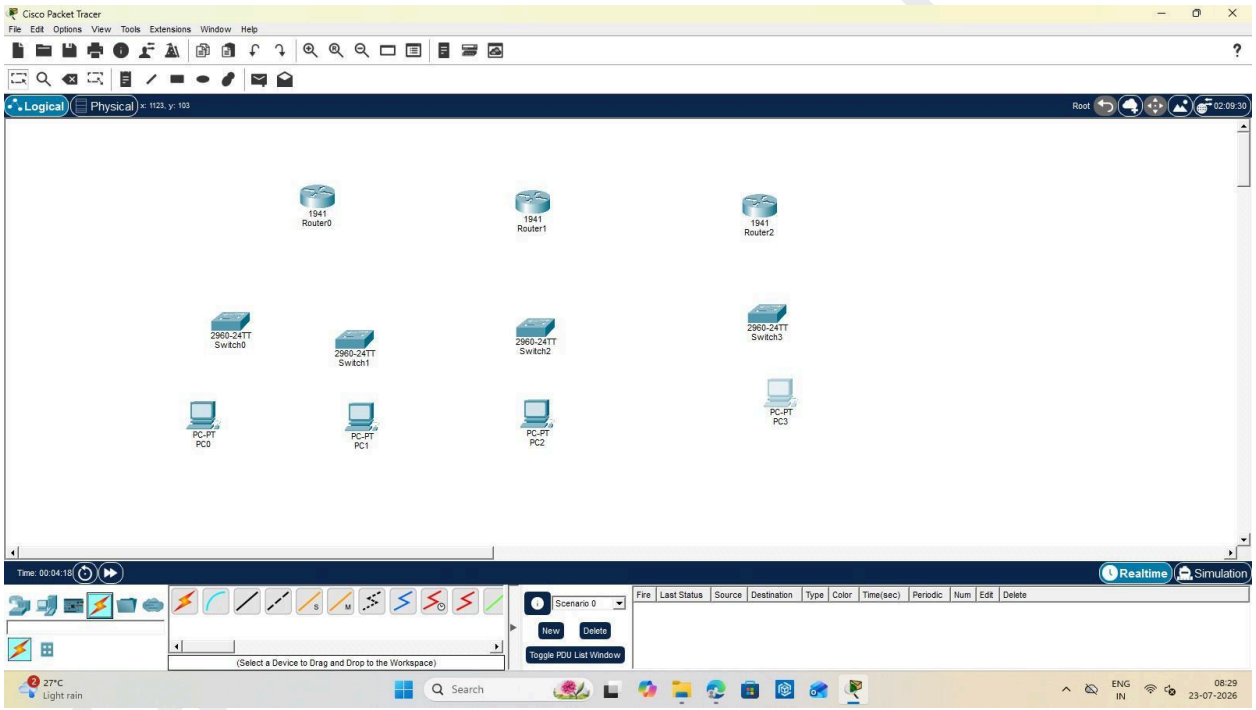


Hariprasad Vishwakarma
T127
TYCS

Step 2: Connect the Devices

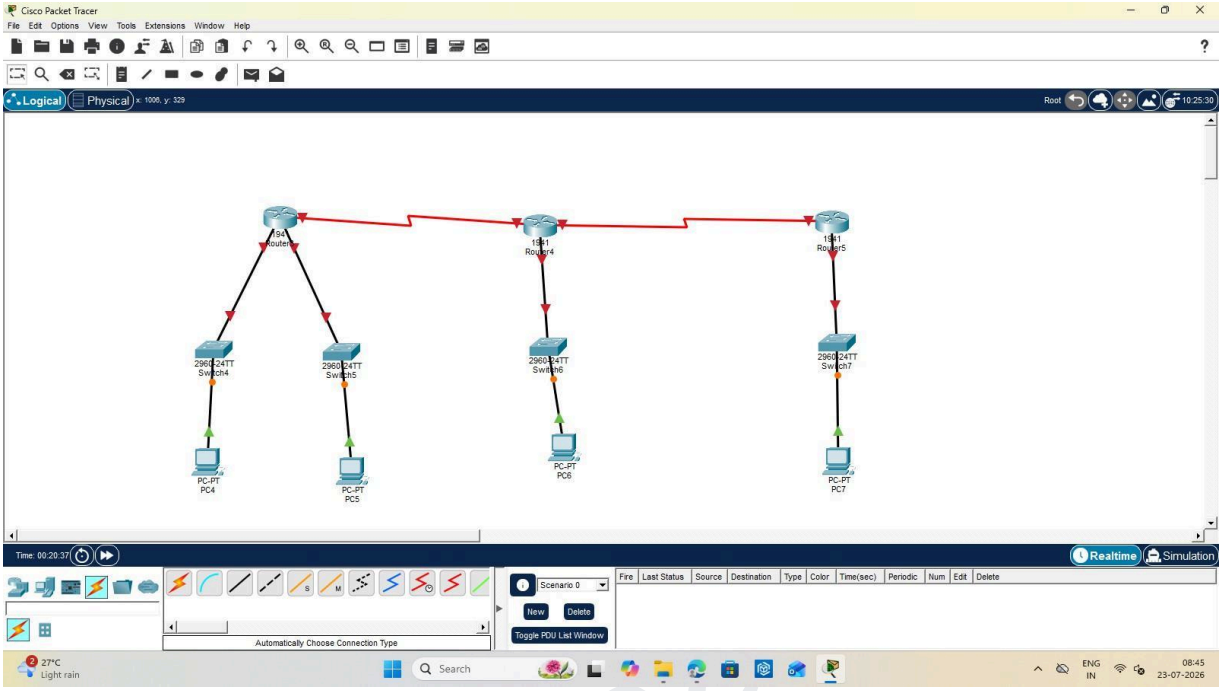


Hariprasad

Hariprasad Vishwakarma
T127
TYCS

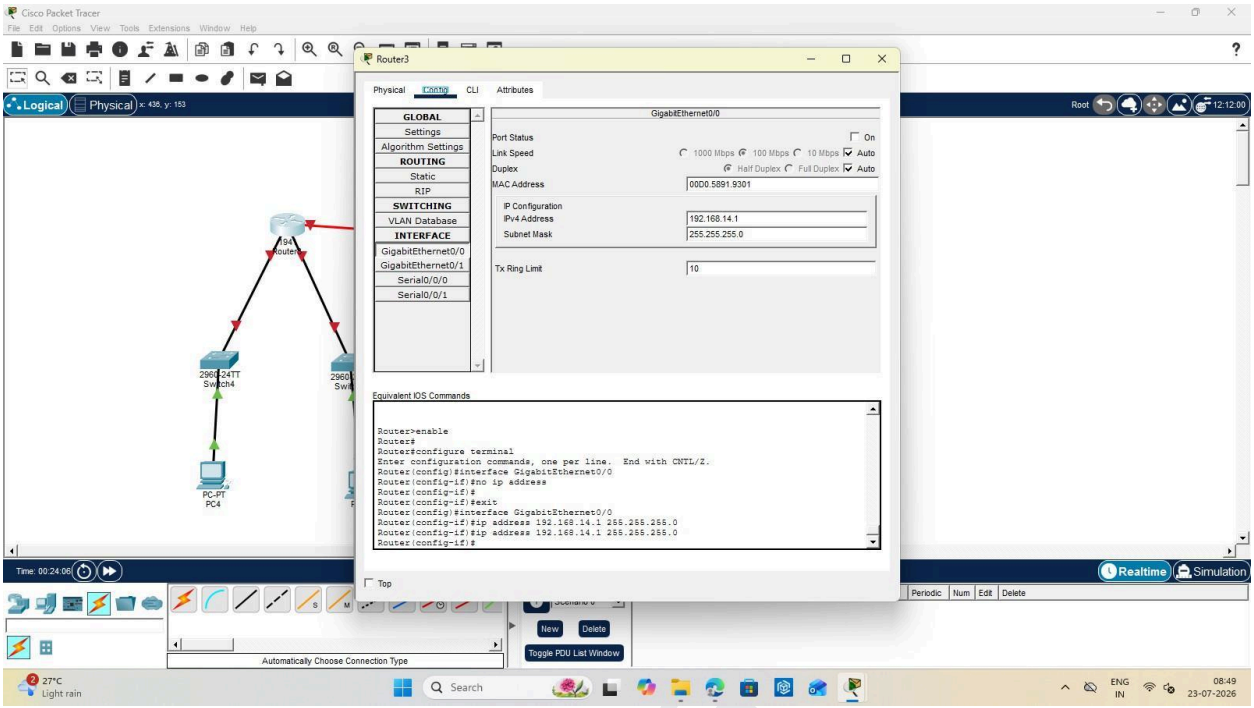


Step 3: Assign IP Addresses Router A

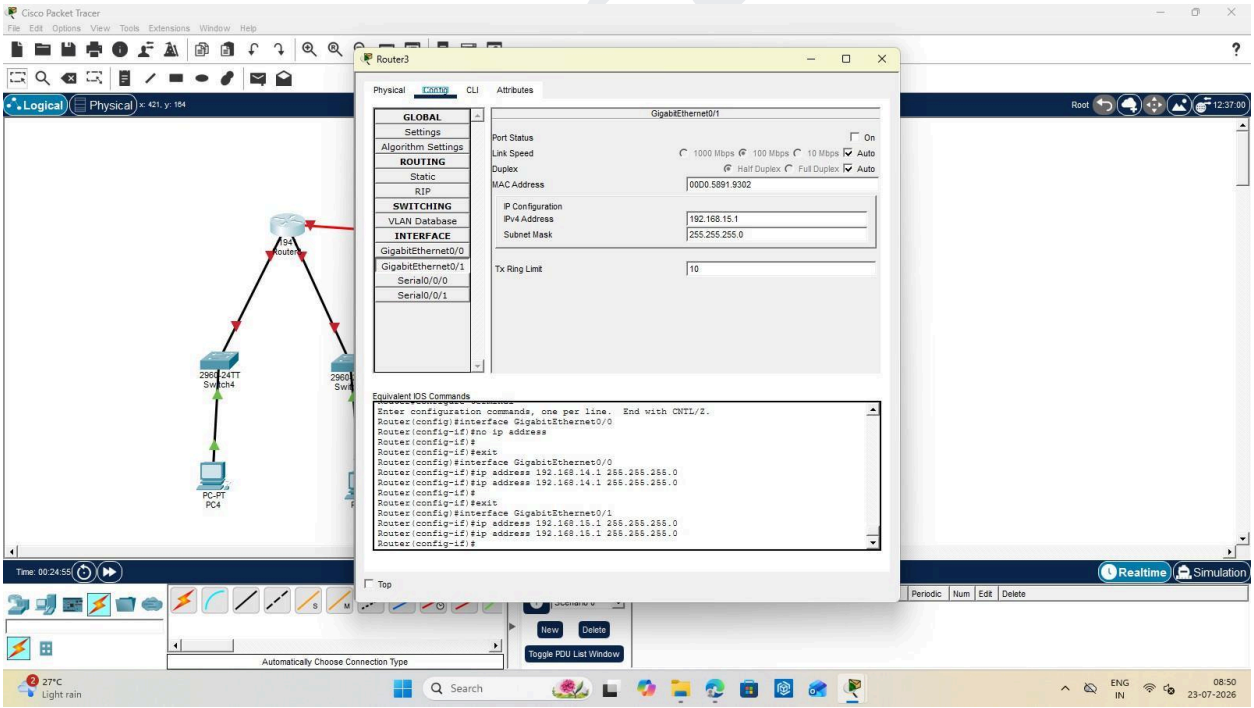


Hariprasad Vishwakarma
T127
TYCS

MVLU COLLEGE
WSN PRACTICAL 4

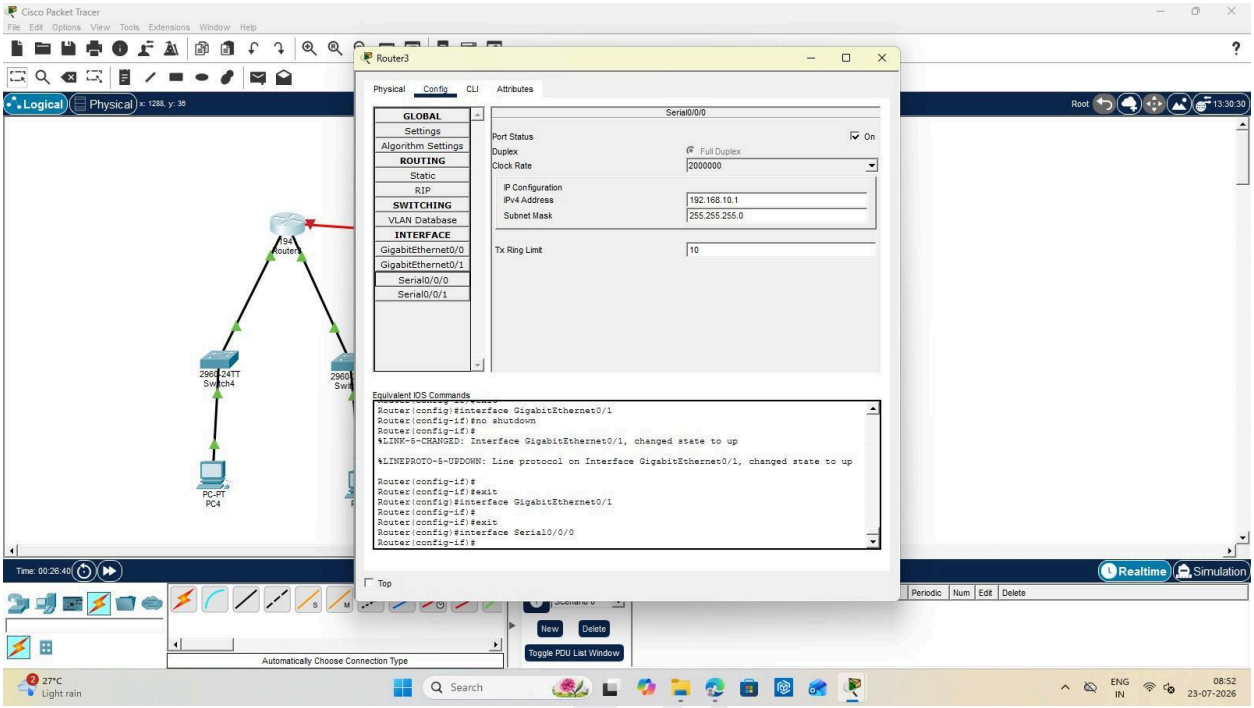


Router B

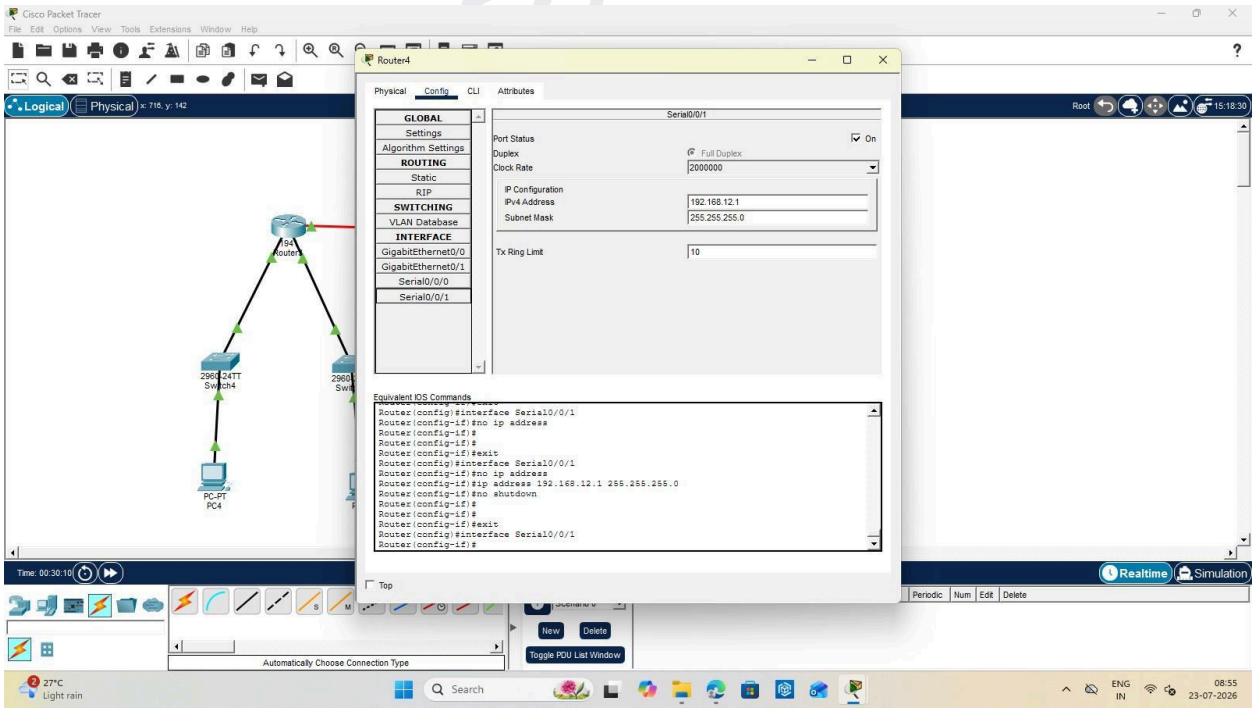


Hariprasad Vishwakarma
T127
TYCS


MVLU COLLEGE
WSN PRACTICAL 4

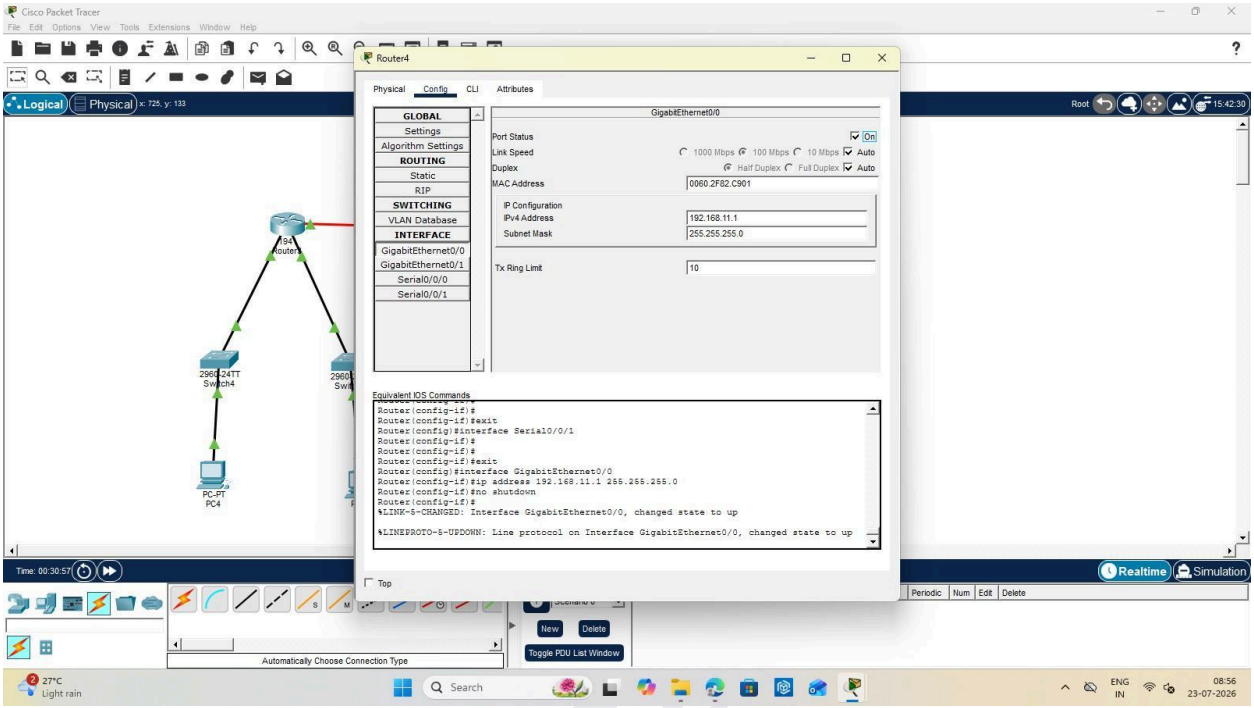


Router C

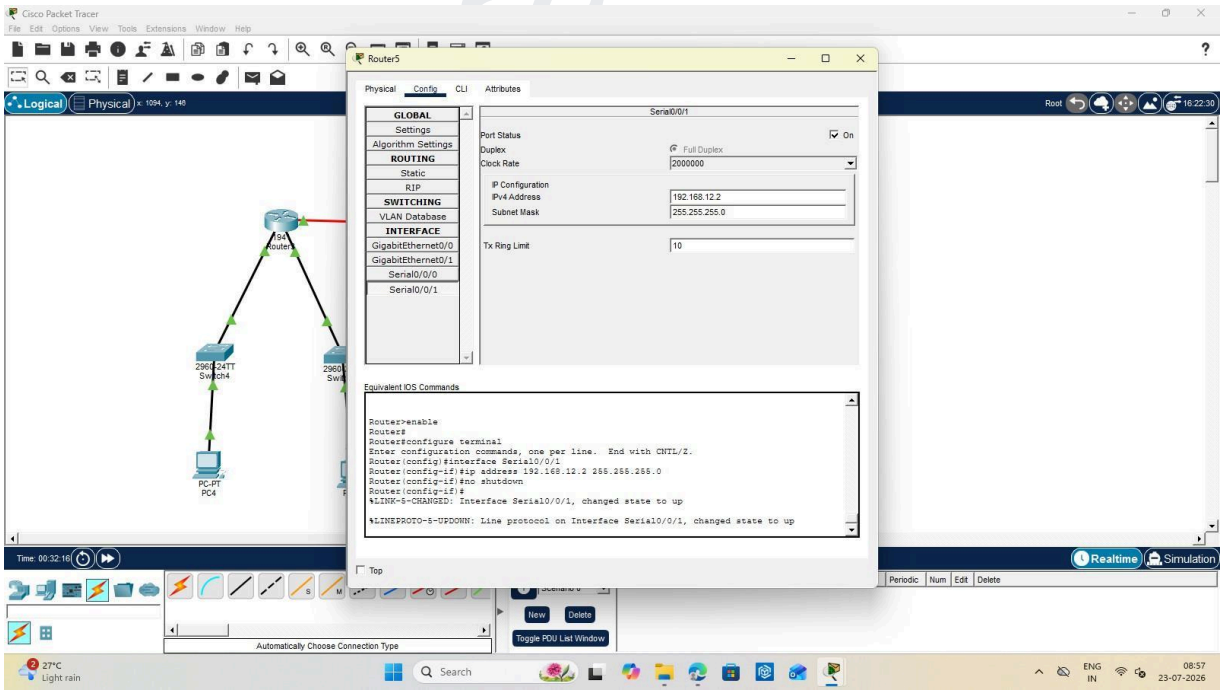

Hariprasad Vishwakarma
T127
TYCS

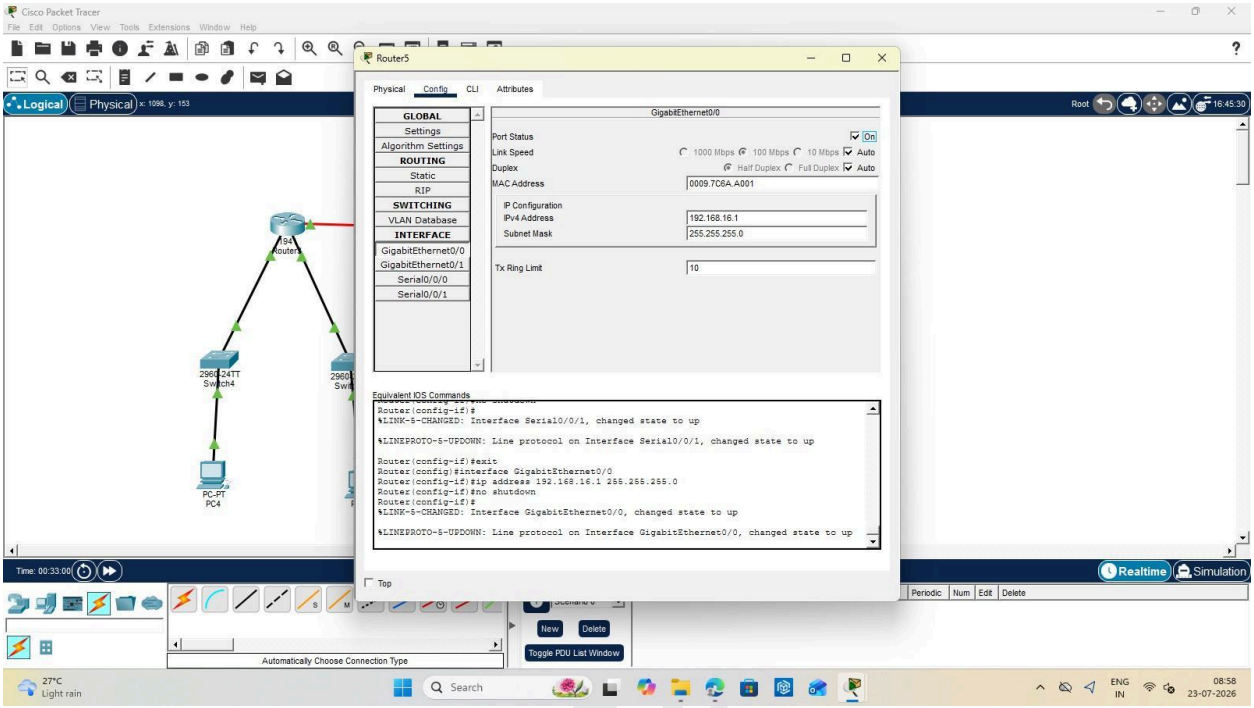


Step 4: Configure PCs, PC0

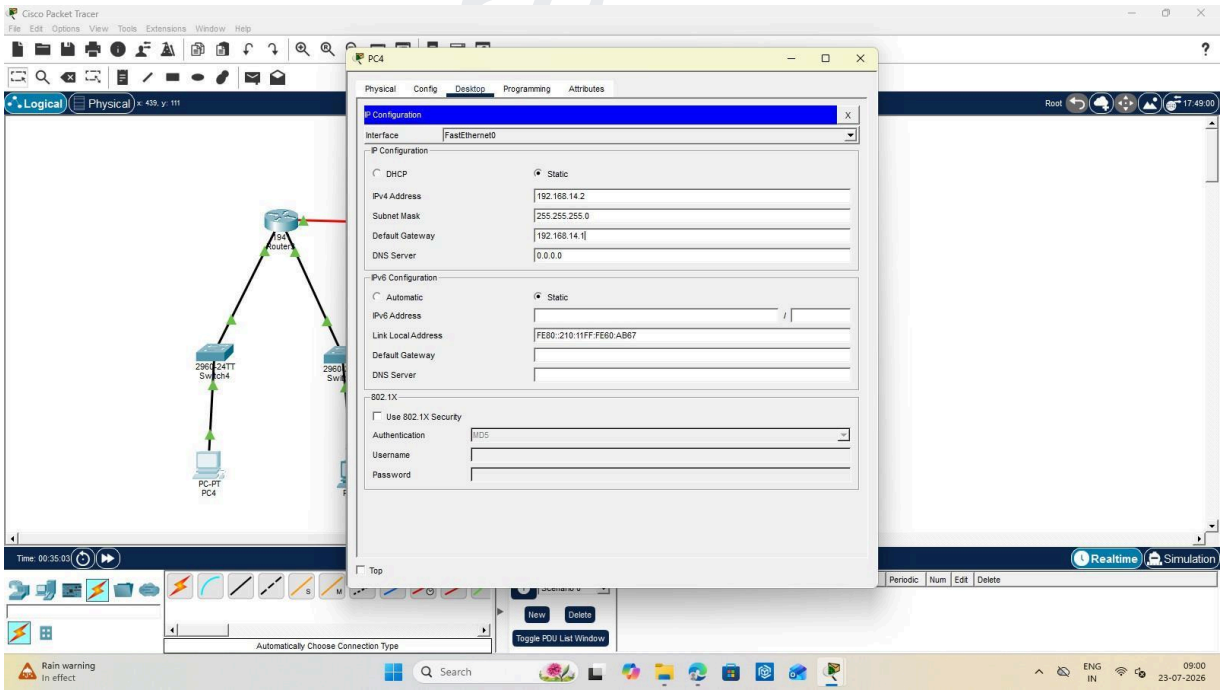


Hariprasad Vishwakarma
T127
TYCS


MVLU COLLEGE
WSN PRACTICAL 4

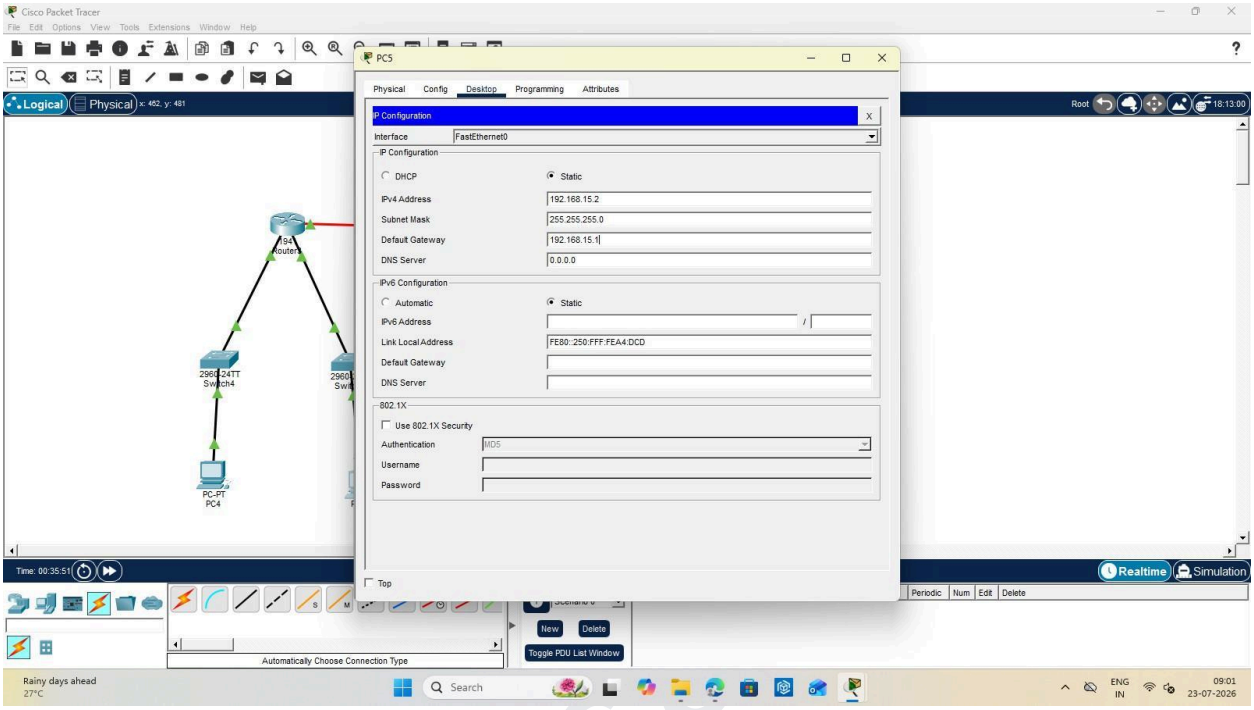


PC2

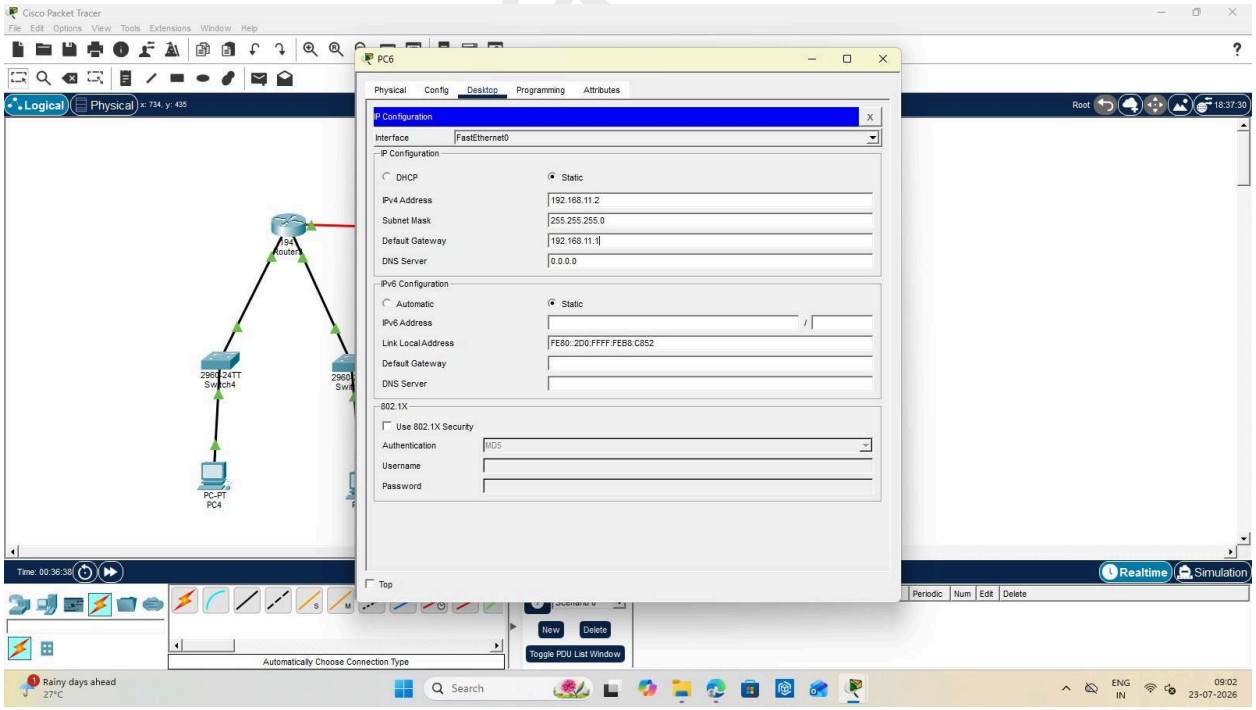

Hariprasad Vishwakarma
T127
TYCS

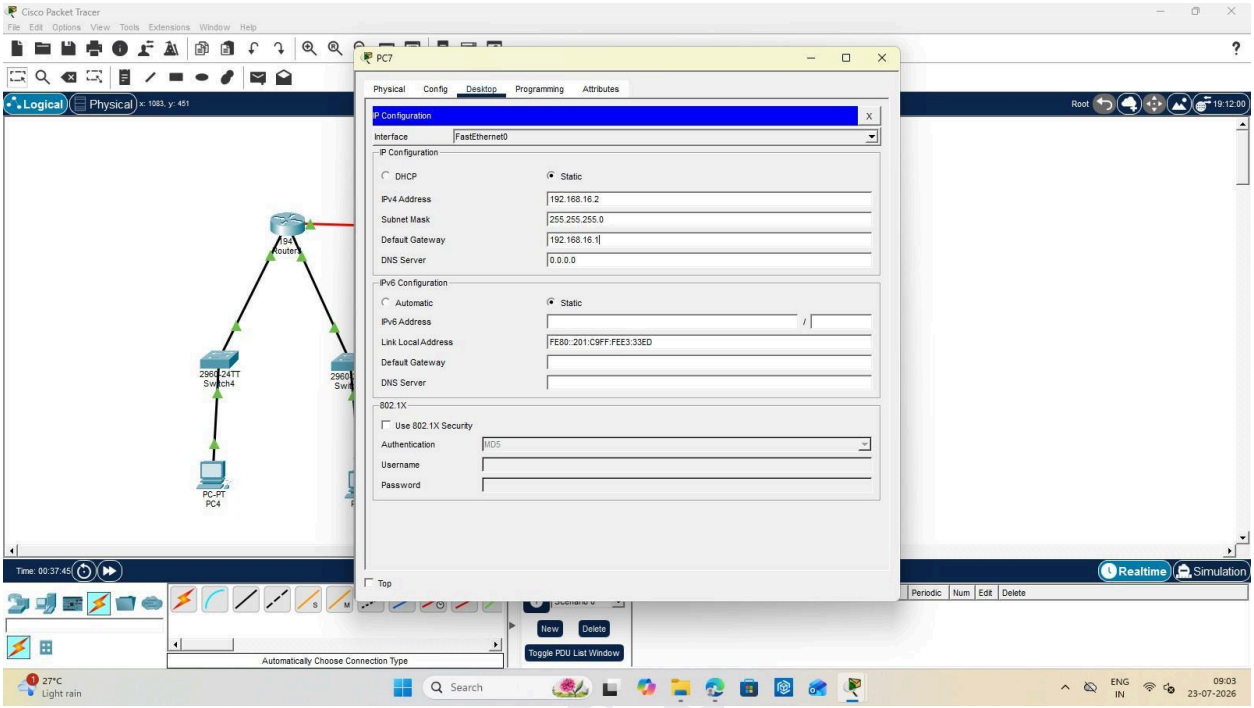

Step 5: Configure Router Interfaces Router A

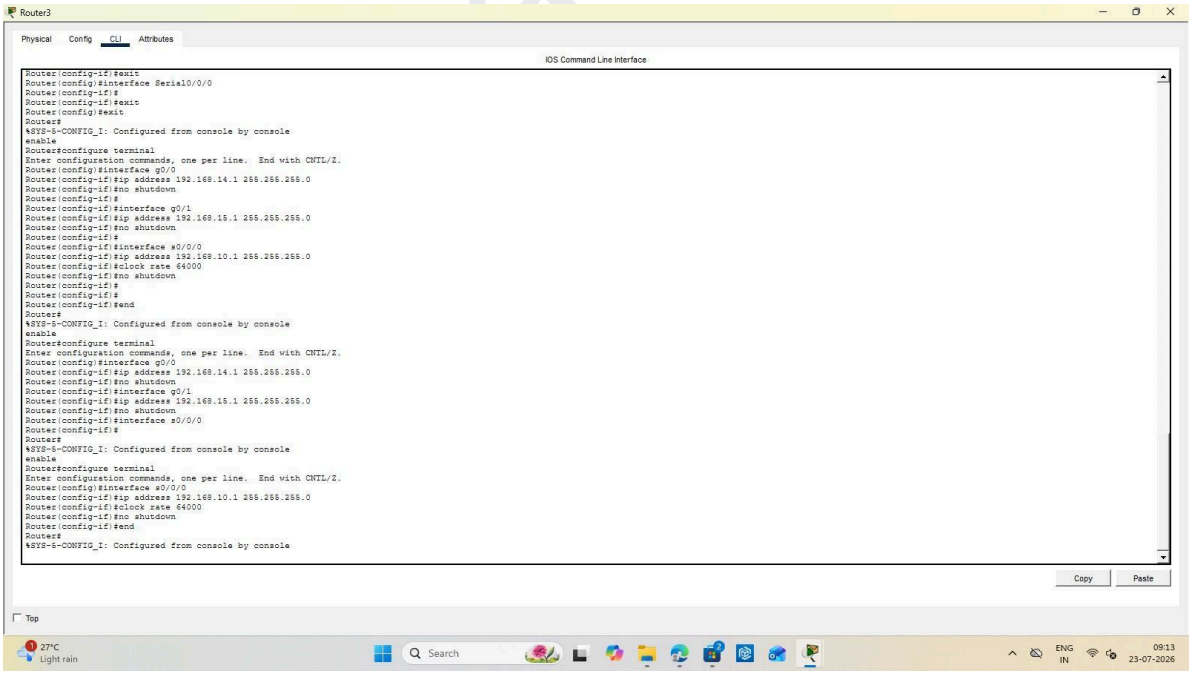

Hariprasad Vishwakarma
T127
TYCS


MVLU COLLEGE
WSN PRACTICAL 4

Hariprasad T127


Hariprasad Vishwakarma
T127
TYCS

MVLU COLLEGE
WSN PRACTICAL 4

ROUTER B

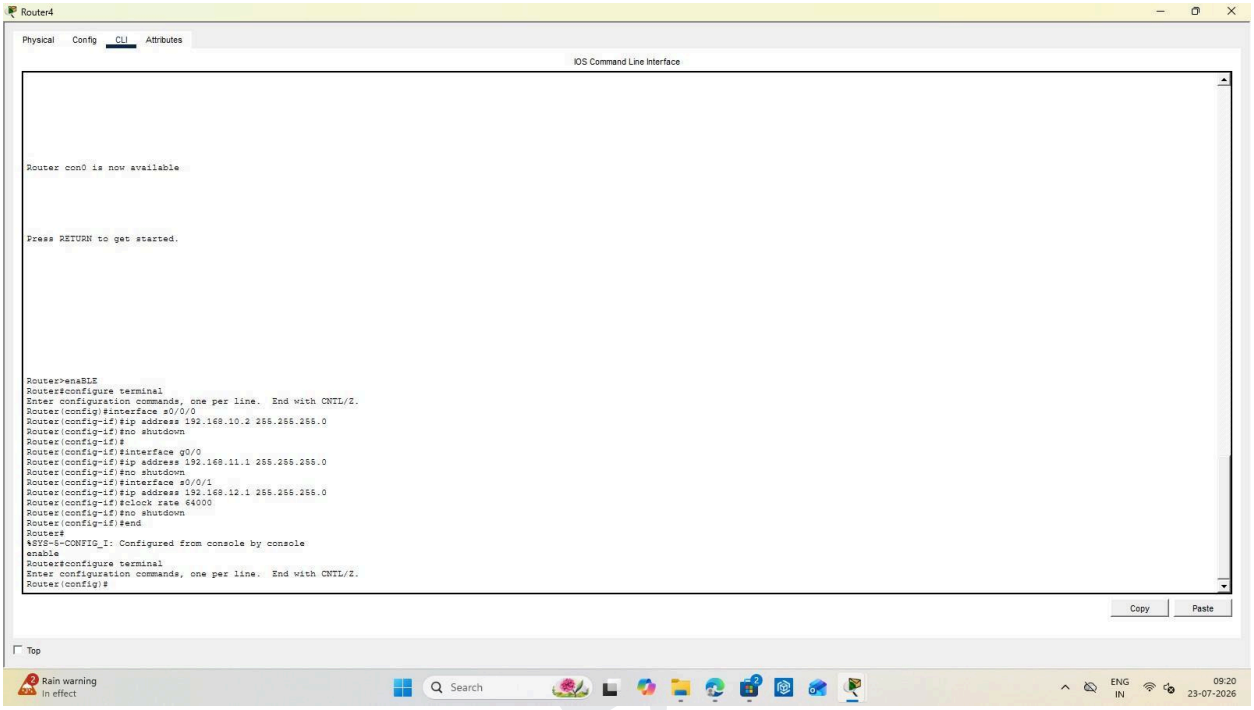


ROUTER C

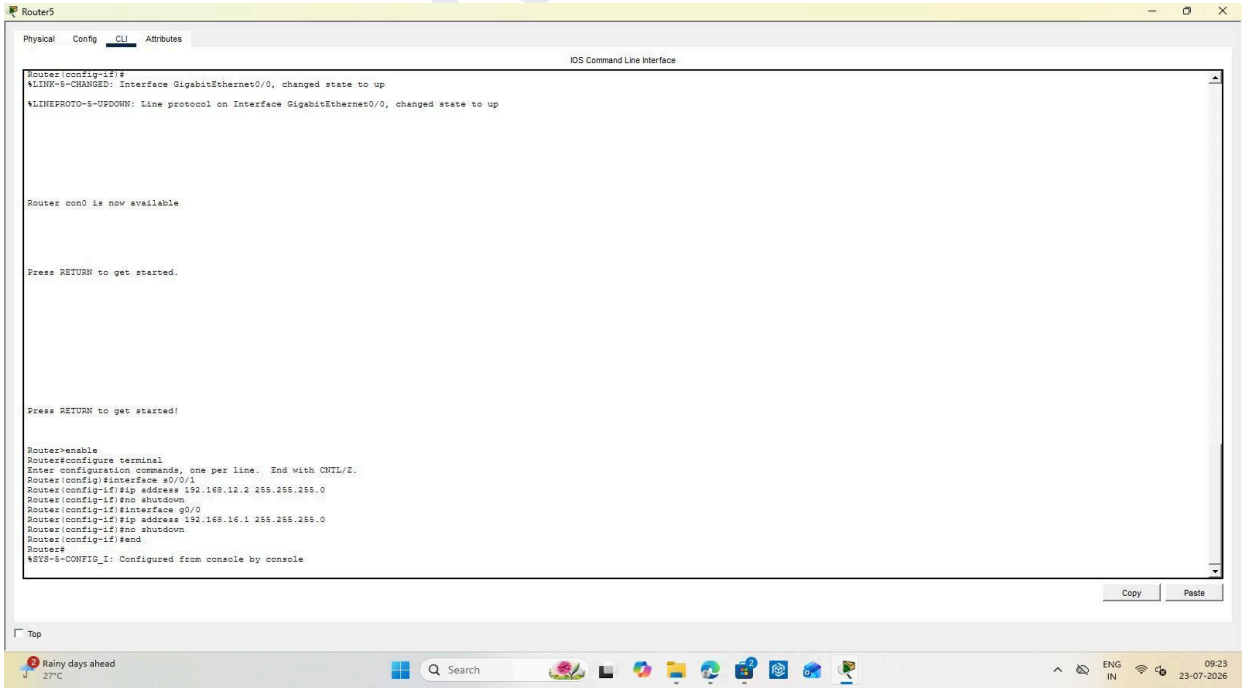


Hariprasad Vishwakarma
T127
TYCS

Step 6: Configure RIP Version 2, ROUTER A

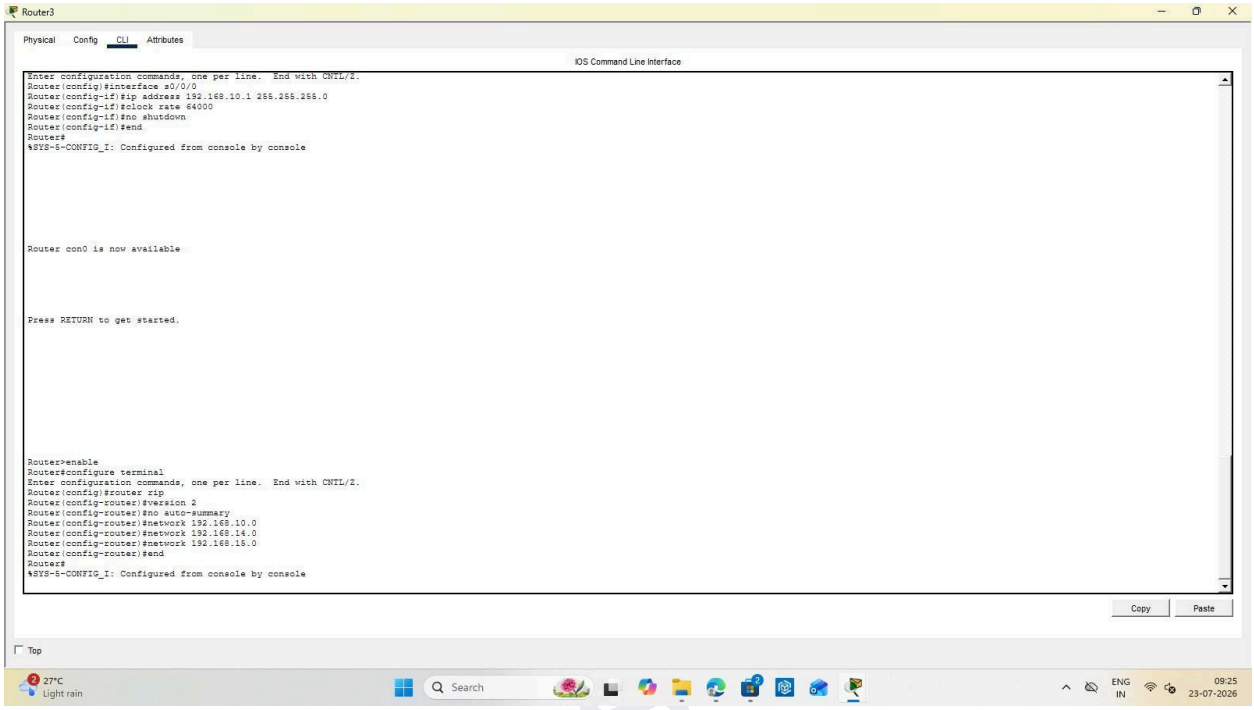


ROUTER B

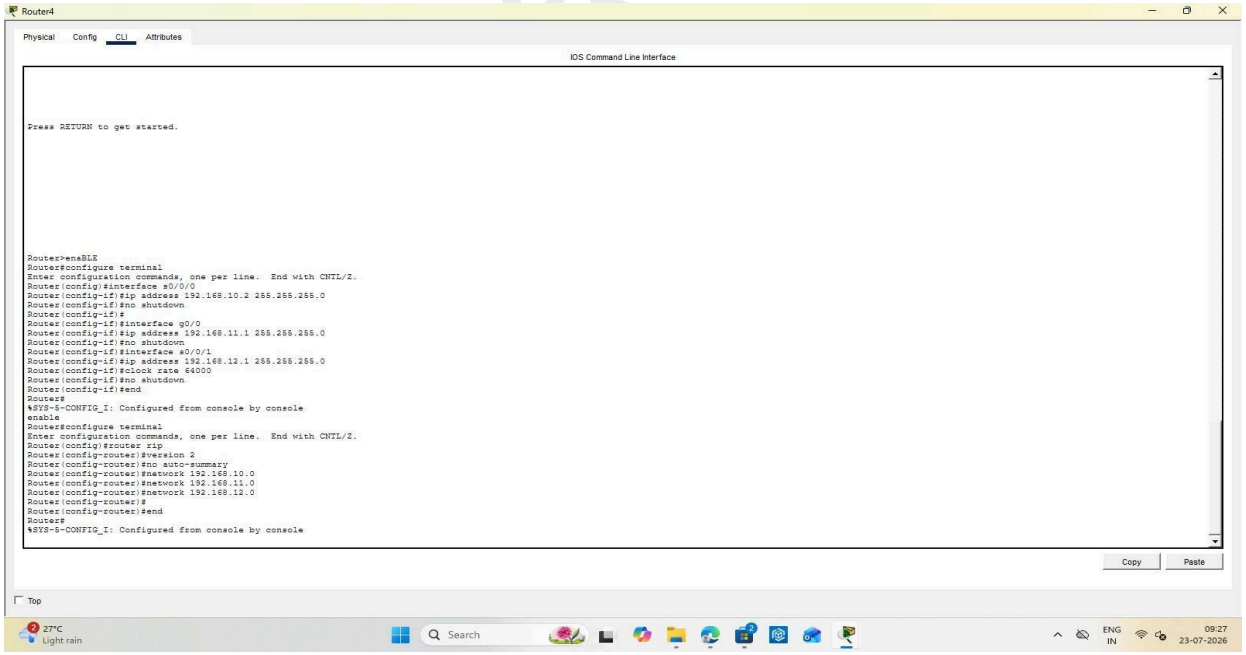


Hariprasad Vishwakarma
T127
TYCS

MVLU COLLEGE
WSN PRACTICAL 4

ROUTER C

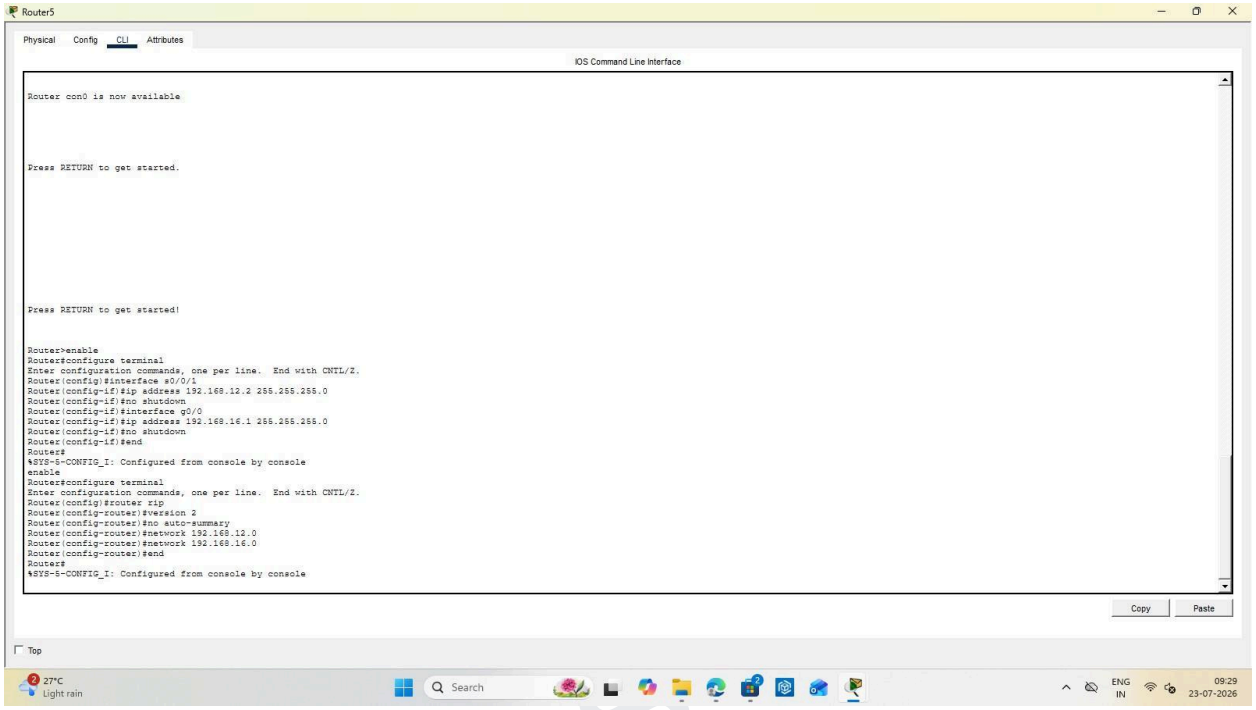


Step 7: Test Connectivity, From PC0 to PC3

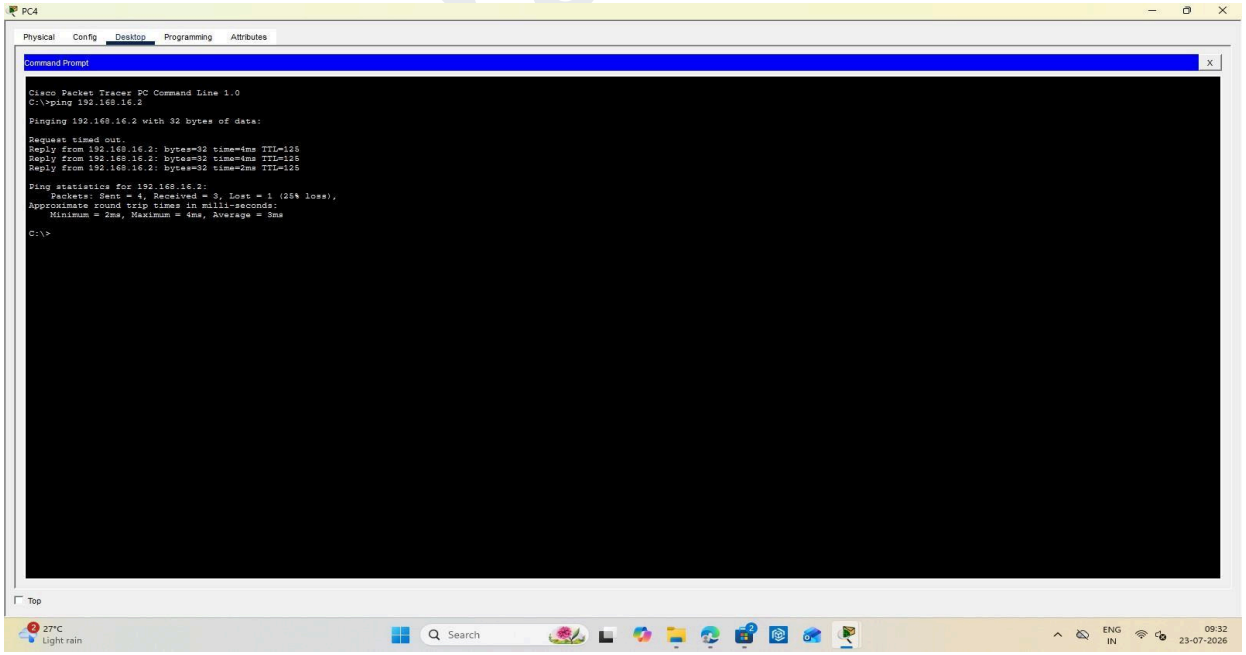


Hariprasad Vishwakarma
T127
TYCS

Step 8 : Analyze the Routing Table from PC0 to PC3

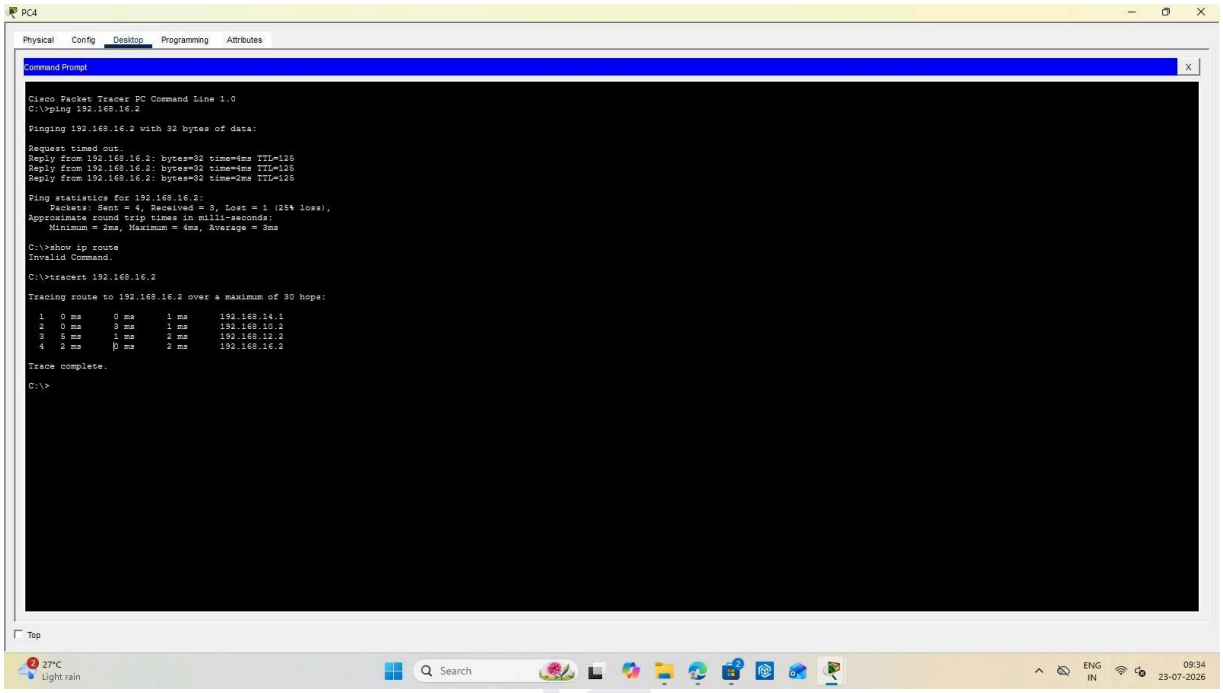

WIRELESS VERSION

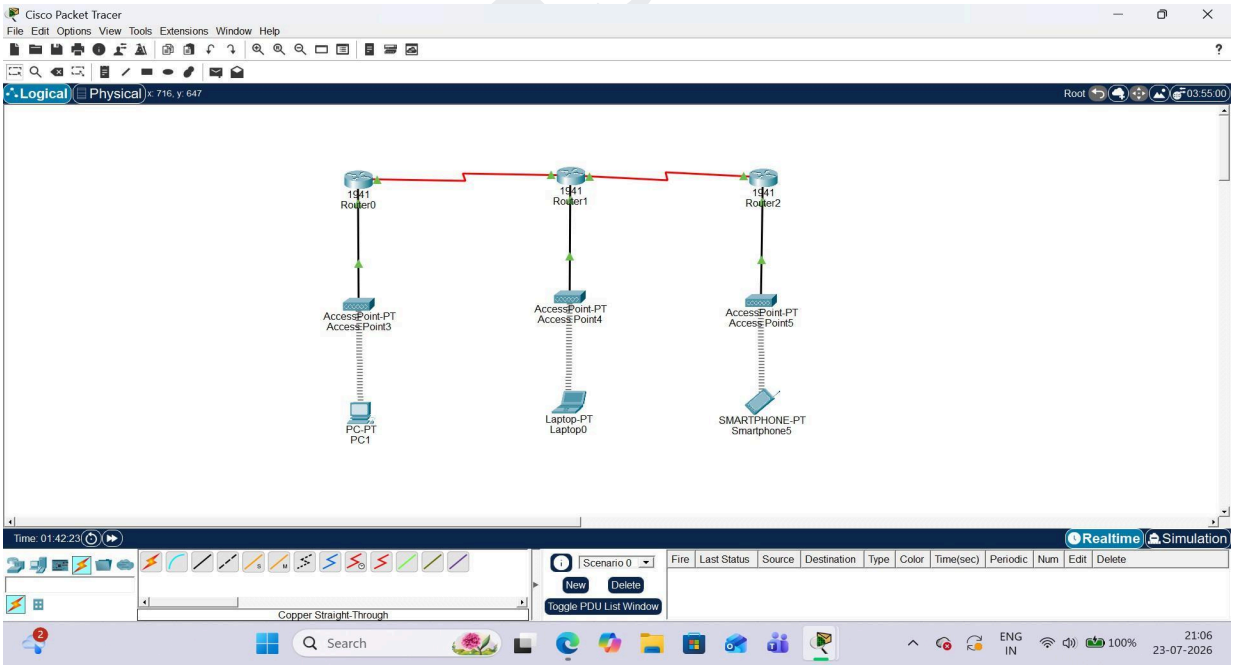

Topology

Hariprasad Vishwakarma
T127
TYCS

MVLU COLLEGE
WSN PRACTICAL 4


Hariprasad T127

Hariprasad Vishwakarma
T127
TYCS


MVLU COLLEGE
WSN PRACTICAL 4

Configure Router IP Addresses

ROUTER 0

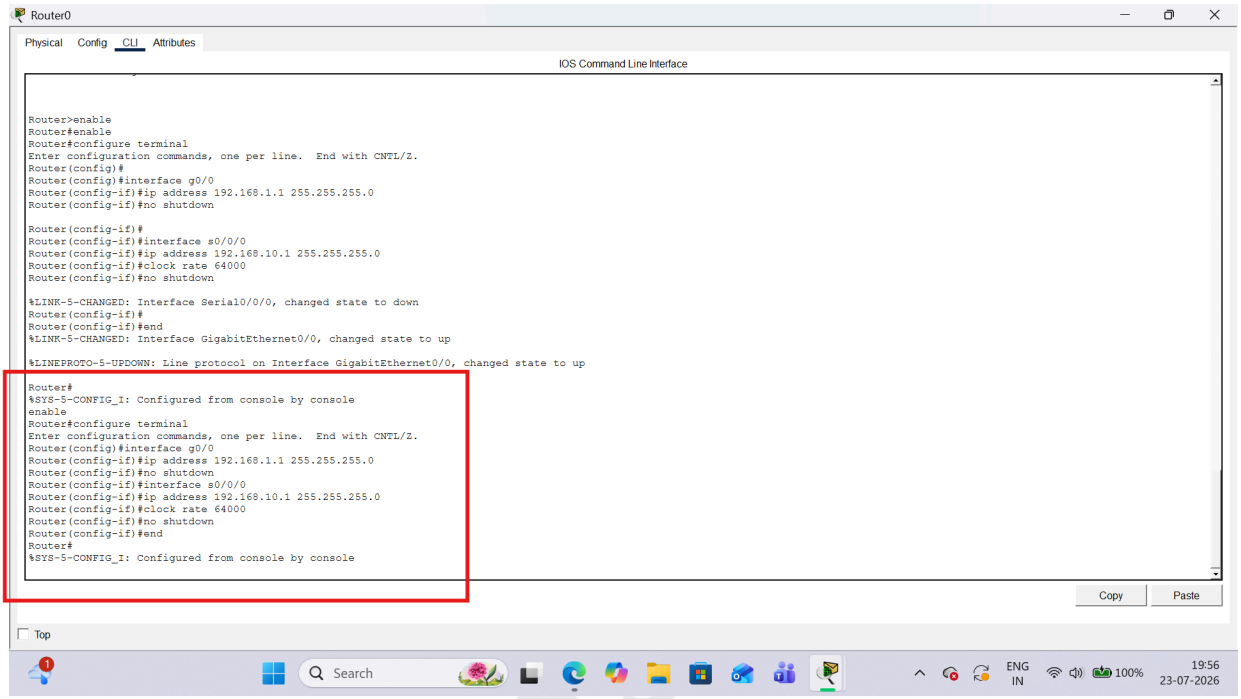


ROUTER 1

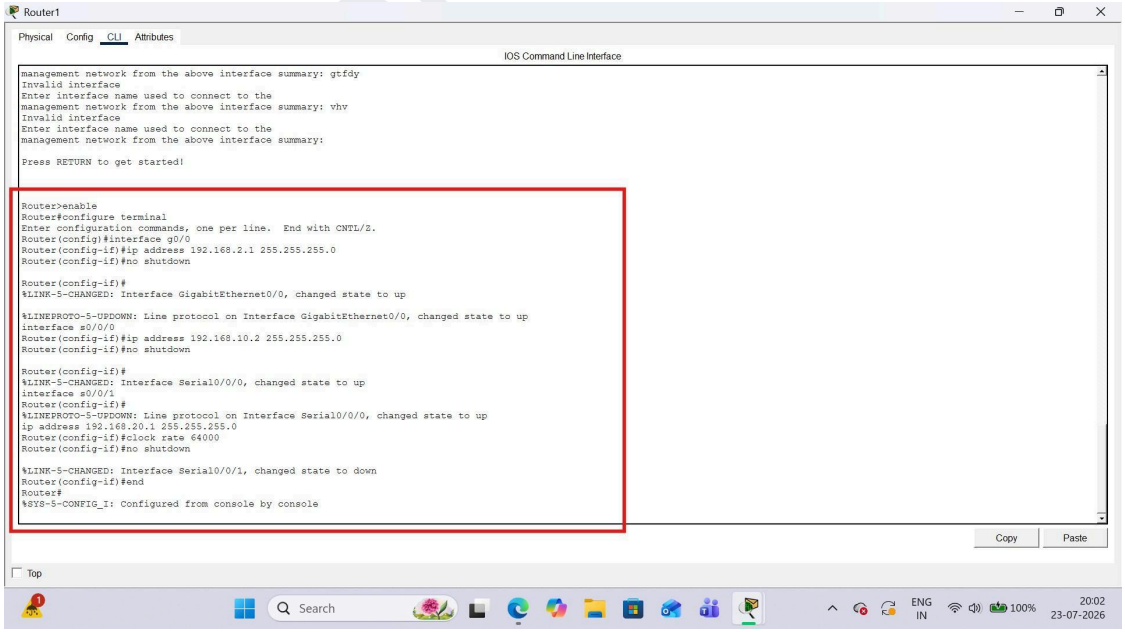


Hariprasad Vishwakarma
T127
TYCS

MVLU COLLEGE
WSN PRACTICAL 4

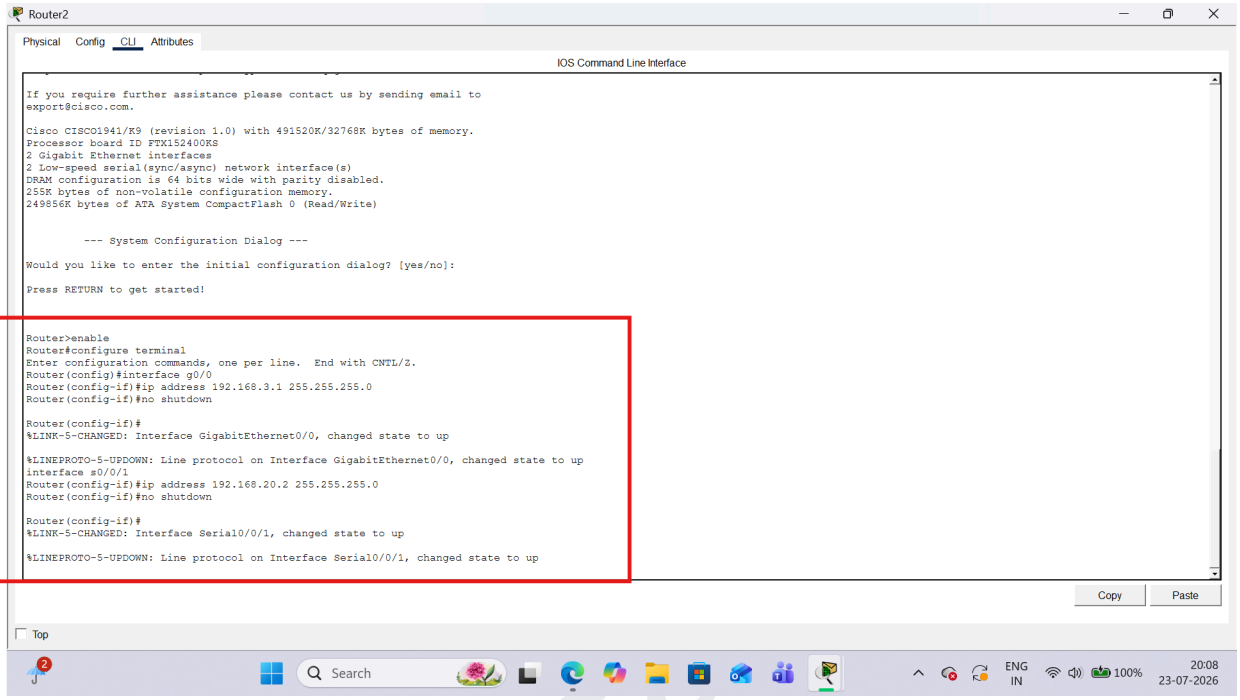


Configure RIP ROUTER 0

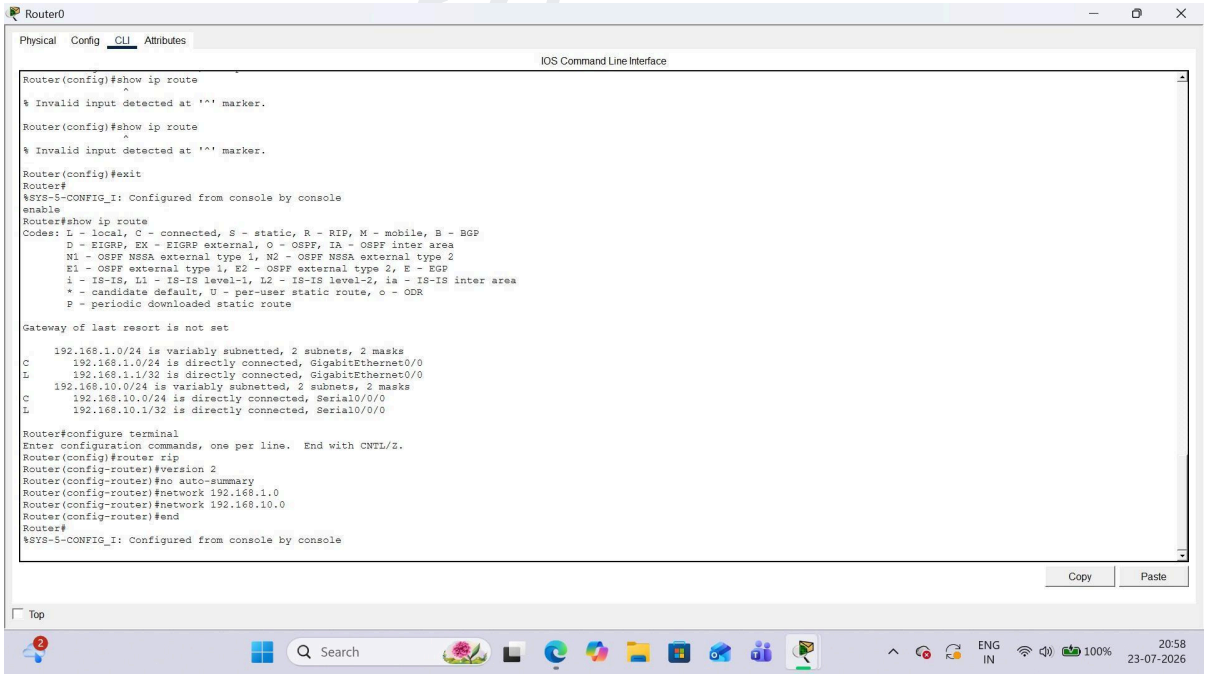

Hariprasad Vishwakarma
T127
TYCS


MVLU COLLEGE
WSN PRACTICAL 4

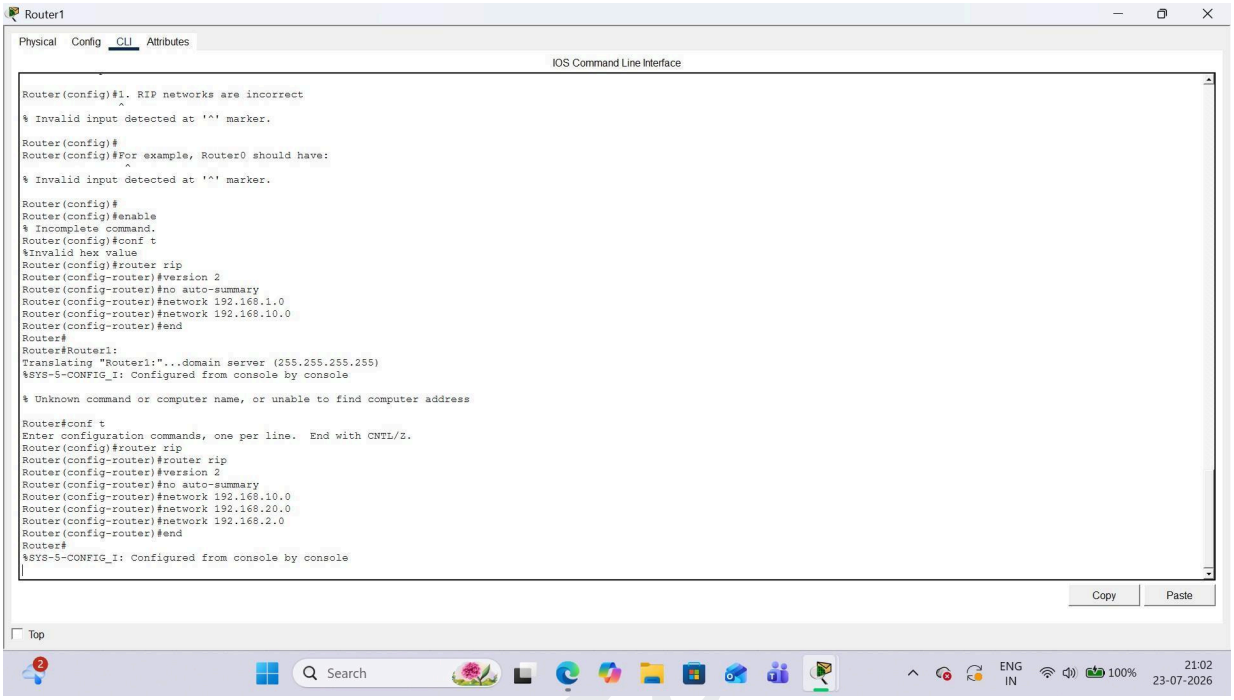


Hariprasad

Hariprasad Vishwakarma
T127
TYCS

ROUTER 2

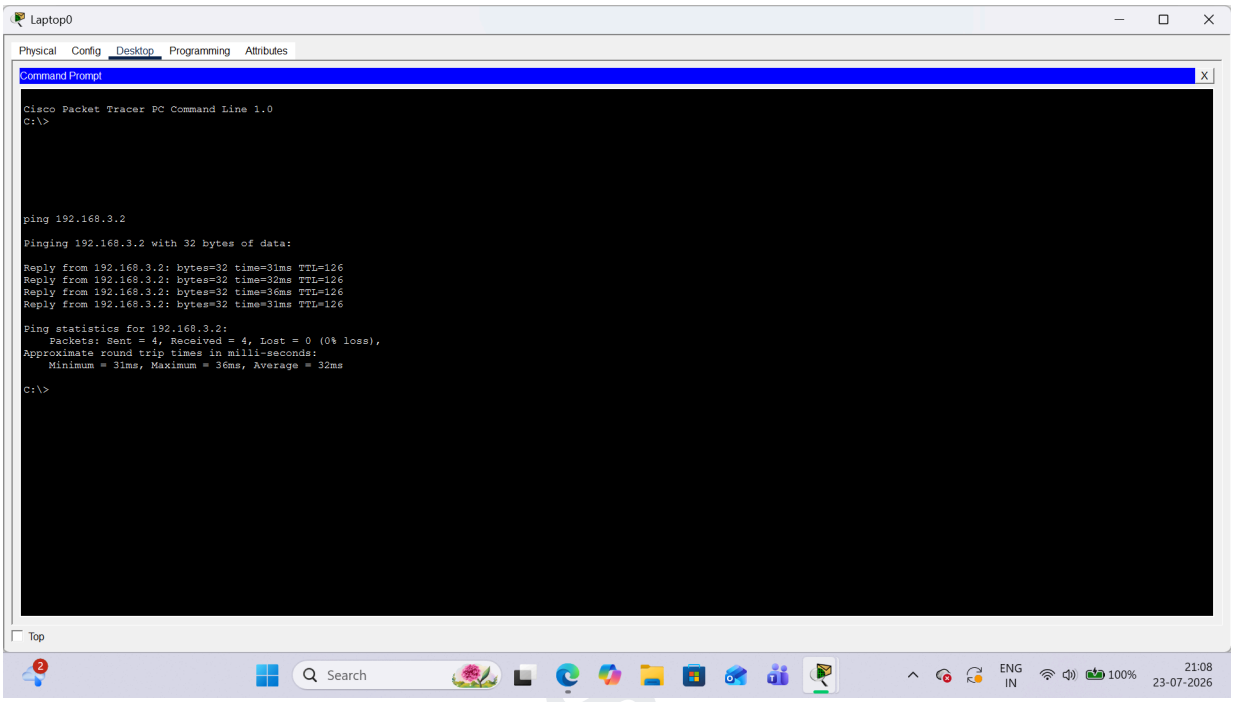


Routing Table path from PC to Laptop

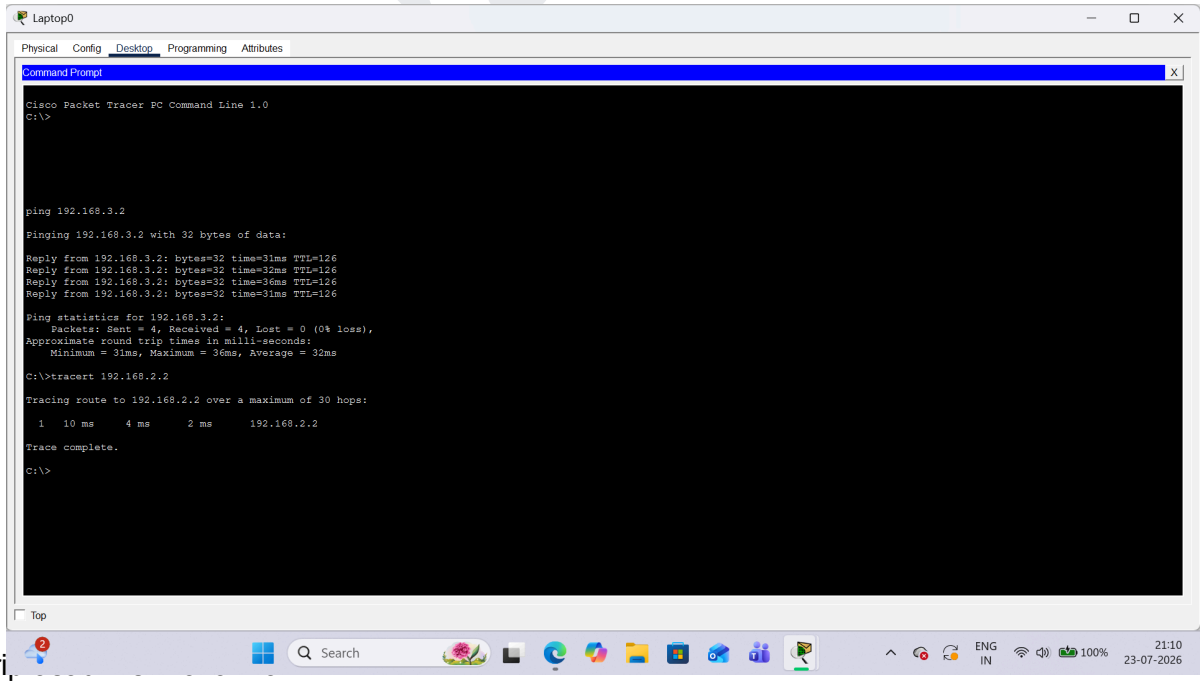

Hari
T127
TYCS

MVLU COLLEGE
WSN PRACTICAL 4

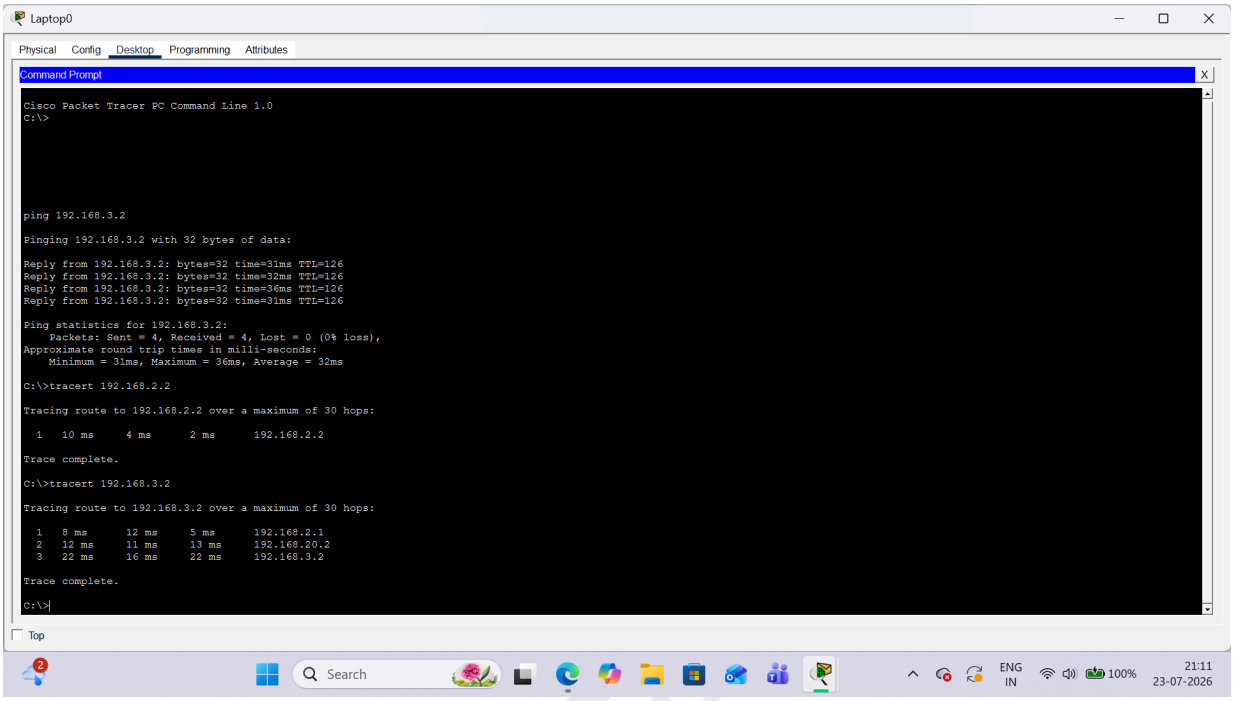

Hariprasad

Hariprasad Vishwakarma
T127
TYCS