N GANDHI ADVANCE ENGINEERING PRIVATE LIMITED.

An ISO 9001:2015 Certified Company

Engineering Excellence.
Trusted Quality.





www.naepl.in

N GANDHI ADVANCE ENGINEERING PRIVATE LIMITED.
An ISO 9001:2015 Certified Company

One-Stop Engineering Solutions

N Gandhi Advance Engineering Private Limited (NAEPL) is the engineering arm of the N Gandhi Group, combining advanced manufacturing capabilities, in-house engineering expertise and a strong focus on precision, quality and reliability. With experience across diverse industrial requirements, we develop and manufacture engineered components and solutions designed to meet demanding application and performance requirements. Our focus on controlled manufacturing processes, technical precision and consistent quality enables us to serve both domestic and international markets.
We are committed to delivering **reliable products, responsive service** and **cost-effective engineering solutions** while maintaining internationally recognised quality standards.

ISO 9001:2015 CERTIFIED
Quality-focused processes aligned with internationally recognised management standards.

ADVANCED MANUFACTURING
Modern manufacturing capabilities with controlled and efficient production processes.

PRECISION ENGINEERING
Engineered components manufactured with accuracy, consistency and attention to detail.

QUALITY ASSURANCE
Rigorous quality checks to ensure dependable and consistent product performance.

IN-HOUSE CAPABILITIES
Integrated engineering and manufacturing capabilities for better control and responsiveness.

FLEXIBLE PRODUCTION
Suitable for low-volume requirements as well as larger production runs.

ON-TIME DELIVERY
Planned production and logistics support for reliable delivery schedules.

GLOBAL REACH
Serving international markets with products manufactured to consistent quality standards.

OUR BRANDS

N-LOC™
STAINLESS STEEL CABLE TIES

LUGX™
THE POWER OF PERFECT GRIP

LINKBOX™
STRONG CONNECTIONS. SAFE SYSTEMS

INDEX

Stainless Steel Cable Ties	08-25
Cable Marker Tag	26-28
Cable Cleat	30-33
Junction Box	34-47
LUG	48-88
CNC Machine Components	90-95
Sheet Metal Press Parts	96-100

N-LOC™

STAINLESS STEEL CABLE TIES

N-LOC is **NAEPL**'s specialized brand focused on reliable cable management and identification solutions. The brand offers stainless steel cable ties, cable markers and identification products designed for secure and organized cable installations. **N-LOC** products are suitable for demanding applications where strength, durability, temperature resistance and corrosion resistance are essential.

LUGX™

THE POWER OF PERFECT GRIP

LUGX is **NAEPL**'s specialized brand for cable lugs, terminals and electrical connectivity solutions. The range is designed to provide secure mechanical grip, reliable electrical conductivity and long-lasting connections across a wide variety of electrical and industrial applications. **LUGX** combines functional design and dependable performance to support safe and efficient electrical installations.

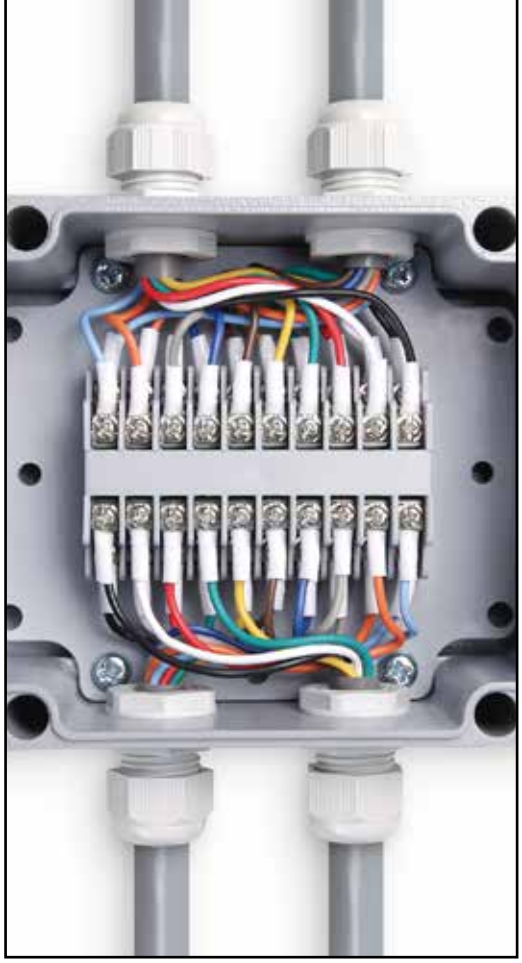

LINKBOX™

STRONG CONNECTIONS. SAFE SYSTEMS

LINKBOX is **NAEPL**'s brand for junction boxes and electrical enclosures, offering solutions in Aluminium, Mild Steel and Stainless Steel. Designed to safely house and protect electrical connections and components, **LINKBOX** products provide strength, durability and dependable protection for industrial and infrastructure environments. The range is suitable for applications requiring secure connections and robust enclosure solutions.

OTHER PRODUCTS

Cable Cleat

CNC Machine Components

Sheet Metal Press Parts

N-LOC™

STAINLESS STEEL CABLE TIES

PREMIUM QUALITY
High-grade stainless steel for durable cable fastening.

SUPERIOR STRENGTH
High tensile strength for secure, heavy-duty applications.

Fire Proof

Corrosion Resistant

Extreme Temperature Resistant

Long-lasting cable fastening built for harsh environments.

Secure Today. Reliable Tomorrow.

N GANDHI ADVANCE ENGINEERING PRIVATE LIMITED.
An ISO 9001:2015 Certified Company

STAINLESS STEEL CABLE TIES

N-LOC™
STAINLESS STEEL CABLE TIES

Stainless Steel Cable Ties
Roller Ball Uncoated

- Self-locking design for fast and secure installation.
- Fully enclosed head prevents dirt or grit from interfering with locking mechanism.
- Smooth rounded edges for safe handling.
- Suitable for all types of cable insulation.
- Ideal for applications where corrosion, vibration, radiation or extremes of temperature are a concern.
- Fire proof for enhanced protection in demanding applications
- Packaged quantity in 100 no. per Bag.

Available in Grade
Stainless Steel
304/304L, 316/316L

Temperature Range
-60°C to +300°C

Surface Finish
Metallic - Uncoated

STAINLESS STEEL CABLE TIES ROLLER BALL UNCOATED - 4.6 MM WIDTH					
Part No.	**Width (mm)**	**Length (mm)**	**Thickness (mm)**	**Max Bundle Diameter (mm)**	**Minimum Loop Tensile strength (N)**
NBU46-100	4.6	100	0.25	18	445
NBU46-127	4.6	127	0.25	27	445
NBU46-150	4.6	150	0.25	34	445
NBU46-200	4.6	200	0.25	50	445
NBU46-250	4.6	250	0.25	66	445
NBU46-260	4.6	260	0.25	69	445
NBU46-300	4.6	300	0.25	82	445
NBU46-360	4.6	360	0.25	100	445
NBU46-400	4.6	400	0.25	114	445
NBU46-450	4.6	450	0.25	130	445
NBU46-520	4.6	520	0.25	151	445
NBU46-620	4.6	620	0.25	183	445
NBU46-680	4.6	680	0.25	203	445
NBU46-840	4.6	840	0.25	253	445
NBU46-1000	4.6	1000	0.25	304	445

STAINLESS STEEL CABLE TIES ROLLER BALL UNCOATED – 7.9 MM WIDTH					
Part No.	Width (mm)	Length (mm)	Thickness (mm)	Max Bundle Diameter (mm)	Minimum Loop Tensile strength (N)
NBU79-100	7.9	100	0.25	18	1112
NBU79-127	7.9	127	0.25	27	1112
NBU79-150	7.9	150	0.25	34	1112
NBU79-200	7.9	200	0.25	50	1112
NBU79-250	7.9	250	0.25	66	1112
NBU79-260	7.9	260	0.25	69	1112
NBU79-300	7.9	300	0.25	82	1112
NBU79-360	7.9	360	0.25	100	1112
NBU79-400	7.9	400	0.25	114	1112
NBU79-450	7.9	450	0.25	130	1112
NBU79-520	7.9	520	0.25	151	1112
NBU79-620	7.9	620	0.25	183	1112
NBU79-680	7.9	680	0.25	203	1112
NBU79-840	7.9	840	0.25	253	1112
NBU79-1000	7.9	1000	0.25	304	1112

N-LOC™
STAINLESS STEEL CABLE TIES

Stainless Steel Cable Ties
Roller Ball Coated

- Self-locking design for fast and secure installation.
- Fully enclosed head prevents dirt or grit from interfering with locking mechanism.
- Smooth rounded edges for safe handling.
- Suitable for all types of cable insulation.
- Fire proof for enhanced protection in demanding applications.
- Packaged quantity in 100 no. per Bag.

Available in Grade
Stainless Steel.
304/304L : 316/316L

Temperature Range
-60°C to +150°C

Surface Finish
Polyester and Nylon - Coated.

*Colour as per requirements

STAINLESS STEEL CABLE TIES ROLLER BALL COATED - 4.6MM WIDTH					
Part No.	**Width (mm)**	**Length (mm)**	**Thickness (mm)**	**Max Bundle Diameter (mm)**	**Minimum Loop Tensile strength (N)**
NBC46-100	4.6	100	0.25	18	445
NBC46-127	4.6	127	0.25	27	445
NBC46-150	4.6	150	0.25	34	445
NBC46-200	4.6	200	0.25	50	445
NBC46-250	4.6	250	0.25	66	445
NBC46-260	4.6	260	0.25	69	445
NBC46-300	4.6	300	0.25	82	445
NBC46-360	4.6	360	0.25	100	445
NBC46-400	4.6	400	0.25	114	445
NBC46-450	4.6	450	0.25	130	445
NBC46-520	4.6	520	0.25	151	445
NBC46-620	4.6	620	0.25	183	445
NBC46-680	4.6	680	0.25	203	445
NBC46-840	4.6	840	0.25	253	445
NBC46-1000	4.6	1000	0.25	304	445

STAINLESS STEEL CABLE TIES ROLLER BALL COATED – 7.9MM WIDTH					
Part No.	Width (mm)	Length (mm)	Thickness (mm)	Max Bundle Diameter (mm)	Minimum Loop Tensile strength (N)
NBC79-100	7.9	100	0.25	18	1112
NBC79-127	7.9	127	0.25	27	1112
NBC79-150	7.9	150	0.25	34	1112
NBC79-200	7.9	200	0.25	50	1112
NBC79-250	7.9	250	0.25	66	1112
NBC79-260	7.9	260	0.25	69	1112
NBC79-300	7.9	300	0.25	82	1112
NBC79-360	7.9	360	0.25	100	1112
NBC79-400	7.9	400	0.25	114	1112
NBC79-450	7.9	450	0.25	130	1112
NBC79-520	7.9	520	0.25	151	1112
NBC79-620	7.9	620	0.25	183	1112
NBC79-680	7.9	680	0.25	203	1112
NBC79-840	7.9	840	0.25	253	1112
NBC79-1000	7.9	1000	0.25	304	1112

N-LOC™
STAINLESS STEEL CABLE TIES

Stainless Steel Cable Ties
Roller Ball Heavy Duty Uncoated

- Self-locking design for fast and secure installation.
- Fully enclosed head prevents dirt or grit from interfering with locking mechanism.
- Smooth rounded edges for safe handling.
- Suitable for all types of cable insulation.
- Ideal for applications where corrosion, vibration, radiation or extremes of temperature are a concern.
- Fire proof for enhanced protection in demanding applications.
- Packaged quantity in 100 no. per Bag.

Available in Grade
Stainless Steel.
304/304L : 316/316L

Temperature Range
-60°C to +500°C

Surface Finish
Metallic - Uncoated.

STAINLESS STEEL CABLE TIES ROLLER BALL HEAVY DUTY UNCOATED - 12.7MM WIDTH					
Part No.	**Width (mm)**	**Length (mm)**	**Thickness (mm)**	**Max Bundle Diameter (mm)**	**Minimum Loop Tensile strength (N)**
NBU12-100	12.7	100	0.4	18	3115
NBU12-150	12.7	150	0.4	34	3115
NBU12-200	12.7	200	0.4	50	3115
NBU12-260	12.7	260	0.4	69	3115
NBU12-360	12.7	360	0.4	100	3115
NBU12-520	12.7	520	0.4	151	3115
NBU12-620	12.7	620	0.4	183	3115
NBU12-680	12.7	680	0.4	203	3115
NBU12-840	12.7	840	0.4	253	3115
NBU12-1000	12.7	1000	0.4	304	3115

STAINLESS STEEL CABLE TIES ROLLER BALL HEAVY DUTY UNCOATED - 16MM WIDTH					
Part No.	**Width (mm)**	**Length (mm)**	**Thickness (mm)**	**Max Bundle Diameter (mm)**	**Minimum Loop Tensile strength (N)**
NBU16-150	16.0	150	0.40	34	800
NBU16-200	16.0	200	0.40	50	800
NBU16-260	16.0	260	0.40	69	800
NBU16-360	16.0	360	0.40	100	800
NBU16-520	16.0	520	0.40	151	800
NBU16-620	16.0	620	0.40	183	800
NBU16-840	16.0	840	0.40	253	800
NBU16-1000	16.0	1000	0.40	304	800

N-LOC™
STAINLESS STEEL CABLE TIES

Stainless Steel Cable Ties
Roller Ball Heavy Duty Coated

- Self-locking design for fast and secure installation.
- Fully enclosed head prevents dirt or grit from interfering with locking mechanism.
- Smooth rounded edges for safe handling.
- Suitable for all types of cable insulation.
- Pure polyester coated.
- Fire proof for enhanced protection in demanding applications
- Packaged quantity in 100 no. per Bag.

Available in Grade
Stainless Steel.
304/304L : 316/316L

Temperature Range
-60°C to +150°C

Surface Finish
Polyester and Nylon - Coated.

*Colour as per requirements

STAINLESS STEEL CABLE TIES ROLLER BALL HEAVY DUTY COATED - 12.7MM WIDTH					
Part No.	**Width (mm)**	**Length (mm)**	**Thickness (mm)**	**Max Bundle Diameter (mm)**	**Minimum Loop Tensile strength (N)**
NBC12-100	12.7	100	0.4	18	3115
NBC12-150	12.7	150	0.4	34	3115
NBC12-200	12.7	200	0.4	50	3115
NBC12-260	12.7	260	0.4	69	3115
NBC12-360	12.7	360	0.4	100	3115
NBC12-520	12.7	520	0.4	151	3115
NBC12-620	12.7	620	0.4	183	3115
NBC12-680	12.7	680	0.4	203	3115
NBC12-840	12.7	840	0.4	253	3115
NBC12-1000	12.7	1000	0.4	304	3115

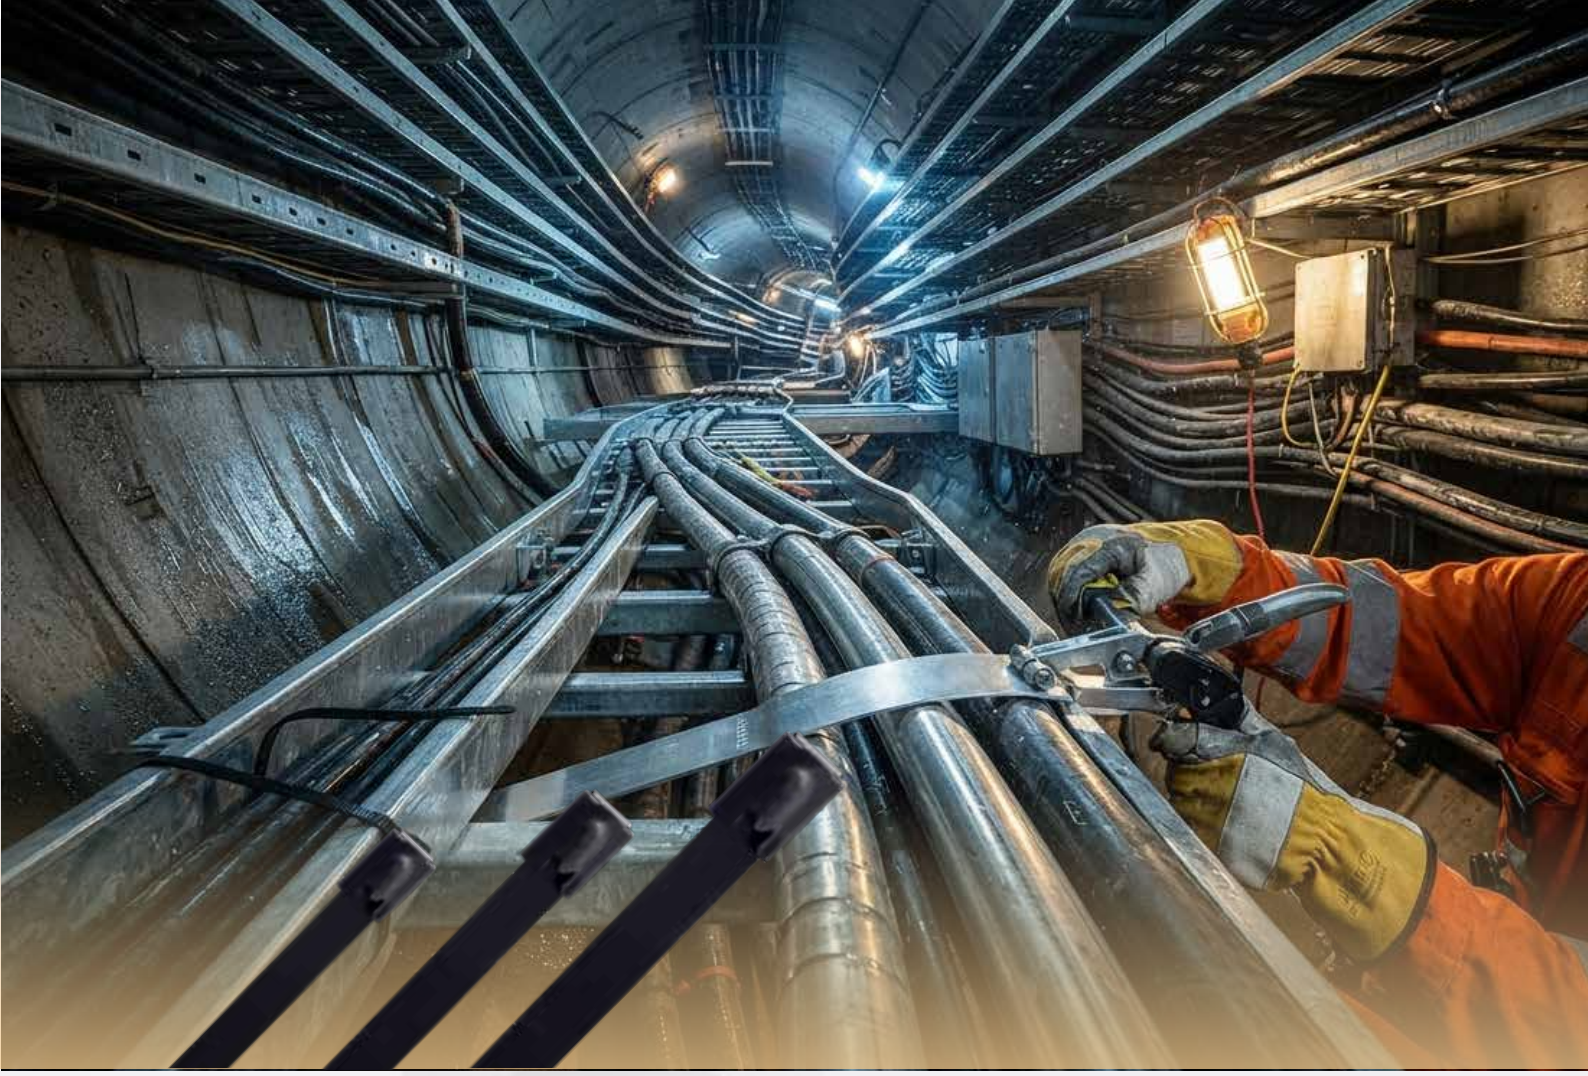

STAINLESS STEEL CABLE TIES ROLLER BALL HEAVY DUTY COATED - 16MM WIDTH					
Part No.	Width (mm)	Length (mm)	Thickness (mm)	Max Bundle Diameter (mm)	Minimum Loop Tensile strength (N)
NBC16-150	16.0	150	0.40	34	3560
NBC16-200	16.0	200	0.40	50	3560
NBC16-260	16.0	260	0.40	69	3560
NBC16-360	16.0	360	0.40	100	3560
NBC16-520	16.0	520	0.40	151	3560
NBC16-620	16.0	620	0.40	183	3560
NBC16-840	16.0	840	0.40	253	3560
NBC16-1000	16.0	1000	0.40	304	3560

N-LOC™
STAINLESS STEEL CABLE TIES

Stainless Steel Cable Ties
Releasable Cable Uncoated

- Releasable heads which can be reused many times over a long period of time.
- Smooth rounded edges for safe handling.
- Suitable for all types of cable insulation.
- Remains flexible at 60°C.
- Resistant to stress cracking on bending. (Elongation to break up to 800%)
- Excellent resistance to salt, sands, acids temperature variations and chemicals.
- Flame retardant and nontoxic.
- Water absorption free.
- Packaged quantity in 100 no. per Bag.

Available in Grade
Stainless Steel.
304/304L : 316/316L

Temperature Range
-80°C to +150°C

Surface Finish
Metallic - Uncoated.

STAINLESS STEEL CABLE TIES RELEASABLE CABLE UNCOATED - 6.35MM WIDTH					
Part No.	**Width (mm)**	**Length (mm)**	**Thickness (mm)**	**Max Bundle Diameter (mm)**	**Tensile strength (N)**
NRU66-152	6.35	152	0.90	34	2000
NRU66-229	6.35	229	0.90	59	2000
NRU66-305	6.35	305	0.90	91	2000
NRU66-457	6.35	457	0.90	129	2000
NRU66-610	6.35	610	0.90	177	2000
NRU66-762	6.35	762	0.90	225	2000
NRU66-914	6.35	914	0.90	273	2000

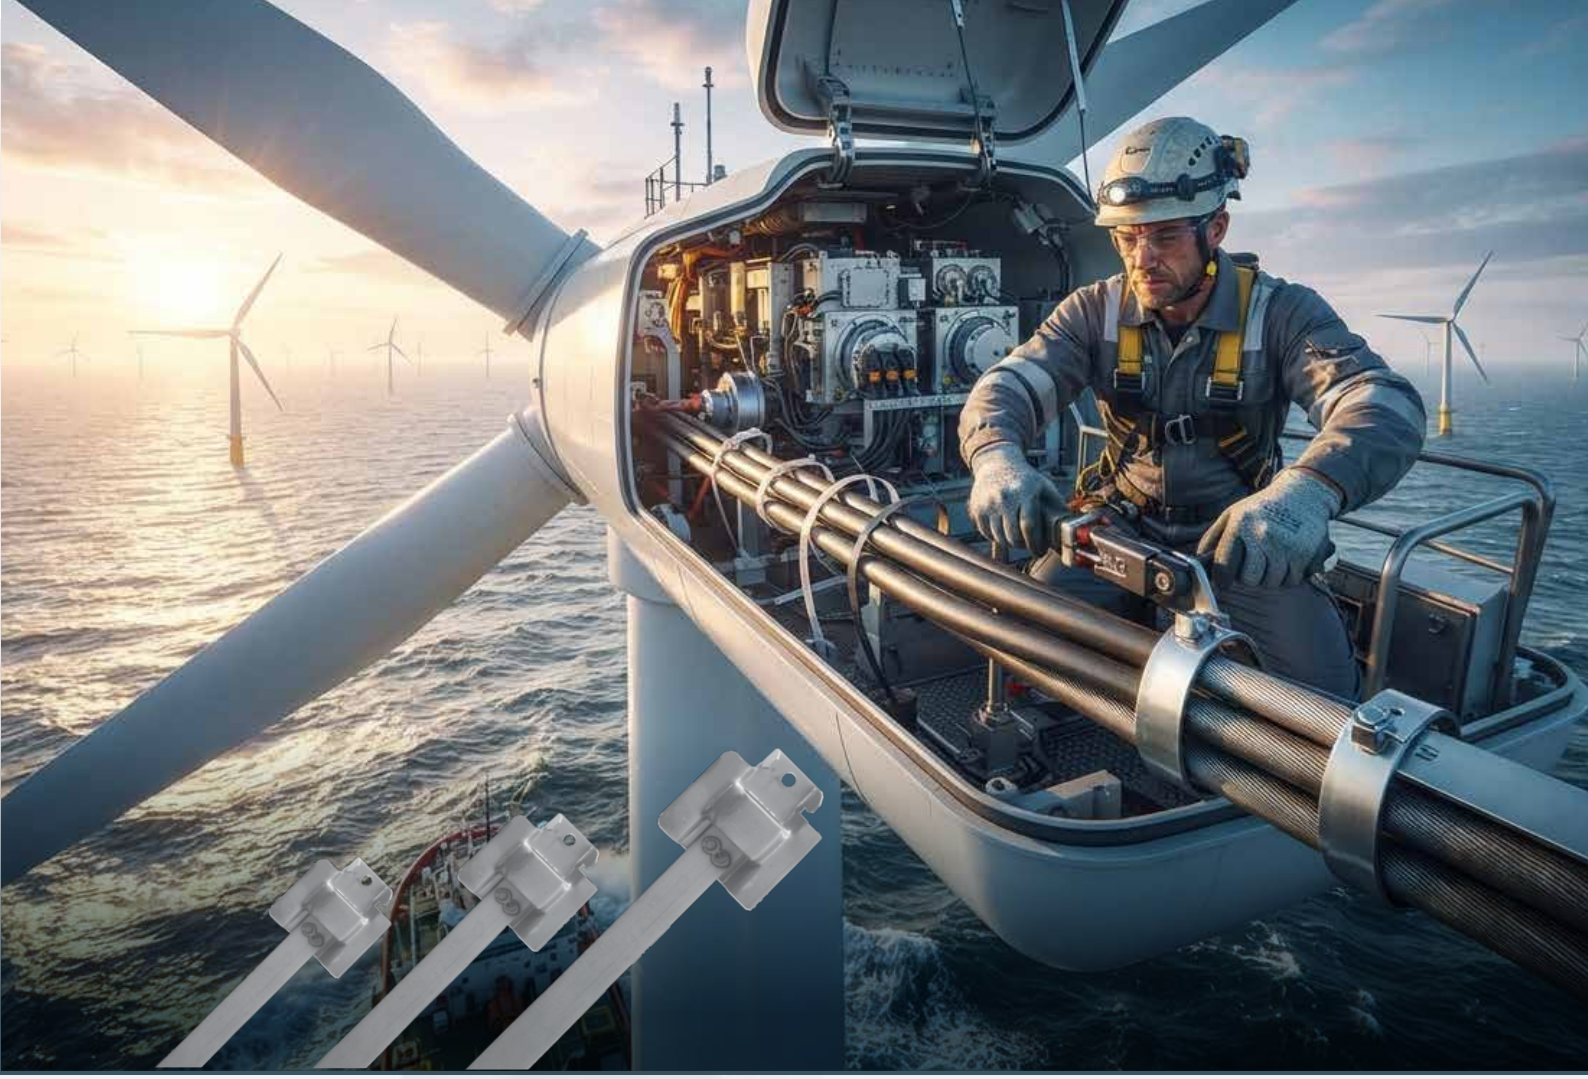

STAINLESS STEEL CABLE TIES RELEASABLE CABLE UNCOATED - 9.35MM WIDTH					
Part No.	**Width (mm)**	**Length (mm)**	**Thickness (mm)**	**Max Bundle Diameter (mm)**	**Minimum Loop Tensile strength (N)**
NRU96-152	9.35	152	0.90	34	2000
NRU96-229	9.35	229	0.90	59	2000
NRU96-305	9.35	305	0.90	91	2000
NRU96-457	9.35	457	0.90	129	2000
NRU96-610	9.35	610	0.90	177	2000
NRU96-762	9.35	762	0.90	225	2000
NRU96-914	9.35	914	0.90	273	2000

*Thickness includes coating Base material thickness 0.5mm

N-LOC™
STAINLESS STEEL CABLE TIES

Stainless Steel Cable Ties
Releasable Cable Coated

- Releasable heads which can be reused many times over a long period of time.
- Smooth rounded edges for safe handling.
- Suitable for all types of cable insulation.
- Surface coating PPA571.
- Designed to provide a long-lasting coating for exterior applications.
- Remains flexible at 60°C.
- Resistant to stress cracking on bending. (Elongation to break up to 800%)
- Excellent resistance to salt, sands, acids temperature variations and chemicals.
- Flame retardant and nontoxic.
- Water absorption free.
- Packaged quantity in 100 no. per Bag.

Available in Grade
Stainless Steel.
304/304L : 316/316L

Temperature Range
-60°C to +150°C

Surface Finish
PPA and Nylon - Coated.

*Colour as per requirements

STAINLESS STEEL CABLE TIES RELEASABLE CABLE COATED - 6.35MM WIDTH					
Part No.	**Width (mm)**	**Length (mm)**	**Thickness (mm)**	**Max Bundle Diameter (mm)**	**Tensile strength (N)**
NRCP66-152	6.35	152	0.50	34	1334
NRCP66-229	6.35	229	0.50	59	1334
NRCP66-305	6.35	305	0.50	91	1334
NRCP66-457	6.35	457	0.50	129	1334
NRCP66-610	6.35	610	0.50	177	1334
NRCP66-762	6.35	762	0.50	225	1334
NRCP66-914	6.35	914	0.50	273	1334

STAINLESS STEEL CABLE TIES RELEASABLE CABLE COATED - 9.53MM WIDTH					
Part No.	Width (mm)	Length (mm)	Thickness (mm)	Max Bundle Diameter (mm)	Minimum Loop Tensile strength (N)
NRCP96-152	9.53	152	0.90	34	2000
NRCP96-229	9.53	229	0.90	59	2000
NRCP96-305	9.53	305	0.90	91	2000
NRCP96-457	9.53	457	0.90	129	2000
NRCP96-610	9.53	610	0.90	177	2000
NRCP96-762	9.53	762	0.90	225	2000
NRCP96-914	9.53	914	0.90	273	2000

*Thickness includes coating Base material thickness 0.5mm

N-LOC™
STAINLESS STEEL CABLE TIES

Stainless Steel Cable Ties
Ladder Cable Uncoated

- Self-locking design for fast and secure installation.
- Smooth rounded edges for safe handling.
- Suitable for all types of cable insulation.
- Ideal for applications where corrosion, vibration, radiation or extremes of temperature are a concern.
- Fire proof for enhanced protection in demanding applications.
- Packaged quantity in 100 no. per Bag.

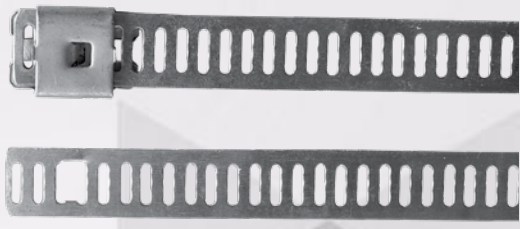

Available in Grade
Stainless Steel.
304/304L : 316/316L

Temperature Range
-60°C to +300°C

Surface Finish
Metallic - Uncoated.

STAINLESS STEEL CABLE TIES LADDER CABLE UNCOATED - 7MM WIDTH					
Part No.	**Width (mm)**	**Length (mm)**	**Thickness (mm)**	**Max Bundle Diameter (mm)**	**Tensile strength (N)**
NLU76-150	7.0	150	0.30	34	445
NLU76-200	7.0	200	0.30	50	445
NLU76-225	7.0	225	0.30	58	445
NLU76-250	7.0	250	0.30	66	445
NLU76-300	7.0	300	0.30	80	445
NLU76-360	7.0	360	0.30	99	445
NLU76-450	7.0	450	0.30	128	445
NLU76-600	7.0	600	0.30	176	445
NLU76-610	7.0	610	0.30	179	445
NLU76-750	7.0	750	0.30	224	445
NLU76-1000	7.0	1000	0.30	303	445

STAINLESS STEEL CABLE TIES LADDER CABLE UNCOATED - 12MM WIDTH					
Part No.	Width (mm)	Length (mm)	Thickness (mm)	Max Bundle Diameter (mm)	Minimum Loop Tensile strength (N)
NLU126-150	12	150	0.30	34	1112
NLU126-200	12	200	0.30	50	1112
NLU126-225	12	225	0.30	58	1112
NLU126-250	12	250	0.30	66	1112
NLU126-300	12	300	0.30	80	1112
NLU126-360	12	360	0.30	99	1112
NLU126-450	12	450	0.30	128	1112
NLU126-600	12	600	0.30	176	1112
NLU126-610	12	610	0.30	179	1112
NLU126-750	12	750	0.30	224	1112
NLU126-1000	12	1000	0.30	303	1112

N-LOC™
STAINLESS STEEL CABLE TIES

Stainless Steel Cable Ties
Ladder Cable Coated

- Self-locking design for fast and secure installation.
- Smooth rounded edges for safe handling.
- Suitable for all types of cable insulation.
- Pure Polyester coated.
- Ideal for applications where corrosion, vibration, radiation or extremes of temperature are a concern.
- Fire proof for enhanced protection in demanding applications.
- Packaged quantity in 100 no. per Bag.

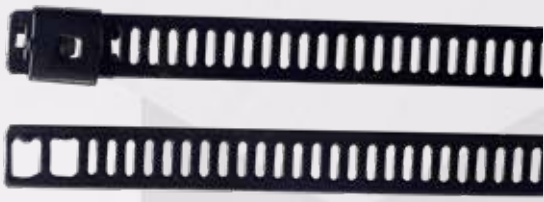

Available in Grade
Stainless Steel.
304/304L : 316/316L

Temperature Range
-60°C to +150°C

Surface Finish
Polyester and Nylon - Coated.

*Colour as per requirements

STAINLESS STEEL CABLE TIES LADDER CABLE COATED - 7MM WIDTH					
Part No.	**Width (mm)**	**Length (mm)**	**Thickness (mm)**	**Max Bundle Diameter (mm)**	**Tensile strength (N)**
NLC76-150	7.0	150	0.30	34	445
NLC76-200	7.0	200	0.30	50	445
NLC76-225	7.0	225	0.30	58	445
NLC76-250	7.0	250	0.30	66	445
NLC76-300	7.0	300	0.30	80	445
NLC76-360	7.0	360	0.30	99	445
NLC76-450	7.0	450	0.30	128	445
NLC76-600	7.0	600	0.30	176	445
NLC76-610	7.0	610	0.30	179	445
NLC76-750	7.0	750	0.30	224	445
NLC76-1000	7.0	1000	0.30	303	445

STAINLESS STEEL CABLE TIES LADDER CABLE COATED - 12MM WIDTH					
Part No.	Width (mm)	Length (mm)	Thickness (mm)	Max Bundle Diameter (mm)	Minimum Loop Tensile strength (N)
NLC76-150	12	150	0.30	34	1112
NLC76-200	12	200	0.30	50	1112
NLC76-225	12	225	0.30	58	1112
NLC76-250	12	250	0.30	66	1112
NLC76-300	12	300	0.30	80	1112
NLC76-360	12	360	0.30	99	1112
NLC76-450	12	450	0.30	128	1112
NLC76-600	12	600	0.30	176	1112
NLC76-610	12	610	0.30	179	1112
NLC76-750	12	750	0.30	224	1112
NLC76-1000	12	1000	0.30	303	1112

N-LOC™
STAINLESS STEEL CABLE TIES

CABLE MARKER TAG & IDENTIFICATION

KEY FEATURES

Permanent Identification

UV Resistant

Wide Temperature Range -80° C to +538° C

Corrosion Resistant

Indoor & Outdoor Use

Laser Marking Mechanical Stamping

Carrier Strips (Coated & Uncoated)

Stainless Steel (316/316L & 304/304L) Carrier Strips, Alphanumeric Characters, Marker Plates & Tags

CARRIER STRIPS (COATED & UNCOATED)						
Product Code (Uncoated)	**Product Code (Coated)**	**Material**	**Length (mm)**	**Width (mm)**	**Package Quantity**	**No. of Alphanumeric Characters**
NLU06	NLC06	316/316L 304/304L	92.5	8	100/Box	7
NLU10	NLC10	316/316L 304/304L	132.5	8	100/Box	12
NLU12	NLC12	316/316L 304/304L	152.5	8	100/Box	14
NLU16	NLC16	316/316L 304/304L	192.5	8	100/Box	19
NLU22	NLC22	316/316L 304/304L	252.5	8	100/Box	26

Alphanumeric Characters

- 316/316L & 304/304L stainless steel
- Easy to read in Dim light and hard-to-reach places
- Full range of individual letters, numbers and symbols
- Fitted onto a variety of **N-LOC** cable ties
- Slides directly onto cable ties to form a self contained wrap tag
- Carrier Strips let you build your own carrier, in multiple colours, for identification

ALPHANUMERIC CHARACTERS			
Type	**Range**	**Remark**	**Packaging**
Alphabet	NLA to NLZ	All 26 alphabets available	100/bag
Numeric	NL 0 to NL 9	All 26 alphabets available	100/bag
Special Characters	>< ± / & + - ~	Blank Tag Also available	100/bag

Marker Plates & Tags

Stainless steel (316/316L & 304/304L) carrier strips, alphanumeric characters, marker plates & tags

Identify pipes, conduit, valves, cables and equipment in refineries, petrochemical plants, pulp and paper mills, offshore rigs and other harsh environments

Every plate and tag can be custom marked by N LOC on computer-controlled laser or embossing systems, giving permanent identification that resists corrosion and abrasion.

Packaged quantity in 100 nos. per bag.

MARKER PLATES & TAGS									
Product Code	**Material Grade**	**Length (mm)**	**Width (mm)**	**Package Quantity**	**Used with Cable Ties**	**Characters**	**Character Height**	**Metal Embossing**	**Laser Etching Details**
NL7407	316/316L 304/304L	74	7	100/Box	4.6mm	Single Line - Multiple Characters	-	-	✓
NL8909	316/316L 304/304L	89	9.5	100/Box	4.6mm & 7.9 mm	Single Line - Multiple Characters	3mm & 4mm	✓	✓
NL5019	316/316L 304/304L	50	19	100/Box	4.6mm	Three Lines - Multiple Characters	3mm & 4mm	✓	✓
NL8919	316/316L 304/304L	89	19	100/Box	4.6mm	Three Lines - Multiple Characters	3mm & 4mm	✓	✓
NL6338	316/316L 304/304L	63	38	100/Box	4.6mm	Five Lines - Multiple Characters	3mm & 4mm	✓	✓

Laser Marking System

- Used on all stainless steel cable ties, strapping and metal marker plates/tags
- Bold block letters
- Upper and lower case characters
- Alphanumeric and sequential numbering

Embossing System

- Used on metal marker plates and tags up to 0.5 mm thick
- Suited to applications exposed to occasional painting and heavy dirt
- Upper case “raised” characters only
- Alphanumeric and sequential numbering

N-LOC™
STAINLESS STEEL CABLE TIES

Additional Tag Types - Cable, Pipe & Equipment Identification

Round Tag
With Hole

Round Tag
2 Holes

Oval Tag
2 Holes



Square Tag
4 Holes



Wrap Around Tag
Curved Ends



PIPE / CONDUIT TAG
2 Holes



FLAG TYPE TAG
Cable Identification



VALVE TAG
Round With Ring

LARGE EQUIPMENT TAG
2 Holes

DUAL CABLE MARKER TAG
Two Cables

NARROW MINI TAG
Small Cables



HEAT SHRINK INSERT TAG
SS Sleeve

CLIP-ON TAG
Reusable

TIE-ON TAG
With Hole



LONG NARROW TAG
Extended Identification

CUSTOM SHAPE TAG
As Per Requirement

N-LOC™
STAINLESS STEEL CABLE TIES

APPLICATION

Control Panels

Solar PV Industries

Wind Turbine

Ship Building

Cable Cleats

PREMIUM QUALITY
High-quality materials for secure cable support and protection.

SUPERIOR STRENGTH
Engineered for secure cable retention under demanding loads.

Secure Cable Fixing

Mechanical Protection

Durable Performance

Secure cable management built for reliable performance.

Hold Strong. Move Forward.

N GANDHI ADVANCE ENGINEERING PRIVATE LIMITED.
An ISO 9001:2015 Certified Company

CABLE CLEATS

CABLE CLEATS

FEATURES & SPECIFICATIONS

NAEPL's Cable Cleats are designed to securely hold and support your cables within the cable tray system under all operating conditions. More importantly, they protect the installation during a short circuit. Short circuits are an unfortunate reality, and when one occurs, the resulting electromagnetic forces can be destructive and dangerous to both the cables and the wider cable system. Cable cleats act as one of the first lines of defence, helping to safeguard personnel, cables and the entire cable system.

Construction of the Cable Cleats

The cable cleats are made of a composite material and are supported by a metallic frame of 50 mm × 2.1 mm, manufactured from marine-grade, non-magnetic 316L stainless steel. For closure, 316L stainless steel bolts of size M8, M10 or M12 are used along with nylon lock nuts, ensuring a secure and corrosion-resistant fit. The integral pad is made of a low smoke, low fume and halogen-free material, which makes the cleats suitable for use in enclosed and safety-critical installations. Installation requires only a wrench, and the mounting bolt is provided along with each cable cleat.

Performance of the Cable Cleats

The cable cleats are tested for their ability to withstand electromechanical forces caused by short-circuit conditions. Using a test cable with an outer diameter of 35 mm, they withstand a peak current of 180 kA at 300 mm spacing (Clause 9.5.2) and 125 kA at 600 mm spacing (Clause 9.5.3). In the lateral load test, they achieve an average of 25 kg, and they pass the axial load test.

The cleats operate reliably across a temperature range of -40°C to +60°C and have a very heavy resistance to impact. They also withstand the needle flame test for 30 seconds and show resistance to UV light exposure for 1000 hours, making them suitable for both indoor and outdoor applications.

How to select Cable Cleats?

1. Know the Cable

- Which type of cable is being used, Single or Multi-Conductor?
- What is the outer diameter of the cable(s)?
- What is the available short-circuit current (RMS or Peak) of the cable?
- If a ground w ire is installed in the cleats, know the outer diameter of the ground wire.

Single Conductor Short Circuit Withstand Table																					
Max. Cable Cleat Spacing (A)		**Spacing Between Conductor Centers (mm).**																			
		23	25	27	29	31	33	35	37	39	41	43	45	47	49	51	53	55	57	59	61
mm	In.	**IP Peak (KA)**																			
225	8.858	168	175	182	189	195	201	207	213	219	224	230	235	240	245	250	255	260	265	269	274
300	11.81	145	152	158	163	169	174	180	185	190	194	199	204	208	212	217	221	225	229	233	237
450	17.72	119	124	129	133	138	142	146	151	155	159	162	166	170	173	177	180	184	187	190	194
600	23.62	103	107	111	115	119	123	127	130	134	137	141	144	147	150	153	156	159	162	165	168
675	26.57	97	101	105	109	112	116	119	123	126	129	133	136	139	141	144	147	150	153	155	158
900	35.43	84	87	91	94	97	100	103	106	109	112	115	117	120	122	125	127	130	132	134	137

Trefoil Cable Cleats

Part Number	Min. Dia.		Mid Dia.		Max Dia.		H		W	
	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.
NCC-T1823	18	0.71	20	0.79	23	0.91	79	3.11	82	3.23
NCC-T2328	23	0.91	25	0.98	28	1.1	84	3.31	93	3.66
NCC-T2732	27	1.06	29	1.14	32	1.26	91	3.58	99	3.9
NCC-T3035	30	1.18	33	1.3	35	1.38	96	3.78	103	4.06
NCC-T3338	33	1.3	35	1.38	38	1.5	101	3.98	107	4.21
NCC-T3642	36	1.42	38	1.5	42	1.65	107	4.21	113	4.45
NCC-T4046	40	1.57	44	1.73	46	1.81	114	4.49	119	4.69
NCC-T4450	44	1.73	47	1.85	50	1.97	121	4.76	126	4.96
NCC-T4855	48	1.89	51	2.01	55	2.17	129	5.08	137	5.39
NCC-T5158	51	2.01	53	2.09	58	2.28	134	5.28	143	5.63
NCC-T5562	55	2.17	57	2.24	62	2.44	141	5.55	152	5.98
NCC-T5966	59	2.32	64	2.52	66	2.6	148	5.83	161	6.34
NCC-T6370	63	2.48	65	2.56	70	2.76	155	6.1	169	6.65
NCC-T6774	67	2.64	69	2.72	74	2.91	161	6.34	178	7.01
NCC-T7178	71	2.8	73	2.87	78	3.07	168	6.61	186	7.32
NCC-T7482	74	2.91	76	2.99	82	3.23	175	6.89	195	7.68
NCC-T7785	77	3.03	80	3.15	85	3.35	180	7.09	202	7.95
NCC-T8288	82	3.23	84	3.31	88	3.46	185	7.28	208	8.19
NCC-T8896	88	3.46	92	3.62	96	3.78	199	7.83	225	8.86
NCC-T96103	96	3.78	100	3.94	103	4.06	210	8.27	240	9.45
NCC-T103111	103	4.06	107	4.21	111	4.37	224	8.82	258	10.16
NCC-T111119	111	4.37	115	4.53	119	4.69	237	9.33	275	10.83
NCC-T119128	119	4.69	124	4.88	128	5.04	253	9.96	295	11.61

Single Cable Cleats

Part Number	Min. Dia.		Mid. Dia.				Max. Dia.		H		W	
	mm	In.	mm	In.	Mm	In,	mm	In.	mm	In.	mm	In.
NCC-S3239	32	1.26	35	1.38	/	/	39	1.54	74	2.91	81	3.19
NCC-S3745	37	1.46	40	1.57	/	/	45	1.77	77	3.03	88	3.46
NCC-S4452	44	1.73	47	1.85	/	/	52	2.05	83	3.27	94	3.7
NCC-S5159	51	2.01	54	2.13	/	/	59	2.32	87	3.43	102	4.02
NCC-S5866	58	2.28	61	2.4	/	/	66	2.6	91	3.58	110	4.33
NCC-S6573	65	2.56	68	2.68	/	/	73	2.87	97	3.82	116	4.57
NCC-S7385	73	2.87	75	2.95	79	3.11	85	3.35	101	3.98	131	5.16
NCC-S8494	84	3.31	86	3.39	90	3.54	94	3.7	110	4.33	140	5.51
NCC-S94118	94	3.7	98	3.86	106	4.17	118	4.65	134	5.28	163	6.42
NCC-S118130	118	4.65	120	4.72	124	4.88	130	5.12	146	5.75	175	6.89
NCC-S127150	127	5	131	5.16	139	5.47	150	5.91	166	6.54	195	7.68

LINKBOX™

STRONG CONNECTIONS. SAFE SYSTEMS

PREMIUM QUALITY
High-grade stainless steel, aluminium and other suitable materials for durable protection

SUPERIOR PROTECTION
Robust construction for reliable industrial and outdoor protection.

Weather Resistant

Corrosion Resistant

UV & Temperature Resistant

Secure protection for electrical connections in demanding environments.

Built to Protect. Designed to Connect.

N GANDHI ADVANCE ENGINEERING PRIVATE LIMITED.
An ISO 9001:2015 Certified Company

JUNCTION BOX

LINKBOX™
STRONG CONNECTIONS. SAFE SYSTEMS

Aluminium Die Cast

FEATURES & SPECIFICATIONS

BUILT TO LAST
Die-cast corrosion-resistant aluminium alloy, grade ENAC/GBDAlSi12(Fe) to DIN EN 1706.

TOUGH UNDER IMPACT
Tested and certified to withstand impacts of up to IK09 Joules, per IS/EN 60079-0:2007 and EN 60079.

WEATHER & SALT PROOF
Withstands more than 1000 hours of salt spray/mist exposure. Tested and certified to ASTM B117 and IS 9000 Part XI.

CONCEALED MOUNTING
Mounts through inner holes, so the enclosure's ingress protection stays intact.

INGRESS PROTECTION – IP
IP66 standard protection, with IP67 and IP68 available on demand, tested and certified in accordance with IS/EN 60529:2001 and DIN EN 60529.

SECURE FASTENING
- Stainless steel SS304/A2 captive lid screws that won't get lost during maintenance.
- Copper-coated steel earth screws with an integral spring washer for reliable grounding.

RELIABLE SEALING
One-piece compression-moulded gasket in Silicon/Neoprene.

REACH COMPLIANT
Tested and compliant for SVHC under Article 57 and Article 33(1) of REACH Regulation EC 1907/2006.

RoHS COMPLIANT
Tested and compliant under Annexure II of Commission Regulation (EU) No. 65/2011.

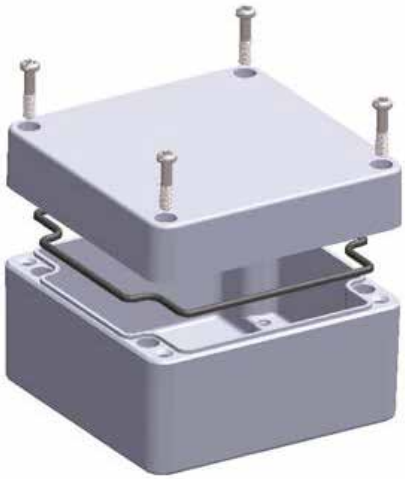

STANDARD ENCLOSURE KIT
LID
BASE
GASKET
MOUNTING SCREWS
EARTH SCREWS



SCREW OPTIONS
PAN COMBI HEAD, TORX HEAD, ALLEN HEAD, CHEESE HEAD

GASKET OPTIONS
NEOPRENE : -40°C to +130°C
SILICON : -60°C to +200°C
EMI/RFICONDUCTIVE GASKET on request

CERTIFICATIONS & COMPLIANCE

STANDARD COLOURS

NATURAL ALUMINIUM

RAL 7001 SILVER GRAY

RAL 9005 BLACK

CUSTOM COLOURS


ANY RAL SHADE SPECIAL REQUEST

OUR SERVICES

- HELP SELECTING THE RIGHT ENCLOSURE
- CUSTOM MACHINING SERVICE
- PROJECT PLANNING SERVICE
- PROTOTYPING
- ASSEMBLY SERVICE
- SAMPLE SERVICE
- PRINING SERVICE
- SPECIAL PACKAGING
- CUSTOM DESIGN PRODUCT MANUFACTURE
- WARHOUSING FOR 'JIT' DELIVERY
- EXPRESS PROCESSING AND DELIVERY SERVICE

ACCESSORIES

DIN RAILS: T15 OR T35

CABLE CLANDS

INTERNAL MOUNTING PLATES

WALL MOUNT BRACKETS

EXTERNAL MOUNT HINGES

Custom cut-outs
Windows, display openings and connector slots in any shape.

Threaded holes
Tapped to your thread size for cable glands and fixings

Facing and milling
Flat, machined seats for gaskets, panels and mounting plates

Powder coating
Durable finish in any RAL or custom colour

Printing
Logos, labels and legends printed directly on the enclosure.

Custom branding
Your name and mark on the lid, engraved or embossed

Clinch stud fixing
Permanent studs pressed in for mounting boards and earthing

Insert fitting
Self-tapping inserts for strong, reusable threads in thin walls

Assembly
Delivered fully assembled, wired or fitted, ready to install.

CUSTOM ENCLOSURES

Stainless Steel Enclosures

Die Cast Push Button Station Exclosures

Housing Enclosures With Integral Inserts

Enclosures For Limit Switches

Fibre Optic Telecommucation Enclosures

Any Kind Of Die Cast Housing Or Enclosure

Heavy Machinery Equipment Junction Boxes

LINKBOX™
STRONG CONNECTIONS. SAFE SYSTEMS

Heavy Duty Aluminium Die Cast Enclosure

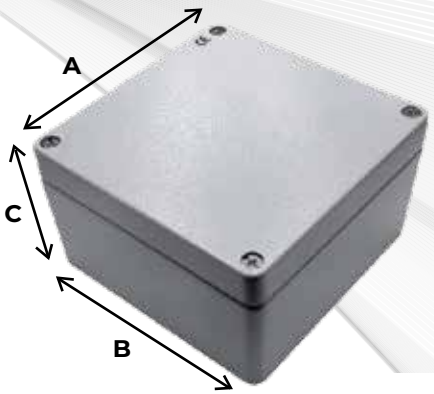

A = WIDTH
B = LENGTH
C = HEIGHT

Part Model No.	Width A	Length B	Height C	Internal Mounting Plate	DIN Rail		External Hinges Set	External Mounting Bracket Set
	(mm)	(mm)	(mm)		T15	T35		
NLB-ALE-001	45	50	30	-	-	-	-	-
NLB-ALE-002	64	58	34	✓	-	-	-	-
NLB-ALE-003	64	98	34	✓	-	-	-	-
NLB-ALE-004	64	150	34	✓	-	-	-	✓
NLB-ALE-005	80	75	57	✓	✓	-	-	✓
NLB-ALE-006	80	125	57	✓	✓	-	-	✓
NLB-ALE-007	80	175	57	✓	✓	-	-	✓
NLB-ALE-008	80	200	60	✓	✓	-	-	✓
NLB-ALE-009	80	250	57	✓	✓	-	-	✓
NLB-ALE-010	100	100	81	✓	✓	-	-	✓
NLB-ALE-011	100	160	81	✓	✓	-	-	✓
NLB-ALE-012	100	200	81	✓	✓	-	-	✓
NLB-ALE-013	120	122	81	✓	✓	✓	-	✓
NLB-ALE-014	120	122	91	✓	✓	✓	-	✓
NLB-ALE-015	120	220	81	✓	✓	✓	-	✓
NLB-ALE-016	120	220	91	✓	✓	✓	-	✓
NLB-ALE-017	120	360	81	✓	✓	✓	-	✓
NLB-ALE-018	140	140	91	✓	✓	✓	✓	✓
NLB-ALE-019	140	200	91	✓	✓	✓	✓	✓
NLB-ALE-020	160	160	91	✓	✓	✓	✓	✓
NLB-ALE-021	160	260	91	✓	✓	✓	✓	✓
NLB-ALE-022	160	260	160	✓	✓	✓	✓	✓
NLB-ALE-023	160	360	91	✓	✓	✓	✓	✓
NLB-ALE-024	180	180	101	✓	✓	✓	✓	✓
NLB-ALE-025	232	202	111	✓	✓	✓	✓	✓
NLB-ALE-026	232	202	181	✓	✓	✓	✓	✓
NLB-ALE-027	230	280	111	✓	✓	✓	✓	✓
NLB-ALE-028	230	330	111	✓	✓	✓	✓	✓
NLB-ALE-029	310	400	181	-	-	-	✓	✓

LINKBOX™
STRONG CONNECTIONS. SAFE SYSTEMS

Mild Steel Junction Box

Lift-Off Cover | Clamp-Secured Design

Engineered for use as instrument enclosures, electrical, hydraulic, or pneumatic control housings, junction boxes, and terminal wiring enclosures. Provides dependable protection against falling dirt, dust, oil, and water.

CONSTRUCTION FEATURES

Feature	Specification
Body Material	16- or 14-gauge steel
Cover Material	14-gauge steel
Seams	Smooth, continuously welded; no knockouts, cutouts, or holes
Mounting	Externally welded mounting brackets
Cover Fastening	Stainless steel clamps with plated steel screws
Cover Retention	Plated chain keeps cover attached when open
Gasket	Seamless, poured-in-place
Inner Panel	Removable 14-gauge panel included on models larger than 4” x 4”
Panel Mounting	Internal threaded weld studs
Bonding / Grounding	Bonding stud on door; grounding stud on enclosure

Finish

Component	Finish
Enclosure & Cover	Phosphatized, with ANSI 61 gray recoatable powder coat

Removable Inner Panel White powder coat

Accessories

No.	Accessory
1	Additional Inner Panels
2	Terminal Kit Assemblies
3	Swing Panel Kit
4	Door Clamping Hardware
5	Climate Control Solutions
6	General Accessories

Specifications are subject to change without notice.
Refer to the product drawing for dimensional details.

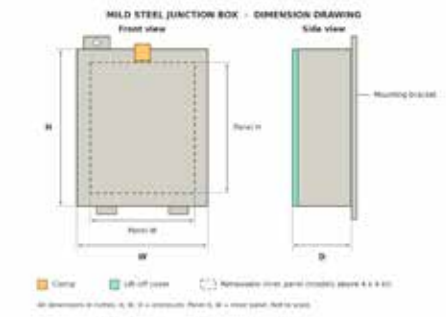

Part Model No.	Enclosure			Panel	
	H	W	D	H	W
NLB-MSJ-001	4.00	4.00	3.00	—	—
NLB-MSJ-002	6.00	4.00	3.00	4.88	2.88
NLB-MSJ-003	8.00	6.00	3.50	6.75	4.88
NLB-MSJ-004	4.00	4.00	4.00	—	—
NLB-MSJ-005	6.00	4.00	4.00	4.88	2.88
NLB-MSJ-006	6.00	6.00	4.00	4.88	4.88
NLB-MSJ-007	10.00	8.00	4.00	8.75	6.88
NLB-MSJ-008	12.00	10.00	5.00	10.75	8.88
NLB-MSJ-009	14.00	12.00	6.00	12.75	10.88
NLB-MSJ-010	16.00	14.00	6.00	14.75	12.88
NLB-MSJ-011	14.00	12.00	8.00	12.75	10.88
NLB-MSJ-012	16.00	14.00	10.00	14.75	12.88

SS Junction Boxes

Stainless Steel Watertight Junction Boxes designed for reliable electrical protection in demanding environments, including food processing, naval, chemical, and petrochemical industries. The range comprises low-voltage junction boxes available in various sizes and configurations, with customizable accessories and precision machining options to meet specific installation and application requirements.

TECHNICAL CHARACTERISTICS

Parameter	Specification
Construction Material	Stainless Steel AISI 304 / WNr. 1.4301
Material Options	AISI 316 / WNr. 1.4404 available on request
Surface Finish	Scotch-Brite
Material Thickness	From 1.2 mm
Enclosure Construction	Single piece bent and continuously welded construction with M5 blind bushes for wall mounting without additional machining
Door & Sealing System	Polyurethane perimeter gasket with operating temperature range of -40°C to +90°C, fitted with cross pan-head captive screws
Fastener Options	Alternative screw-head configurations available on request
Standard Accessories	Earthing accessories and cardboard packaging
Customization & Machining	Drilling and machining as per customer drawings, including customized and application-specific solutions
Available Accessories	Wall mounting brackets, mounting plates, DIN rail supports, and mounting screws

LINKBOX™
STRONG CONNECTIONS. SAFE SYSTEMS

TECHNICAL DRAWING

Parameter	Width	Height	Depth
Junction Box Dimension	**B**	**H**	**P**
Centreline Distance Between Rear Mounting Holes	B1	H1	—
Cover Drilling Area	B2	H2	—
Enclosure Drilling Area	B3	H3	P3

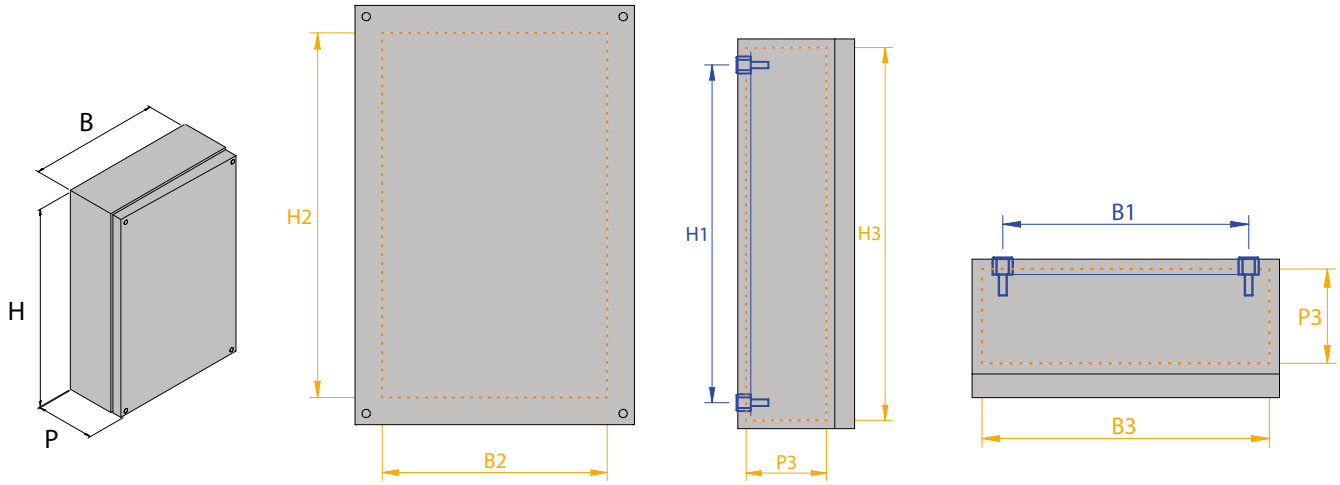

DIMENSION TABLE

Part Model No.	Width B	Length H	Height P	Weight	DRILLING AREA					REAR BUSHING CENTRE DISTANCE		
					B2	H2	B3	H3	P3	N°*	H1	H2
	(mm)	(mm)	(mm)	(Kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(Pz)	(mm)	(mm)
NLB-SSJ-001	100	100	90	1.1	61	61	82	82	54	2	50	60
NLB-SSJ-002	100	150	90	1.3	61	111	82	132	54	2	50	110
NLB-SSJ-003	100	200	90	1.5	61	161	82	181	54	2	50	160
NLB-SSJ-004	150	150	90	1.5	111	111	132	131	54	2	75	110
NLB-SSJ-005	150	150	120	2	111	111	132	130	84	2	75	110
NLB-SSJ-006	150	200	90	1.8	111	161	132	181	54	2	75	160
NLB-SSJ-007	150	300	90	2.3	111	261	132	280	54	2	75	260
NLB-SSJ-008	200	200	90	2.1	161	161	182	180	54	4	160	160
NLB-SSJ-009	200	200	120	2.6	161	161	182	179	84	4	160	160
NLB-SSJ-010	200	300	90	2.7	161	261	182	279	54	4	160	260
NLB-SSJ-011	200	300	120	3.2	161	261	182	278	84	4	160	260
NLB-SSJ-012	200	400	120	3.9	161	361	182	377	84	4	160	360
NLB-SSJ-013	250	350	120	4	211	311	232	326	84	4	210	310
NLB-SSJ-014	300	300	120	4.1	261	261	282	276	84	4	260	260
NLB-SSJ-015	300	400	120	4.9	261	361	282	375	84	4	260	360

SS JUNCTION BOX ACCESSORIES

A range of accessories is available for the SS Junction Boxes to facilitate easy installation, mounting, and internal component arrangement. Available accessories include wall mounting brackets, internal mounting plates, DIN rail supports, cable entry plates, and mounting screws.

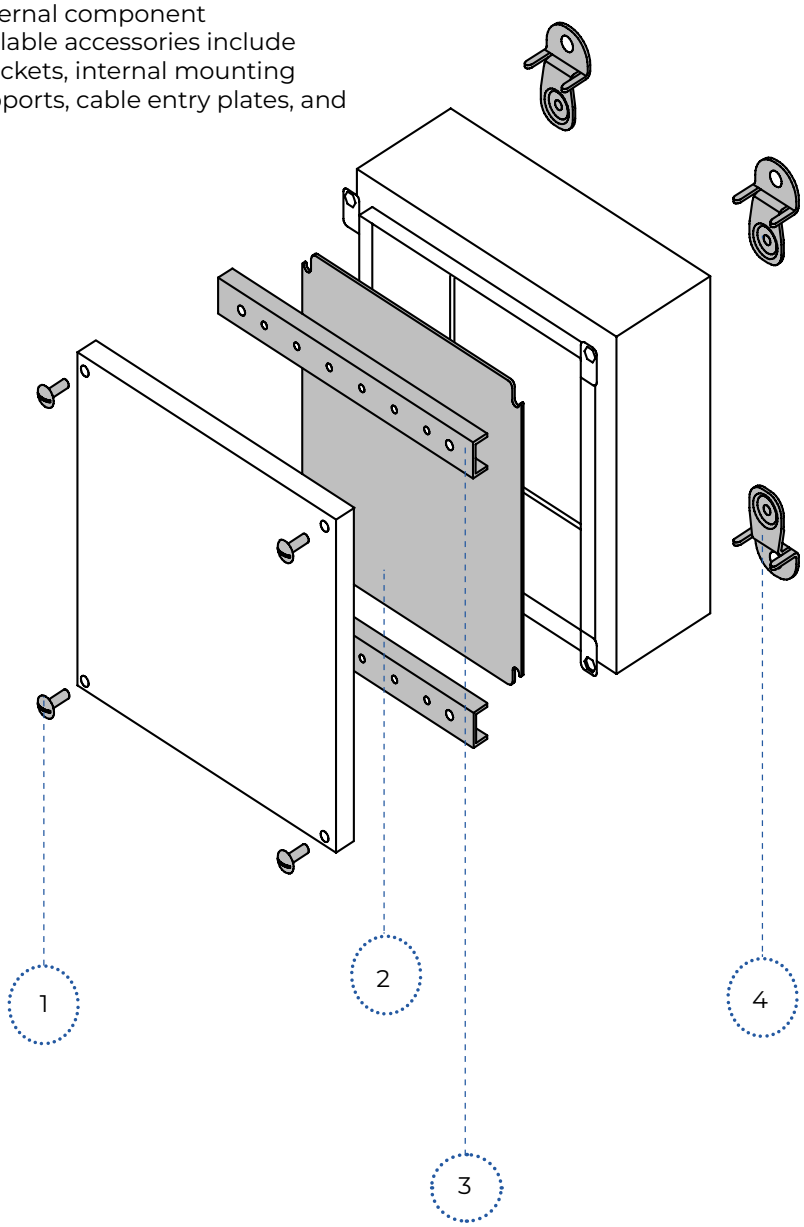

1. SCREWS

Description: Set of M5 screws with different heads to use as alternatives to standard.
Material: stainless steel.
Quantity: see below.
Installation: By customer.

No.	Description	Code	Pack (Pcs.)
1	CROSS PAN HEAD SCREW	NLB-SCR-001	10
2	SLOTTED PAN HEAD SCREW	NLB-SCR-002	10
3	HEX HEAD SCREW	NLB-SCR-003	10
4	BUTTON HEAD HEX SOCKET SCREW	NLB-SCR-004	10
5	CAPTIVE WASHER D. 5 mm	NLB-SCR-005	10



2. MOUNTING PLATE

Description: Cable entry plate.
Material: Galvanised sheet metal.
Quantity: See below.
Installation: By customer.



Enclosure		Code	Weight (Kg)	Mounting Plate		Pack (Pcs.)
B (mm)	H (mm)			Bp (mm)	Hp (mm)	
150	150	**NLB-MP-001**	0.3	97	120	1
150	200	**NLB-MP-002**	0.5	97	170	1
150	300	**NLB-MP-003**	0.7	97	270	1
200	200	**NLB-MP-004**	0.6	147	170	1
200	300	**NLB-MP-005**	1	147	270	1
200	400	**NLB-MP-006**	1.3	147	370	1
250	350	**NLB-MP-007**	1.4	197	320	1
300	300	**NLB-MP-008**	1.5	247	270	1
300	400	**NLB-MP-009**	2	247	370	1

3. SUPPORTS FOR DIN GUIDES

Description: Bottom profile for installing DIN guides.
Material: Galvanised sheet metal.
Quantity: See below.
Installation: By customer.



Enclosure		Code	Weight (Kg)	Mounting Plate		Pack (Pcs.)
B (mm)	H (mm)			Bp (mm)	Hp (mm)	
150	150	**NLB-MP-001**	0.3	97	120	1
150	200	**NLB-MP-002**	0.5	97	170	1
150	300	**NLB-MP-003**	0.7	97	270	1
200	200	**NLB-MP-004**	0.6	147	170	1
200	300	**NLB-MP-005**	1	147	270	1
200	400	**NLB-MP-006**	1.3	147	370	1
250	350	**NLB-MP-007**	1.4	197	320	1
300	300	**NLB-MP-008**	1.5	247	270	1
300	400	**NLB-MP-009**	2	247	370	1

4. WALL BRACKETS

Description: A: Multiple drilled brackets for wall mounting.
B: Multiple drilled wall mounting brackets with grounding system.
Material: AISI 316 / Wnr 1.4404 stainless steel.
Quantity: Pack of 2 with mounting screws.
Installation: by customer

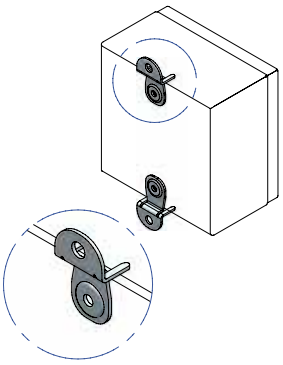

Description	Material	LinkBox Code	Pack (Pcs.)
WALL MOUNTING BRACKET SET	AISI 316 (W.Nr. 1.4404)	**NLB-WMB-001**	2
WALL MOUNTING BRACKET SET WITH GROUNDING SYSTEM	AISI 316 (W.Nr. 1.4404)	**NLB-WMB-002**	2

SS JUNCTION BOXES PUSH BUTTON PANEL

Watertight stainless-steel push-button panels designed for reliable performance in demanding environments, including **food processing, pharmaceutical, petrochemical, and naval industries.** The range features low-voltage enclosures that can be customized with a variety of accessories, cut-outs, drilling, and special machining to meet specific application and installation requirements

TECHNICAL SPECIFICATIONS & CONFIGURATION OPTIONS

Parameter	Specification
Construction Material	Stainless Steel AISI 304 / WNr. 1.4301
Material Options	Stainless Steel AISI 316 / WNr. 1.4404 available on request
Surface Finish	Scotch-Brite
Material Thickness	From 1.2 mm
Enclosure Construction	Single piece bent and continuously welded construction with M5 blind bushes for wall mounting without additional machining
Door Sealing	Polyurethane perimeter gasket with an operating temperature range of -40°C to +90°C
Cover Fasteners	Cross pan-head captive screws; alternative screw-head options available on request
Drilled Cover	Ø22.5 mm holes with anti-rotation feature; 50 mm centre-to-centre spacing
Standard Supply	Earthing accessories and cardboard packaging
Customization & Machining	Drilling and machining as per customer drawings, including application-specific solutions
Available Accessories	Wall mounting brackets, internal mounting plates, DIN rail supports, and mounting screws

LINKBOX™
STRONG CONNECTIONS. SAFE SYSTEMS

TECHNICAL DRAWING

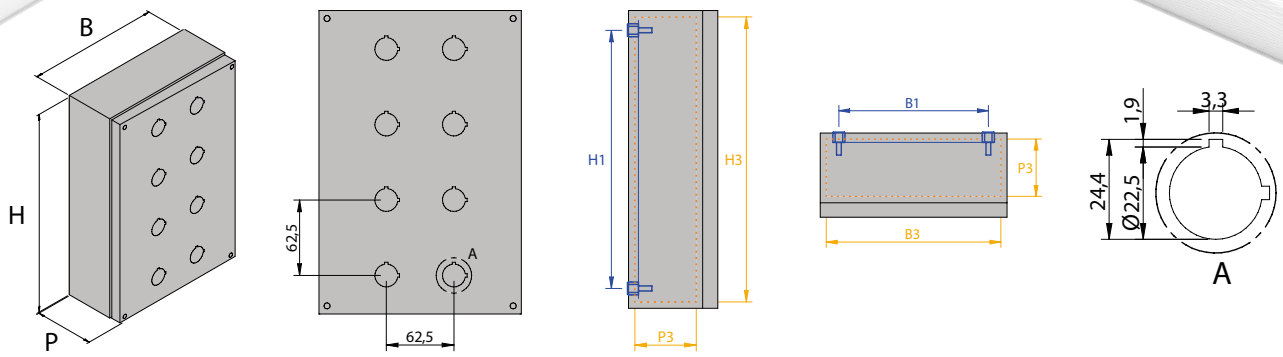

Parameter	Width	Height	Depth
Junction Box Dimension	B	H	P
Centreline Distance Between Rear Mounting Holes	B1	H1	—
Cover Drilling Area	B2	H2	—
Enclosure Drilling Area	B3	H3	P3

Part Model No.	Width B	Length H	Height P	Weight	Holes	DRILLING AREA			REAR BUSHING CENTRE DISTANCE		
						B3	H3	P3			
	(mm)	(mm)	(mm)	(Kg)	N°	(mm)	(mm)	(mm)	N° *	H1	H2
NLB-PBP-001	100	100	90	1.1	1	82	72	54	2	50	60
NLB-PBP-002	100	150	90	1.3	2	132	72	54	2	50	110
NLB-PBP-003	100	200	90	1.5	3	182	71	54	2	50	160
NLB-PBP-004	100	300	90	1.9	4	282	71	54	2	50	260
NLB-PBP-005	150	150	90	1.5	2x2	132	71	54	2	75	110
NLB-PBP-006	150	200	90	1.8	2x3	182	71	54	2	75	160
NLB-PBP-007	150	300	90	2.3	2x4	282	70	54	4	110	260
NLB-PBP-008	200	200	90	2.1	3x3	182	70	54	4	160	160

1. SCREWS

Description: Set of M5 screws with different heads to use as alternatives to standard.
Material: stainless steel.
Quantity: see below.
Installation: By customer.



Description	Code	Pack (Pcs.)
CROSS PAN HEAD SCREW	**NLB-SCR-001**	10
SLOTTED PAN HEAD SCREW	**NLB-SCR-002**	10
HEX HEAD SCREW	**NLB-SCR-003**	10
BUTTON HEAD HEX SOCKET SCREW	**NLB-SCR-004**	10
CAPTIVE WASHER D. 5 mm	**NLB-SCR-005**	10

2. MOUNTING PLATE

Description: Cable entry plate.
Material: Galvanised sheet metal.
Quantity: See below.
Installation: By customer.

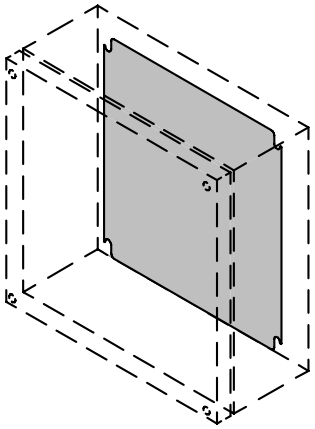

Enclosure		Code	Weight (Kg)	Mounting Plate		Pack (Pcs.)
B (mm)	H (mm)			Bp (mm)	Hp (mm)	
150	150	**NLB-MP-001**	0.3	97	120	1
150	200	**NLB-MP-002**	0.5	97	170	1
150	300	**NLB-MP-003**	0.7	97	270	1
200	200	**NLB-MP-004**	0.6	147	170	1
200	300	**NLB-MP-005**	1	147	270	1
200	400	**NLB-MP-006**	1.3	147	370	1
250	350	**NLB-MP-007**	1.4	197	320	1
300	300	**NLB-MP-008**	1.5	247	270	1
300	400	**NLB-MP-009**	2	247	370	1

3. SUPPORTS FOR DIN GUIDES

Description: Bottom profile for installing DIN guides.
Material: Galvanised sheet metal.
Quantity: See below.
Installation: By customer.

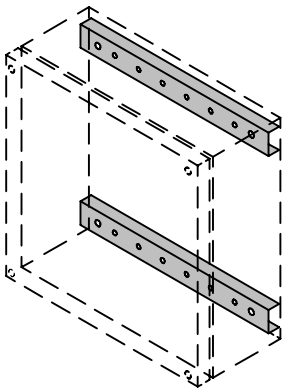

Enclosure Width B (mm)	Code	Weight (Kg)	DIMENSIONS AND HOLES N°		Pack (Pcs.)
			B1* (mm)	No. × Ø 4.2 mm	
150	**NLB-DGS-001**	**0.2**	97	4	2
200	**NLB-DGS-002**	**0.2**	147	6	2
250	**NLB-DGS-003**	**0.2**	197	8	2
300	**NLB-DGS-004**	**0.3**	247	10	2
400	**NLB-DGS-005**	**0.3**	347	14	2

4. WALL BRACKETS

Description: A: Multiple drilled brackets for wall mounting.
B: Multiple drilled wall mounting brackets with grounding system.
Material: AISI 316 / Wnr 1.4404 stainless steel.
Quantity: pack of 2 with mounting screws.
Installation: by customer



Description	Material	LinkBox Code	Pack (Pcs.)
WALL MOUNTING BRACKET SET	AISI 316 (W.Nr. 1.4404)	**NLB-WMB-001**	2
WALL MOUNTING BRACKET SET WITH GROUNDING SYSTEM	AISI 316 (W.Nr. 1.4404)	**NLB-WMB-002**	2

LUGX™

THE POWER OF PERFECT GRIP

PREMIUM QUALITY
High-grade copper, aluminium and other suitable materials for reliable connections.

SUPERIOR CONDUCTIVITY
Designed for efficient current transfer and dependable performance.

Corrosion Resistant

Secure Connection

Precision Engineered

Reliable electrical connections built for demanding applications.

Built to Grip. Made to Last.

N GANDHI ADVANCE ENGINEERING PRIVATE LIMITED.
An ISO 9001:2015 Certified Company

LUGS

OUR COMMITMENT

A PLEDGE TO DELIVER QUALITY SOLUTIONS
In every electrical installation, a reliable connection is essential. At **NAEPL**, we manufacture high-quality Cable Lugs and Cable Terminals designed to provide secure, stable and long-lasting electrical connections.
Every product is subjected to thorough quality inspection before reaching our customers. From material selection to manufacturing and final inspection, we focus on maintaining consistent quality and performance.

QUALITY PRODUCTS

COMPETITIVE PRICING

TIMELY DELIVERY

DEPENDABLE SERVICE

Our objective is simple — to deliver products that help our customers build safer, stronger and more reliable electrical systems.

CABLE LUGS

THE PERFECT CONNECTION STARTS HERE
LUGX Cable Lugs are designed to establish secure electrical and mechanical connections between cables and electrical equipment. Manufactured using quality materials and controlled processes, our lugs are designed for dependable performance across demanding applications.

KEY BENEFITS

Reliable Electrical Connectivity
Designed to provide stable and uninterrupted electrical connections.

Mechanical Strength
Provides strong mechanical support and helps prevent accidental disconnections.

Enhanced Safety
Helps reduce the risk of loose connections, overheating and electrical failures.

Easy Maintenance
Designed for convenient inspection, testing and maintenance.

Durability & Corrosion Resistance
Quality copper and Aluminium materials provide durability and extended service life.

CABLE TERMINALS

SECURE THE CONNECTION. PROTECT THE SYSTEM.
LUGX Cable Terminals are designed to provide secure cable entry while offering mechanical protection and reliable cable retention. Our cable Terminals can be customized to meet specific customer and application requirements.

DESIGNED FOR
- **Secure cable termination**
- **Cable retention**
- **Mechanical protection**
- **Reliable installation**
- **Industrial electrical applications**
- **Customized requirements**

Engineered for dependable cable management and secure electrical installations.

MATERIALS

ENGINEERED WITH THE RIGHT MATERIAL
The performance of an electrical component begins with the quality of its material.

BRASS
Brass is an alloy primarily made from copper and zinc. It offers excellent machinability, strength and durability, making it suitable for precision electrical components.

ALUMINIUM
Lightweight and strong, Aluminium offers good electrical conductivity while reducing overall component weight. It is widely used where weight efficiency and conductivity are important.

COPPER
Copper is valued for its excellent electrical conductivity, good workability and durability. It is widely used for electrical connections where efficient current transmission is essential.

LUGX™

THE POWER OF PERFECT GRIP

LUGS & TERMINALS

COPPER CABLE LUGS

One -Hole Standard	08
One Hole Long Barrel	10
One Hole Heavy Duty	13
One Hole Bell Mouth	16
One Hole Narrow Palm	19
Two Hole Heavy Duty	20
Two Hole Long Barrel	23
Two Hole Long Barrel Heavy Duty	26
Four Hole Transformer	29

ALUMINIUM CRIMPING TERMINALS LUGS

One Hole Standard 30

Two Hole Standard 32

One Hole Long Barrel 33

COPPER RING TERMINALS

Open Close Soldering Type 34

BI-METALLIC TERMINALS

Friction Welded Type 35

Copper Ring Type 36

COPPER CRIMPING PIN TERMINALS

Non-Insulated and Insulated 37

COPPER CRIMPING RING TERMINALS

Non-Insulated 38

COPPER CRIMPING FORK TERMINALS

Non-Insulated and Insulated 40

COPPER RING TONGUE FORK TERMINALS

Non-Insulated and Insulated 41

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

One -Hole Standard

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CUL-1-01P5-M04	1.5	M4	4.2	1.8	8	4	5	6	17
LX-CUL-1-01P5-M05	1.5	M5	5.2	1.8	8	4	5	6	17
LX-CUL-1-01P5-M06	1.5	M6	6.5	1.8	10	4	6	6	18
LX-CUL-1-02P5-M04	2.5	M4	4.2	2.4	8	4	5	8	19
LX-CUL-1-02P5-M05	2.5	M5	5.2	2.4	8	4	5	8	19
LX-CUL-1-02P5-M06	2.5	M6	6.5	2.4	10	5	6	8	21
LX-CUL-1-02P5-M08	2.5	M8	8.4	2.4	12	6	9	8	26
LX-CUL-1-0004-M04	4	M4	4.2	3.1	10	5	6	8	21
LX-CUL-1-0004-M05	4	M5	5.2	3.1	10	5	6	8	21
LX-CUL-1-0004-M06	4	M6	6.5	3.1	10	5	6	8	21
LX-CUL-1-0004-M08	4	M8	8.4	3.1	12	6	9	8	24
LX-CUL-1-0006-M04	6	M4	4.2	3.8	10	6	6	10	23
LX-CUL-1-0006-M05	6	M5	5.2	3.8	10	6	6	10	23
LX-CUL-1-0006-M06	6	M6	6.5	3.8	10	5	6	10	24
LX-CUL-1-0006-M08	6	M8	8.4	3.8	12	6	9	10	27
LX-CUL-1-0006-M10	6	M10	10.5	3.8	15	8	11	10	32
LX-CUL-1-0010-M05	10	M5	5.2	4.5	11	6	7	10	26.5
LX-CUL-1-0010-M06	10	M6	6.5	4.5	11	6	7	10	26.5
LX-CUL-1-0010-M08	10	M8	8.4	4.5	12	6	9	10	27.5
LX-CUL-1-0010-M10	10	M10	10.5	4.5	15	8	11	11	32
LX-CUL-1-0010-M12	10	M12	13	4.5	17	10	13	11	39
LX-CUL-1-0120-M08	120	M8	8.4	14.8	26	13	14	23	60
LX-CUL-1-0120-M10	120	M10	10.5	14.8	26	13	14	23	60
LX-CUL-1-0120-M12	120	M12	13	14.8	26	13	14	23	60
LX-CUL-1-0120-M14	120	M14	14.5	14.8	26	13	14	23	60
LX-CUL-1-0120-M16	120	M16	17	14.8	26	16	16	23	64
LX-CUL-1-0120-M20	120	M20	21	14.8	26	16	20	23	68
LX-CUL-1-0150-M08	150	M8	8.4	16	28	16	16	27	70
LX-CUL-1-0150-M10	150	M10	10.5	16	28	16	16	27	70
LX-CUL-1-0150-M12	150	M12	13	16	28	16	16	27	70

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

One -Hole Standard

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CUL-1-0150-M14	150	M14	14.5	16	28	16	16	27	70
LX-CUL-1-0150-M16	150	M16	17	16	28	16	16	27	70
LX-CUL-1-0150-M18	150	M18	19	16	28	16	16	27	73
LX-CUL-1-0150-M20	150	M20	21	16	28	16	16	27	73
LX-CUL-1-0185-M08	185	M8	8.4	18	32	17	19	32	80
LX-CUL-1-0185-M10	185	M10	10.5	18	32	17	19	32	80
LX-CUL-1-0185-M12	185	M12	13	18	32	17	19	32	80
LX-CUL-1-0185-M14	185	M14	14.5	18	32	17	19	32	80
LX-CUL-1-0185-M16	185	M16	17	18	32	17	19	32	80
LX-CUL-1-0185-M18	185	M18	19	18	32	17	19	32	80
LX-CUL-1-0185-M20	185	M20	21	18	32	17	19	32	80
LX-CUL-1-0240-M08	240	M8	8.4	22	38	20	21	39	94
LX-CUL-1-0240-M10	240	M10	10.5	22	38	20	21	39	94
LX-CUL-1-0240-M12	240	M12	13	22	38	20	21	39	94
LX-CUL-1-0240-M14	240	M14	14.5	22	38	20	21	39	94
LX-CUL-1-0240-M16	240	M16	17	22	38	20	21	39	94
LX-CUL-1-0240-M18	240	M18	19	22	38	20	21	39	94
LX-CUL-1-0240-M20	240	M20	21	22	38	20	21	39	94
LX-CUL-1-0300-M08	300	M8	8.4	24	42	22	23	42	102
LX-CUL-1-0300-M10	300	M10	10.5	24	42	22	23	42	102
LX-CUL-1-0300-M12	300	M12	13	24	42	22	23	42	102
LX-CUL-1-0300-M14	300	M14	14.5	24	42	22	23	42	102
LX-CUL-1-0300-M16	300	M16	17	24	42	22	23	42	102
LX-CUL-1-0300-M18	300	M18	19	24	42	22	23	42	102
LX-CUL-1-0300-M20	300	M20	21	24	42	22	23	42	102
LX-CUL-1-0400-M08	400	M8	8.4	28	49	25	25	45	112
LX-CUL-1-0400-M10	400	M10	10.5	28	49	25	25	45	112
LX-CUL-1-0400-M12	400	M12	13	28	49	25	25	45	112
LX-CUL-1-0400-M14	400	M14	14.5	28	49	25	25	45	112
LX-CUL-1-0400-M16	400	M16	17	28	49	25	25	45	112
LX-CUL-1-0400-M18	400	M18	19	28	49	25	25	45	112
LX-CUL-1-0400-M20	400	M20	21	28	49	25	25	45	112

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

One Hole Long Barrel

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CUL-0006-M08	6	M8	8.4	3.8	12	7	7	15	31.5
LX-CUL-0010-M08	10	M8	8.4	4.5	12	7	7	15	34
LX-CUL-0010-M10	10	M10	10.5	4.5	12	10	10	15	40
LX-CUL-0010-M12	10	M12	13	4.5	17	10	12	15	42
LX-CUL-0016-M06	16	M6	6.5	5.4	12	7	7	18	35
LX-CUL-0016-M08	16	M8	8.4	5.4	12	7	7	18	35
LX-CUL-0016-M10	16	M10	10.5	5.4	15	7	7	18	35
LX-CUL-0016-M12	16	M12	13	5.4	17	7	7	18	35
LX-CUL-0025-M08	25	M8	8.4	6.8	13	8	12	16	41
LX-CUL-0025-M10	25	M10	10.5	6.8	15	8	12	16	41
LX-CUL-0025-M12	25	M12	13	6.8	17	10	12	16	43
LX-CUL-0035-M08	35	M8	8.4	8.2	16	9	14	20	48
LX-CUL-0035-M10	35	M10	10.5	8.2	16	9	14	20	48
LX-CUL-0035-M12	35	M12	13	8.2	16	9	14	20	48
LX-CUL-0050-M08	50	M8	8.4	9.5	18	10	16	26	59
LX-CUL-0050-M10	50	M10	10.5	9.5	18	10	16	26	59
LX-CUL-0050-M12	50	M12	13	9.5	20	10	16	26	59
LX-CUL-0050-M14	50	M14	14.5	9.5	20	10	16	26	59
LX-CUL-0070-M08	70	M8	8.4	11.3	21	12	19	28	66
LX-CUL-0070-M10	70	M10	10.5	11.3	21	12	19	28	66
LX-CUL-0070-M12	70	M12	13	11.3	21	12	19	28	66
LX-CUL-0070-M14	70	M14	14.5	11.3	22	12	19	28	66
LX-CUL-0070-M16	70	M16	17	11.3	22	14.5	16.5	28	66
LX-CUL-0095-M08	95	M8	8.4	13.5	25	12	20	32	74
LX-CUL-0095-M10	95	M10	10.5	13.5	25	12	20	32	74
LX-CUL-0095-M12	95	M12	13	13.5	25	12	20	32	74
LX-CUL-0095-M14	95	M14	14.5	13.5	25	14	19	32	75
LX-CUL-0095-M16	95	M16	17	13.5	25	14	19	32	75
LX-CUL-0095-M18	95	M18	19	13.5	25	14	19	32	75

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

One Hole Long Barrel

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CUL-0120-M08	120	M8	8.4	15	28	14	23	35	82
LX-CUL-0120-M10	120	M10	10.5	15	28	14	23	35	82
LX-CUL-0120-M12	120	M12	13	15	28	14	23	35	82
LX-CUL-0120-M14	120	M14	14.5	15	28	14	23	35	82
LX-CUL-0120-M16	120	M16	17	15	28	14	23	35	82
LX-CUL-0120-M18	120	M18	19	15	28	14	23	35	82
LX-CUL-0120-M20	120	M20	21	15	28	14	23	35	82
LX-CUL-0150-M08	150	M8	8.4	16.5	30	14	24	38	86
LX-CUL-0150-M10	150	M10	10.5	16.5	30	14	24	38	86
LX-CUL-0150-M12	150	M12	13	16.5	30	14	24	38	86
LX-CUL-0150-M14	150	M14	14.5	16.5	30	14	24	38	86
LX-CUL-0150-M16	150	M16	17	16.5	30	14	24	38	86
LX-CUL-0150-M18	150	M18	19	16.5	30	14	24	38	86
LX-CUL-0150-M20	150	M20	21	16.5	30	14	24	38	86
LX-CUL-0185-M08	185	M8	8.4	18.5	34	17	23	43	95
LX-CUL-0185-M10	185	M10	10.5	18.5	34	17	23	43	95
LX-CUL-0185-M12	185	M12	13	18.5	34	17	23	43	95
LX-CUL-0185-M14	185	M14	14.5	18.5	34	17	23	43	95
LX-CUL-0185-M16	185	M16	17	18.5	34	17	23	43	95
LX-CUL-0185-M18	185	M18	19	18.5	34	17	23	43	95
LX-CUL-0185-M20	185	M20	21	18.5	34	17	23	43	95
LX-CUL-0240-M08	240	M8	8.4	21	38	20	30	50	112
LX-CUL-0240-M10	240	M10	10.5	21	38	20	30	50	112
LX-CUL-0240-M12	240	M12	13	21	38	20	30	50	112
LX-CUL-0240-M14	240	M14	14.5	21	38	20	30	50	117
LX-CUL-0240-M16	240	M16	17	21	38	20	30	50	117
LX-CUL-0240-M18	240	M18	19	21	38	20	30	50	117
LX-CUL-0240-M20	240	M20	21	21	38	20	30	50	117
LX-CUL-0300-M10	300	M10	10.5	23.5	43	20	32	54	120
LX-CUL-0300-M12	300	M12	13	23.5	43	20	32	54	120
LX-CUL-0300-M14	300	M14	14.5	23.5	43	20	32	54	120
LX-CUL-0300-M16	300	M16	17	23.5	43	20	32	54	120
LX-CUL-0300-M18	300	M18	19	23.5	43	20	32	54	120

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

One Hole Long Barrel

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CUL-0300-M20	300	M20	21	23.5	43	20	32	54	120
LX-CUL-0400-M10	400	M10	10.5	28.5	52.5	22	34	62	134
LX-CUL-0400-M12	400	M12	13	28.5	52.5	22	34	62	134
LX-CUL-0400-M14	400	M14	14.5	28.5	52.5	22	34	62	134
LX-CUL-0400-M16	400	M16	17	28.5	52.5	22	34	62	134
LX-CUL-0400-M18	400	M18	19	28.5	52.5	22	34	62	134
LX-CUL-0400-M20	400	M20	21	28.5	52.5	22	34	62	134
LX-CUL-0500-M10	500	M10	10.5	30	56	28	28	69	145
LX-CUL-0500-M12	500	M12	13	30	56	28	28	69	145
LX-CUL-0500-M14	500	M14	14.5	30	56	28	28	69	145
LX-CUL-0500-M16	500	M16	17	30	56	28	28	69	145
LX-CUL-0500-M18	500	M18	19	30	56	28	28	69	145
LX-CUL-0500-M20	500	M20	21	30	56	28	28	69	145
LX-CUL-0630-M10	630	M10	10.5	35	63.8	30	30	78	158
LX-CUL-0630-M12	630	M12	13	35	63.8	30	30	78	158
LX-CUL-0630-M14	630	M14	14.5	35	63.8	30	30	78	158
LX-CUL-0630-M16	630	M16	17	35	63.8	30	30	78	158
LX-CUL-0630-M18	630	M18	19	35	63.8	30	30	78	158
LX-CUL-0630-M20	630	M20	21	35	63.8	30	30	78	158
LX-CUL-0800-M16	800	M16	17	39	72	30	30	97	187
LX-CUL-1000-M10	1000	M10	10.5	44	79	23	24	126	202
LX-CUL-1000-M12	1000	M12	13	44	79	23	24	126	202
LX-CUL-1000-M14	1000	M14	14.5	44	79	23	24	126	202
LX-CUL-1000-M16	1000	M16	17	44	79	23	24	126	202
LX-CUL-1000-M20	1000	M20	21	44	79	23	24	126	202

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

One Hole Heavy Duty

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CUHV-0025-M06	25	M6	6.5	6.8	16	10	12	37	68.5
LX-CUHV-0025-M08	25	M8	8.4	6.8	16	10	12	37	68.5
LX-CUHV-0025-M10	25	M10	10.5	6.8	16	10	12	37	68.5
LX-CUHV-0025-M12	25	M12	13	6.8	16	10	12	37	68.5
LX-CUHV-0035-M06	35	M6	6.5	8.2	19.5	14	16	37	79.5
LX-CUHV-0035-M08	35	M8	8.4	8.2	19.5	14	16	37	79.5
LX-CUHV-0035-M10	35	M10	10.5	8.2	19.5	14	16	37	79.5
LX-CUHV-0035-M12	35	M12	13	8.2	19.5	14	16	37	79.5
LX-CUHV-0035-M14	35	M14	14.5	8.2	19.5	14	16	37	79.5
LX-CUHV-0035-M16	35	M16	17	8.2	19.5	14	16	37	79.5
LX-CUHV-0050-M06	50	M6	6.5	9.5	20	15	16	39.5	79.5
LX-CUHV-0050-M08	50	M8	8.4	9.5	20	15	16	39.5	79.5
LX-CUHV-0050-M10	50	M10	10.5	9.5	20	15	16	39.5	79.5
LX-CUHV-0050-M12	50	M12	13	9.5	20	15	16	39.5	79.5
LX-CUHV-0050-M14	50	M14	14.5	9.5	20	15	16	39.5	79.5
LX-CUHV-0050-M16	50	M16	17	9.5	20	15	16	39.5	79.5
LX-CUHV-0070-M06	70	M6	6.5	11	23	14	16	42	81.5
LX-CUHV-0070-M08	70	M8	8.4	11	23	14	16	42	81.5
LX-CUHV-0070-M10	70	M10	10.5	11	23	14	16	42	81.5
LX-CUHV-0070-M12	70	M12	13	11	23	14	16	42	81.5
LX-CUHV-0070-M14	70	M14	14.5	11	23	14	16	42	81.5
LX-CUHV-0070-M16	70	M16	17	11	23	14	16	42	81.5
LX-CUHV-0095-M08	95	M8	8.4	13.5	27	14	16	46	90
LX-CUHV-0095-M10	95	M10	10.5	13.5	27	14	16	46	90
LX-CUHV-0095-M12	95	M12	13	13.5	27	14	16	46	90
LX-CUHV-0095-M14	95	M14	14.5	13.5	27	14	16	46	90
LX-CUHV-0095-M16	95	M16	17	13.5	27	14	16	46	90
LX-CUHV-0095-M18	95	M18	19	13.5	27	14	16	46	90
LX-CUHV-0095-M20	95	M20	21	13.5	27	14	16	46	90

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

One Hole Heavy Duty

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CUHV-0120-M08	120	M8	8.4	15	29	16	16	52	98
LX-CUHV-0120-M10	120	M10	10.5	15	29	16	16	52	98
LX-CUHV-0120-M12	120	M12	13	15	29	16	16	52	98
LX-CUHV-0120-M14	120	M14	14.5	15	29	16	16	52	98
LX-CUHV-0120-M16	120	M16	17	15	29	16	16	52	98
LX-CUHV-0120-M18	120	M18	19	15	29	16	16	52	98
LX-CUHV-0120-M20	120	M20	21	15	29	16	16	52	98
LX-CUHV-0150-M08	150	M8	8.4	16.5	32	19	16	56.5	105
LX-CUHV-0150-M10	150	M10	10.5	16.5	32	19	16	56.5	105
LX-CUHV-0150-M12	150	M12	13	16.5	32	19	16	56.5	105
LX-CUHV-0150-M14	150	M14	14.5	16.5	32	19	16	56.5	105
LX-CUHV-0150-M16	150	M16	17	16.5	32	19	16	56.5	105
LX-CUHV-0150-M18	150	M18	19	16.5	32	19	16	56.5	105
LX-CUHV-0150-M20	150	M20	21	16.5	32	19	16	56.5	105
LX-CUHV-0185-M08	185	M8	8.4	18.5	32.7	17	19	65	113.5
LX-CUHV-0185-M10	185	M10	10.5	18.5	32.7	17	19	65	113.5
LX-CUHV-0185-M12	185	M12	13	18.5	32.7	17	19	65	113.5
LX-CUHV-0185-M14	185	M14	14.5	18.5	32.7	17	19	65	113.5
LX-CUHV-0185-M16	185	M16	17	18.5	32.7	17	19	65	113.5
LX-CUHV-0185-M18	185	M18	19	18.5	32.7	17	19	65	113.5
LX-CUHV-0185-M20	185	M20	21	18.5	32.7	17	19	65	113.5
LX-CUHV-0240-M08	240	M8	8.4	21	38	20	20	65	119.5
LX-CUHV-0240-M10	240	M10	10.5	21	38	20	20	65	119.5
LX-CUHV-0240-M12	240	M12	13	21	38	20	20	65	119.5
LX-CUHV-0240-M14	240	M14	14.5	21	38	20	20	65	119.5
LX-CUHV-0240-M16	240	M16	17	21	38	20	20	65	119.5
LX-CUHV-0240-M18	240	M18	19	21	38	20	20	65	119.5
LX-CUHV-0240-M20	240	M20	21	21	38	20	20	65	119.5
LX-CUHV-0300-M08	300	M8	8.4	23.5	45	22	22	79.5	138.5
LX-CUHV-0300-M10	300	M10	10.5	23.5	45	22	22	79.5	138.5
LX-CUHV-0300-M12	300	M12	13	23.5	45	22	22	79.5	138.5
LX-CUHV-0300-M14	300	M14	14.5	23.5	45	22	22	79.5	138.5
LX-CUHV-0300-M16	300	M16	17	23.5	45	22	22	79.5	138.5

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

One Hole Heavy Duty

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CUHV-0300-M18	300	M18	19	23.5	45	22	22	79.5	138.5
LX-CUHV-0300-M20	300	M20	21	23.5	45	22	22	79.5	138.5
LX-CUHV-0400-M10	400	M10	10.5	27	53	26	26	81	154
LX-CUHV-0400-M12	400	M12	13	27	53	26	26	81	154
LX-CUHV-0400-M14	400	M14	14.5	27	53	26	26	81	154
LX-CUHV-0400-M16	400	M16	17	27	53	26	26	81	154
LX-CUHV-0400-M18	400	M18	19	27	53	26	26	81	154
LX-CUHV-0400-M20	400	M20	21	27	53	26	26	81	154
LX-CUHV-0500-M10	500	M10	10.5	30.3	57	28	28	85.5	166
LX-CUHV-0500-M12	500	M12	13	30.3	57	28	28	85.5	166
LX-CUHV-0500-M14	500	M14	14.5	30.3	57	28	28	85.5	166
LX-CUHV-0500-M16	500	M16	17	30.3	57	28	28	85.5	166
LX-CUHV-0500-M18	500	M18	19	30.3	57	28	28	85.5	166
LX-CUHV-0500-M20	500	M20	21	30.3	57	28	28	85.5	166
LX-CUHV-0630-M10	630	M10	10.5	33.4	61	33	33	95.5	188
LX-CUHV-0630-M12	630	M12	13	33.4	61	33	33	95.5	188
LX-CUHV-0630-M14	630	M14	14.5	33.4	61	33	33	95.5	188
LX-CUHV-0630-M16	630	M16	17	33.4	61	33	33	95.5	188
LX-CUHV-0630-M18	630	M18	19	33.4	61	33	33	95.5	188
LX-CUHV-0630-M20	630	M20	21	33.4	61	33	33	95.5	188

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

One Hole Bell Mouth

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CUL-1-BM-01P5-M04	1.5	M4	4.2	1.8	8	4	5	6	17
LX-CUL-1-BM-01P5-M05	1.5	M5	5.2	1.8	8	4	5	6	17
LX-CUL-1-BM-01P5-M06	1.5	M6	6.5	1.8	10	4	6	6	18
LX-CUL-1-BM-02P5-M04	2.5	M4	4.2	2.4	8	4	5	8	19
LX-CUL-1-BM-02P5-M05	2.5	M5	5.2	2.4	8	4	5	8	19
LX-CUL-1-BM-02P5-M06	2.5	M6	6.5	2.4	10	5	6	8	21
LX-CUL-1-BM-02P5-M08	2.5	M8	8.4	2.4	12	6	9	8	26
LX-CUL-1-BM-0004-M04	4	M4	4.2	3.1	10	5	6	8	21
LX-CUL-1-BM-0004-M05	4	M5	5.2	3.1	10	6	6	8	21
LX-CUL-1-BM-0004-M06	4	M6	6.5	3.1	10	5	6	8	21
LX-CUL-1-BM-0004-M08	4	M8	8.4	3.1	12	6	9	8	24
LX-CUL-1-BM-0006-M04	6	M4	4.2	3.8	10	6	6	10	23
LX-CUL-1-BM-0006-M05	6	M5	5.2	3.8	10	6	6	10	23
LX-CUL-1-BM-0006-M06	6	M6	6.5	3.8	10	5	6	10	24
LX-CUL-1-BM-0006-M08	6	M8	8.4	3.8	12	6	9	10	27
LX-CUL-1-BM-0006-M10	6	M10	10.5	3.8	15	8	11	10	32
LX-CUL-1-BM-0010-M05	10	M5	5.2	4.5	11	7	7	10	26.5
LX-CUL-1-BM-0010-M06	10	M6	6.5	4.5	11	7	7	10	26.5
LX-CUL-1-BM-0010-M08	10	M8	8.4	4.5	12	6	9	10	27.5
LX-CUL-1-BM-0010-M10	10	M10	10.5	4.5	15	8	11	11	32
LX-CUL-1-BM-0010-M12	10	M12	13	4.5	17	10	13	11	39
LX-CUL-1-BM-0016-M05	16	M5	5.2	5.4	12	7	7	12	30
LX-CUL-1-BM-0016-M06	16	M6	6.5	5.4	12	7	7	12	30
LX-CUL-1-BM-0016-M08	16	M8	8.4	5.4	12	7	7	12	30
LX-CUL-1-BM-0016-M10	16	M10	10.5	5.4	15	8	12	12	35
LX-CUL-1-BM-0016-M12	16	M12	13	5.4	17	11	13	12	39
LX-CUL-1-BM-0016-M16	16	M16	17	5.4	21	12	13	15	47
LX-CUL-1-BM-0025-M06	25	M6	6.5	6.8	13	7	7	12	30

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

One Hole Bell Mouth

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CUL-1-BM-0025-M08	25	M8	8.4	6.8	13	7	7	12	30
LX-CUL-1-BM-0025-M10	25	M10	10.5	6.8	15	10	11	13	36.5
LX-CUL-1-BM-0025-M12	25	M12	13	6.8	17	10	12	13	40
LX-CUL-1-BM-0025-M16	25	M16	17	6.8	21	10	12	13	47
LX-CUL-1-BM-0035-M06	35	M6	6.5	8.2	16	9	9	14	36
LX-CUL-1-BM-0035-M08	35	M8	8.4	8.2	16	9	9	14	36
LX-CUL-1-BM-0035-M10	35	M10	10.5	8.2	16	9	9	14	37
LX-CUL-1-BM-0035-M12	35	M12	13	8.2	18	10	12	13.5	41
LX-CUL-1-BM-0035-M14	35	M14	14.5	8.2	20	10	12	13.5	41
LX-CUL-1-BM-0035-M16	35	M16	17	8.2	22	14	18	13.5	50
LX-CUL-1-BM-0050-M06	50	M6	6.5	9.5	18	10	11	16	42
LX-CUL-1-BM-0050-M08	50	M8	8.4	9.5	18	10	11	16	42
LX-CUL-1-BM-0050-M10	50	M10	10.5	9.5	18	10	11	16	42
LX-CUL-1-BM-0050-M12	50	M12	13	9.5	20	10	12	17	45
LX-CUL-1-BM-0050-M16	50	M16	17	9.5	22	15	15	18	52
LX-CUL-1-BM-0050-M20	50	M20	21	9.5	26	15	18	18	60
LX-CUL-1-BM-0070-M06	70	M6	6.5	11.3	21	11	11	18.5	47
LX-CUL-1-BM-0070-M08	70	M8	8.4	11.3	21	11	11	18.5	47
LX-CUL-1-BM-0070-M10	70	M10	10.5	11.3	21	11	11	18.5	47
LX-CUL-1-BM-0070-M12	70	M12	13	11.3	21	11	11	18.5	47
LX-CUL-1-BM-0070-M14	70	M14	14.5	11.3	22	14	15	18.5	55
LX-CUL-1-BM-0070-M16	70	M16	17	11.3	26	14	16	18.5	56
LX-CUL-1-BM-0070-M20	70	M20	21	11.3	28	16	18	18.5	63
LX-CUL-1-BM-0095-M06	95	M6	6.5	13.5	25	12	13	21	53
LX-CUL-1-BM-0095-M08	95	M8	8.4	13.5	25	12	13	21	53
LX-CUL-1-BM-0095-M10	95	M10	10.5	13.5	25	12	13	21	53
LX-CUL-1-BM-0095-M12	95	M12	13	13.5	25	12	13	21	53
LX-CUL-1-BM-0095-M14	95	M14	14.5	13.5	25	14	15	22	55
LX-CUL-1-BM-0095-M16	95	M16	17	13.5	25	14	16	22	58
LX-CUL-1-BM-0095-M20	95	M20	21	13.5	28	15	16	22	63
LX-CUL-1-BM-0120-M6	120	M6	6.5	15	28	13	14	23	60
LX-CUL-1-BM-0120-M8	120	M8	8.4	15	28	13	14	23	60
LX-CUL-1-BM-0120-M10	120	M10	10.5	15	28	13	14	23	60

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

One Hole Bell Mouth

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CUL-1-BM-0120-M12	120	M12	13	15	28	13	14	23	60
LX-CUL-1-BM-0120-M14	120	M14	14.5	15	28	13	14	23	60
LX-CUL-1-BM-0120-M16	120	M16	17	15	28	16	16	23	64
LX-CUL-1-BM-0120-M20	120	M20	21	15	28	16	20	23	68
LX-CUL-1-BM-0150-M06	150	M6	6.5	16.5	30	16	16	27	70
LX-CUL-1-BM-0150-M08	150	M8	8.4	16.5	30	16	16	27	70
LX-CUL-1-BM-0150-M10	150	M10	10.5	16.5	30	16	16	27	70
LX-CUL-1-BM-0150-M12	150	M12	13	16.5	30	16	16	27	70
LX-CUL-1-BM-0150-M14	150	M14	14.5	16.5	30	16	16	27	70
LX-CUL-1-BM-0150-M16	150	M16	17	16.5	30	16	16	27	70
LX-CUL-1-BM-0150-M18	150	M18	19	16.5	30	16	16	27	70
LX-CUL-1-BM-0150-M20	150	M20	21	16.5	30	19	16	27	73
LX-CUL-1-BM-0185-M06	185	M6	6.5	18.5	34	17	19	32	80
LX-CUL-1-BM-0185-M08	185	M8	8.4	18.5	34	17	19	32	80
LX-CUL-1-BM-0185-M10	185	M10	10.5	18.5	34	17	19	32	80
LX-CUL-1-BM-0185-M12	185	M12	13	18.5	34	17	19	32	80
LX-CUL-1-BM-0185-M14	185	M14	14.5	18.5	34	17	19	32	80
LX-CUL-1-BM-0185-M16	185	M16	17	18.5	34	17	19	32	80
LX-CUL-1-BM-0185-M18	185	M18	19	18.5	34	17	19	32	80
LX-CUL-1-BM-0185-M20	185	M20	21	18.5	34	17	19	32	80
LX-CUL-1-BM-0240-M06	240	M6	6.5	21	38	20	20	37	94
LX-CUL-1-BM-0240-M08	240	M8	8.4	21	38	20	20	37	94
LX-CUL-1-BM-0240-M10	240	M10	10.5	21	38	20	20	37	94
LX-CUL-1-BM-0240-M12	240	M12	13	21	38	20	20	37	94
LX-CUL-1-BM-0240-M14	240	M14	14.5	21	38	20	20	37	94
LX-CUL-1-BM-0240-M16	240	M16	17	21	38	20	20	37	94
LX-CUL-1-BM-0240-M18	240	M18	19	21	38	20	20	37	94
LX-CUL-1-BM-0240-M20	240	M20	21	21	38	20	20	37	94

COPPER CABLE LUGS

One Hole Narrow Palm

Catalogue Code	Sq.mm	Stud	Dimensions (mm)				
			Stud Hole	Barrel ID	Palm Width	Barrel Length	Total
			ØE	ØA	D	B	J
LX-CUL-1-NP-0035-M06	35	M6	6.5	8.2	15	21	41
LX-CUL-1-NP-0050-M06	50	M6	6.5	9.5	15	22	43
LX-CUL-1-NP-0050-M08	50	M8	8.4	9.5	15	22	46
LX-CUL-1-NP-0050-M10	50	M10	10.5	9.5	19	22	49
LX-CUL-1-NP-0070-M06	70	M6	6.5	11.2	17	24	45
LX-CUL-1-NP-0070-M08	70	M8	8.4	11.2	17	24	48
LX-CUL-1-NP-0070-M10	70	M10	10.5	11.2	19	24	51
LX-CUL-1-NP-0095-M08	95	M8	8.4	13.4	19	27	51
LX-CUL-1-NP-0095-M10	95	M10	10.5	13.4	19	27	55
LX-CUL-1-NP-0120-M08	120	M8	8.4	15.6	19	30	61
LX-CUL-1-NP-0120-M10	120	M10	10.5	15.6	19	30	61
LX-CUL-1-NP-0150-M08	150	M8	8.4	16.7	19	30	66
LX-CUL-1-NP-0150-M10	150	M10	10.5	16.7	19	30	66
LX-CUL-1-NP-0185-M10	185	M10	10.5	18.4	31	38	82
LX-CUL-1-NP-0240-M10	240	M10	10.5	21.2	31	38	82
LX-CUL-1-NP-0300-M10	300	M10	10.5	23.5	42	42	87

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

Two Hole Heavy Duty

Catalogue Code	Sq.mm	Stud	Dimensions (mm)							
			Stud Hole	Hole Spacing	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE		ØA	D	G	H	B	J
LX-CU2-HV-0025-M06	25	M6	6.5	44.5	6.8	16	15	17	37	123
LX-CU2-HV-0025-M08	25	M8	8.4	44.5	6.8	16	15	17	37	123
LX-CU2-HV-0025-M10	25	M10	10.5	44.5	6.8	16	15	17	37	123
LX-CU2-HV-0025-M12	25	M12	13	44.5	6.8	18	15	17	37	123
LX-CU2-HV-0035-M06	35	M6	6.5	44.5	8.2	18	15	17	37	124
LX-CU2-HV-0035-M08	35	M8	8.4	44.5	8.2	18	15	17	37	124
LX-CU2-HV-0035-M10	35	M10	10.5	44.5	8.2	18	15	17	37	124
LX-CU2-HV-0035-M12	35	M12	13	44.5	8.2	18	15	17	37	124
LX-CU2-HV-0035-M14	35	M14	14.5	44.5	8.2	18	15	17	37	124
LX-CU2-HV-0035-M16	35	M16	17	44.5	8.2	18	15	17	37	124
LX-CU2-HV-0050-M06	50	M6	6.8	44.5	9.5	20	14	16	39.5	124
LX-CU2-HV-0050-M08	50	M8	8.4	44.5	9.5	20	14	16	39.5	124
LX-CU2-HV-0050-M10	50	M10	10.5	44.5	9.5	20	14	16	39.5	124
LX-CU2-HV-0050-M12	50	M12	13	44.5	9.5	20	14	16	39.5	124
LX-CU2-HV-0050-M14	50	M14	14.5	44.5	9.5	20	14	16	39.5	124
LX-CU2-HV-0050-M16	50	M16	17	44.5	9.5	20	14	16	34	124
LX-CU2-HV-0070-M06	70	M6	6.5	44.5	11	23	14	16	42	126
LX-CU2-HV-0070-M08	70	M8	8.4	44.5	11	23	14	16	42	126
LX-CU2-HV-0070-M10	70	M10	10.5	44.5	11	23	14	16	42	126
LX-CU2-HV-0070-M12	70	M12	13	44.5	11	23	14	16	42	126
LX-CU2-HV-0070-M14	70	M14	14.5	44.5	11	23	14	16	42	126
LX-CU2-HV-0070-M16	70	M16	17	44.5	11	23	14	16	36	126
LX-CU2-HV-0095-M08	95	M8	8.4	44.5	13.5	27	16	18	46	138.5
LX-CU2-HV-0095-M10	95	M10	10.5	44.5	13.5	27	16	18	46	138.5
LX-CU2-HV-0095-M12	95	M12	13	44.5	13.5	27	16	18	46	138.5
LX-CU2-HV-0095-M14	95	M14	14.5	44.5	13.5	27	16	18	46	138.5
LX-CU2-HV-0095-M16	95	M16	17	44.5	13.5	27	16	18	46	138.5
LX-CU2-HV-0095-M18	95	M18	19	44.5	13.5	27	16	18	46	138.5
LX-CU2-HV-0120-M08	120	M8	8.4	44.5	15	29	16	18	52	144.5

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

Two Hole Heavy Duty

Catalogue Code	Sq.mm	Stud	Dimensions (mm)							
			Stud Hole	Hole Spacing	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE		ØA	D	G	H	B	J
LX-CU2-HV-0120-M10	120	M10	10.5	44.5	15	29	16	18	52	144.5
LX-CU2-HV-0120-M12	120	M12	13	44.5	15	29	16	18	52	144.5
LX-CU2-HV-0120-M14	120	M14	14.5	44.5	15	29	16	18	52	144.5
LX-CU2-HV-0120-M16	120	M16	17	44.5	15	29	16	18	52	144.5
LX-CU2-HV-0120-M18	120	M18	19	44.5	15	29	16	18	52	144.5
LX-CU2-HV-0120-M20	120	M20	21	44.5	15	29	16	18	52	144.5
LX-CU2-HV-0150-M08	150	M8	8.4	44.5	16.5	32	14	16	56.5	144.5
LX-CU2-HV-0150-M10	150	M10	10.5	44.5	16.5	32	14	16	56.5	144.5
LX-CU2-HV-0150-M12	150	M12	13	44.5	16.5	32	14	16	56.5	144.5
LX-CU2-HV-0150-M14	150	M14	14.5	44.5	16.5	32	14	16	56.5	144.5
LX-CU2-HV-0150-M16	150	M16	17	44.5	16.5	32	14	16	56.5	144.5
LX-CU2-HV-0150-M18	150	M18	19	44.5	16.5	32	14	16	56.5	144.5
LX-CU2-HV-0150-M20	150	M20	21	44.5	16.5	32	14	16	56.5	144.5
LX-CU2-HV-0185-M08	185	M8	8.4	44.5	18.5	34	16	18	65	156
LX-CU2-HV-0185-M10	185	M10	10.5	44.5	18.5	34	16	18	65	156
LX-CU2-HV-0185-M12	185	M12	13	44.5	18.5	34	16	18	65	156
LX-CU2-HV-0185-M14	185	M14	14.5	44.5	18.5	34	16	18	65	156
LX-CU2-HV-0185-M16	185	M16	17	44.5	18.5	34	16	18	65	156
LX-CU2-HV-0185-M18	185	M18	19	44.5	18.5	34	16	18	65	156
LX-CU2-HV-0185-M20	185	M20	21	44.5	18.5	34	16	18	65	156
LX-CU2-HV-0240-M08	240	M8	8.4	44.5	21	38	16	20	65	160
LX-CU2-HV-0240-M10	240	M10	10.5	44.5	21	38	16	20	65	160
LX-CU2-HV-0240-M12	240	M12	13	44.5	21	38	16	20	65	160
LX-CU2-HV-0240-M14	240	M14	14.5	44.5	21	38	16	20	65	160
LX-CU2-HV-0240-M16	240	M16	17	44.5	21	38	16	20	65	160
LX-CU2-HV-0240-M18	240	M18	19	44.5	21	38	16	20	65	160
LX-CU2-HV-0240-M20	240	M20	21	44.5	21	38	16	20	65	160
LX-CU2-HV-0300-M08	300	M8	8.4	44.5	23.5	45	17	19	79.5	175
LX-CU2-HV-0300-M10	300	M10	10.5	44.5	23.5	45	17	19	79.5	175
LX-CU2-HV-0300-M12	300	M12	13	44.5	23.5	45	17	19	79.5	175
LX-CU2-HV-0300-M14	300	M14	14.5	44.5	23.5	45	17	19	79.5	175
LX-CU2-HV-0300-M16	300	M16	17	44.5	23.5	45	17	19	79.5	175
LX-CU2-HV-0300-M18	300	M18	19	44.5	23.5	45	17	19	79.5	175

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

Two Hole Heavy Duty

Catalogue Code	Sq.mm	Stud	Dimensions (mm)							
			Stud Hole	Hole Spacing	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE		ØA	D	G	H	B	J
LX-CU2-HV-0300-M20	300	M20	21	44.5	23.5	45	17	19	79.5	175
LX-CU2-HV-0400-M10	400	M10	10.5	44.5	27	53	17	19	81	182.5
LX-CU2-HV-0400-M12	400	M12	13	44.5	27	53	17	19	81	182.5
LX-CU2-HV-0400-M14	400	M14	14.5	44.5	27	53	17	19	81	182.5
LX-CU2-HV-0400-M16	400	M16	17	44.5	27	53	17	19	81	182.5
LX-CU2-HV-0400-M18	400	M18	19	44.5	27	53	17	19	81	182.5
LX-CU2-HV-0400-M20	400	M20	21	44.5	27	53	17	19	81	182.5
LX-CU2-HV-0500-M10	500	M10	10.5	44.5	30.3	57	20	20	85.5	194.5
LX-CU2-HV-0500-M12	500	M12	13	44.5	30.3	57	20	20	85.5	194.5
LX-CU2-HV-0500-M14	500	M14	14.5	44.5	30.3	57	20	20	85.5	194.5
LX-CU2-HV-0500-M16	500	M16	17	44.5	30.3	57	20	20	85.5	194.5
LX-CU2-HV-0500-M18	500	M18	19	44.5	30.3	57	20	20	85.5	194.5
LX-CU2-HV-0500-M20	500	M20	21	44.5	30.3	57	20	20	85.5	194.5
LX-CU2-HV-0630-M10	630	M10	10.5	44.5	33.4	61	20	20	95.5	206.5
LX-CU2-HV-0630-M12	630	M12	13	44.5	33.4	61	20	20	95.5	206.5
LX-CU2-HV-0630-M14	630	M14	14.5	44.5	33.4	61	20	20	95.5	206.5
LX-CU2-HV-0630-M16	630	M16	17	44.5	33.4	61	20	20	95.5	206.5
LX-CU2-HV-0630-M18	630	M18	19	44.5	33.4	61	20	20	95.5	206.5
LX-CU2-HV-0630-M20	630	M20	21	44.5	33.4	61	20	20	95.5	206.5

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

Two Hole Long Barrel

Catalogue Code	Sq.mm	Stud	Dimensions (mm)							
			Stud Hole	Hole Spacing	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE		ØA	D	G	H	B	J
LX-CU2-LB-0006-M06	6	M6	6.5	44.5	3.8	12	7	7	15	76
LX-CU2-LB-0006-M08	6	M8	8.4	44.5	3.8	12	7	7	15	76
LX-CU2-LB-0010-M06	10	M6	6.5	44.5	4.5	12	7	7	15	78.5
LX-CU2-LB-0010-M08	10	M8	8.4	44.5	4.5	12	7	7	15	78.5
LX-CU2-LB-0010-M10	10	M10	10.5	44.5	4.5	15	10	10	15	84.5
LX-CU2-LB-0010-M12	10	M12	13	44.5	4.5	17	10	12	15	86.5
LX-CU2-LB-0016-M06	16	M6	6.5	44.5	5.4	12	7	7	18	79.5
LX-CU2-LB-0016-M08	16	M8	8.4	44.5	5.4	12	7	7	18	79.5
LX-CU2-LB-0016-M10	16	M10	10.5	44.5	5.4	15	7	7	18	79.5
LX-CU2-LB-0016-M12	16	M12	13	44.5	5.4	17	10	12	18	85.5
LX-CU2-LB-0025-M08	25	M8	8.4	44.5	6.8	13	8	12	16	85.5
LX-CU2-LB-0025-M10	25	M10	10.5	44.5	6.8	15	8	12	16	85.5
LX-CU2-LB-0025-M12	25	M12	13	44.5	6.8	17	8	12	16	85.5
LX-CU2-LB-0035-M08	35	M8	8.4	44.5	8.2	16	9	14	20	92.5
LX-CU2-LB-0035-M10	35	M10	10.5	44.5	8.2	16	9	14	20	92.5
LX-CU2-LB-0035-M12	35	M12	13	44.5	8.2	16	9	14	20	92.5
LX-CU2-LB-0050-M08	50	M8	8.4	44.5	9.5	18	10	16	26	103.5
LX-CU2-LB-0050-M10	50	M10	10.5	44.5	9.5	18	10	16	26	103.5
LX-CU2-LB-0050-M12	50	M12	13	44.5	9.5	20	10	16	26	103.5
LX-CU2-LB-0050-M14	50	M14	14.5	44.5	9.5	20	10	16	26	103.5
LX-CU2-LB-0070-M08	70	M8	8.4	44.5	11.3	21	12	19	28	110.5
LX-CU2-LB-0070-M10	70	M10	10.5	44.5	11.3	21	12	19	28	110.5
LX-CU2-LB-0070-M12	70	M12	13	44.5	11.3	21	12	19	28	110.5
LX-CU2-LB-0070-M14	70	M14	14.5	44.5	11.3	22	12	14.5	28	110.5
LX-CU2-LB-0070-M16	70	M16	17	44.5	11.3	21	12	16.5	28	110.5
LX-CU2-LB-0095-M08	95	M8	8.4	44.5	13.5	25	12	20	32	118.5
LX-CU2-LB-0095-M10	95	M10	10.5	44.5	13.5	25	12	20	32	118.5
LX-CU2-LB-0095-M12	95	M12	13	44.5	13.5	25	12	20	32	118.5
LX-CU2-LB-0095-M14	95	M14	14.5	44.5	13.5	25	14	19	32	119.5

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

Two Hole Long Barrel

Catalogue Code	Sq.mm	Stud	Dimensions (mm)							
			Stud Hole	Hole Spacing	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE		ØA	D	G	H	B	J
LX-CU2-LB-0095-M16	95	M16	17	44.5	13.5	25	14	19	32	119.5
LX-CU2-LB-0095-M18	95	M18	19	44.5	13.5	25	14	19	32	119.5
LX-CU2-LB-0120-M08	120	M8	8.4	44.5	15	28	14	23	35	126.5
LX-CU2-LB-0120-M10	120	M10	10.5	44.5	15	28	14	23	35	126.5
LX-CU2-LB-0120-M12	120	M12	13	44.5	15	28	14	23	35	126.5
LX-CU2-LB-0120-M14	120	M14	14.5	44.5	15	28	14	23	35	126.5
LX-CU2-LB-0120-M16	120	M16	17	44.5	15	28	14	23	35	126.5
LX-CU2-LB-0120-M18	120	M18	19	44.5	15	28	14	23	35	126.5
LX-CU2-LB-0120-M20	120	M20	21	44.5	15	28	14	23	35	126.5
LX-CU2-LB-0150-M08	150	M8	8.4	44.5	16.5	30	14	24	38	130.5
LX-CU2-LB-0150-M10	150	M10	10.5	44.5	16.5	30	14	24	38	130.5
LX-CU2-LB-0150-M12	150	M12	13	44.5	16.5	30	14	24	38	130.5
LX-CU2-LB-0150-M14	150	M14	14.5	44.5	16.5	30	14	24	38	130.5
LX-CU2-LB-0150-M16	150	M16	17	44.5	16.5	30	14	24	38	130.5
LX-CU2-LB-0150-M18	150	M18	19	44.5	16.5	30	14	24	38	130.5
LX-CU2-LB-0150-M20	150	M20	21	44.5	16.5	30	14	24	38	130.5
LX-CU2-LB-0185-M08	185	M8	8.4	44.5	18.5	34	17	23	43	139.5
LX-CU2-LB-0185-M10	185	M10	10.5	44.5	18.5	34	17	23	43	139.5
LX-CU2-LB-0185-M12	185	M12	13	44.5	18.5	34	17	23	43	139.5
LX-CU2-LB-0185-M14	185	M14	14.5	44.5	18.5	34	17	23	43	139.5
LX-CU2-LB-0185-M16	185	M16	17	44.5	18.5	34	17	23	43	139.5
LX-CU2-LB-0185-M18	185	M18	19	44.5	18.5	34	17	23	43	139.5
LX-CU2-LB-0185-M20	185	M20	21	44.5	18.5	34	17	23	43	139.5
LX-CU2-LB-0240-M08	240	M8	8.4	44.5	21	38	20	30	50	156.5
LX-CU2-LB-0240-M10	240	M10	10.5	44.5	21	38	20	30	50	156.5
LX-CU2-LB-0240-M12	240	M12	13	44.5	21	38	20	30	50	156.5
LX-CU2-LB-0240-M14	240	M14	14.5	44.5	21	38	20	30	50	156.5
LX-CU2-LB-0240-M16	240	M16	17	44.5	21	38	20	30	50	156.5
LX-CU2-LB-0240-M18	240	M18	19	44.5	21	38	20	30	50	156.5
LX-CU2-LB-0240-M20	240	M20	21	44.5	21	38	20	30	50	156.5
LX-CU2-LB-0300-M10	300	M10	10.5	44.5	23.5	43	20	32	54	164.5
LX-CU2-LB-0300-M12	300	M12	13	44.5	23.5	43	20	32	54	164.5
LX-CU2-LB-0300-M14	300	M14	14.5	44.5	23.5	43	20	32	54	164.5

COPPER CABLE LUGS

Two Hole Long Barrel

Catalogue Code	Sq.mm	Stud	Dimensions (mm)							
			Stud Hole	Hole Spacing	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE		ØA	D	G	H	B	J
LX-CU2-LB-0300-M16	300	M16	17	44.5	23.5	43	20	32	54	164.5
LX-CU2-LB-0300-M18	300	M18	19	44.5	23.5	43	20	32	54	164.5
LX-CU2-LB-0300-M20	300	M20	21	44.5	23.5	43	20	32	54	164.5
LX-CU2-LB-0400-M10	400	M10	10.5	44.5	28.5	52.5	22	34	62	178.5
LX-CU2-LB-0400-M12	400	M12	13	44.5	28.5	52.5	22	34	62	178.5
LX-CU2-LB-0400-M14	400	M14	14.5	44.5	28.5	52.5	22	34	62	178.5
LX-CU2-LB-0400-M16	400	M16	17	44.5	28.5	52.5	22	34	62	178.5
LX-CU2-LB-0400-M18	400	M18	19	44.5	28.5	52.5	22	34	62	178.5
LX-CU2-LB-0400-M20	400	M20	21	44.5	28.5	52.5	22	34	62	178.5
LX-CU2-LB-0500-M10	500	M10	10.5	44.5	30	56	22	28	58	178.5
LX-CU2-LB-0500-M12	500	M12	13	44.5	30	56	22	28	58	178.5
LX-CU2-LB-0500-M14	500	M14	14.5	44.5	30	56	22	28	58	178.5
LX-CU2-LB-0500-M16	500	M16	17	44.5	30	56	22	28	58	178.5
LX-CU2-LB-0500-M18	500	M18	19	44.5	30	56	22	28	58	178.5
LX-CU2-LB-0500-M20	500	M20	21	44.5	30	56	22	28	58	178.5
LX-CU2-LB-0630-M10	630	M10	10.5	44.5	35	63.8	30	30	78	202.5
LX-CU2-LB-0630-M12	630	M12	13	44.5	35	63.8	30	30	78	202.5
LX-CU2-LB-0630-M14	630	M14	14.5	44.5	35	63.8	30	30	78	202.5
LX-CU2-LB-0630-M16	630	M16	17	44.5	35	63.8	30	30	78	202.5
LX-CU2-LB-0630-M18	630	M18	19	44.5	35	63.8	30	30	78	202.5
LX-CU2-LB-0630-M20	630	M20	21	44.5	35	63.8	30	30	78	202.5
LX-CU2-LB-0800-M10	800	M10	10.5	44.5	39	72	22	22	97	208
LX-CU2-LB-0800-M12	800	M12	13	44.5	39	72	22	22	97	208
LX-CU2-LB-0800-M14	800	M14	14.5	44.5	39	72	22	22	97	208
LX-CU2-LB-0800-M16	800	M16	17	44.5	39	72	22	22	97	212
LX-CU2-LB-0800-M20	800	M20	21	44.5	39	72	22	22	97	212
LX-CU2-LB-1000-M10	1000	M10	10.5	44.5	44	79	22	22	126	238
LX-CU2-LB-1000-M12	1000	M12	13	44.5	44	79	22	22	126	238
LX-CU2-LB-1000-M14	1000	M14	14.5	44.5	44	79	22	22	126	238
LX-CU2-LB-1000-M16	1000	M16	17	44.5	44	79	22	22	126	242
LX-CU2-LB-1000-M20	1000	M20	21	44.5	44	79	22	22	126	242

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

Two Hole Long Barrel Heavy Duty

Catalogue Code	Sq.mm	Stud	Dimensions (mm)							
			Stud Hole	Hole Spacing	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE		ØA	D	G	H	B	J
LX-CU2-LHV-0010-M05	10	M5	5.5	44.5	4.5	11	7.5	7	18	83
LX-CU2-LHV-0010-M06	10	M6	6.5	44.5	4.5	11	7.5	7	18	83
LX-CU2-LHV-0016-M05	16	M5	5.5	44.5	5.4	12	7.5	7	28	93
LX-CU2-LHV-0016-M06	16	M6	6.5	44.5	5.4	12	7.5	7	28	93
LX-CU2-LHV-0025-M06	25	M6	6.5	44.5	6.8	13	15	17	31.2	117.2
LX-CU2-LHV-0025-M08	25	M8	8.4	44.5	6.8	13	15	17	31.2	117.2
LX-CU2-LHV-0035-M06	35	M6	6.5	44.5	8.2	16	15	17	28	115
LX-CU2-LHV-0035-M08	35	M8	8.4	44.5	8.2	16	15	17	28	115
LX-CU2-LHV-0035-M10	35	M10	10.5	44.5	8.2	16	15	17	28	115
LX-CU2-LHV-0050-M06	50	M6	6.5	44.5	9.5	18	14	16	33	117.5
LX-CU2-LHV-0050-M08	50	M8	8.4	44.5	9.5	18	14	16	33	117.5
LX-CU2-LHV-0050-M10	50	M10	10.5	44.5	9.5	18	14	16	33	117.5
LX-CU2-LHV-0050-M12	50	M12	13	44.5	9.5	18	14	16	33	117.5
LX-CU2-LHV-0070-M08	70	M8	8.4	44.5	11.3	21	14	16	37.6	121.6
LX-CU2-LHV-0070-M10	70	M10	10.5	44.5	11.3	21	14	16	37.6	121.6
LX-CU2-LHV-0070-M12	70	M12	13	44.5	11.3	21	14	16	37.6	121.6
LX-CU2-LHV-0070-M14	70	M14	14.5	44.5	11.3	21	14	16	37.6	121.6
LX-CU2-LHV-0095-M08	95	M8	8.4	44.5	13.5	25	16	18	40	132.5
LX-CU2-LHV-0095-M10	95	M10	10.5	44.5	13.5	25	16	18	40	132.5
LX-CU2-LHV-0095-M12	95	M12	13	44.5	13.5	25	16	18	40	132.5
LX-CU2-LHV-0095-M14	95	M14	14.5	44.5	13.5	25	16	18	40	132.5
LX-CU2-LHV-0095-M16	95	M16	17	44.5	13.5	25	16	18	40	132.5

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

Two Hole Long Barrel Heavy Duty

Catalogue Code	Sq.mm	Stud	Dimensions (mm)							
			Stud Hole	Hole Spacing	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE		ØA	D	G	H	B	J
LX-CU2-LHV-0120-M08	120	M8	8.4	44.5	14.2	25.5	16	18	41.9	134.4
LX-CU2-LHV-0120-M10	120	M10	10.5	44.5	14.2	25.5	16	18	41.9	134.4
LX-CU2-LHV-0120-M12	120	M12	13	44.5	14.2	25.5	16	18	41.9	134.4
LX-CU2-LHV-0120-M14	120	M14	14.5	44.5	14.2	25.5	16	18	41.9	134.4
LX-CU2-LHV-0120-M16	120	M16	17	44.5	14.2	25.5	16	18	41.9	134.4
LX-CU2-LHV-0150-M08	150	M8	8.4	44.5	16.5	30	14	16	53	141
LX-CU2-LHV-0150-M10	150	M10	10.5	44.5	16.5	30	14	16	53	141
LX-CU2-LHV-0150-M12	150	M12	13	44.5	16.5	30	14	16	53	141
LX-CU2-LHV-0150-M14	150	M14	14.5	44.5	16.5	30	14	16	53	141
LX-CU2-LHV-0150-M16	150	M16	17	44.5	16.5	30	14	16	53	141
LX-CU2-LHV-0150-M18	150	M18	19	44.5	16.5	30	14	16	53	141
LX-CU2-LHV-0150-M20	150	M20	21	44.5	16.5	30	14	16	53	141
LX-CU2-LHV-0185-M08	185	M8	8.4	44.5	18.5	34	16	18	54	145
LX-CU2-LHV-0185-M10	185	M10	10.5	44.5	18.5	34	16	18	54	145
LX-CU2-LHV-0185-M12	185	M12	13	44.5	18.5	34	16	18	54	145
LX-CU2-LHV-0185-M14	185	M14	14.5	44.5	18.5	34	16	18	54	145
LX-CU2-LHV-0185-M16	185	M16	17	44.5	18.5	34	16	18	54	145
LX-CU2-LHV-0185-M18	185	M18	19	44.5	18.5	34	16	18	54	145
LX-CU2-LHV-0185-M20	185	M20	21	44.5	18.5	34	16	18	54	145
LX-CU2-LHV-0240-M08	240	M8	8.4	44.5	21	38	16	20	64.7	159.7
LX-CU2-LHV-0240-M10	240	M10	10.5	44.5	21	38	16	20	64.7	159.7
LX-CU2-LHV-0240-M12	240	M12	13	44.5	21	38	16	20	64.7	159.7
LX-CU2-LHV-0240-M14	240	M14	14.5	44.5	21	38	16	20	64.7	159.7
LX-CU2-LHV-0240-M16	240	M16	17	44.5	21	38	16	20	64.7	159.7
LX-CU2-LHV-0240-M18	240	M18	19	44.5	21	38	16	20	64.7	159.7
LX-CU2-LHV-0240-M20	240	M20	21	44.5	21	38	16	20	64.7	159.7

LUGX™
THE POWER OF PERFECT GRIP

COPPER CABLE LUGS

Two Hole Long Barrel Heavy Duty

Catalogue Code	Sq.mm	Stud	Dimensions (mm)							
			Stud Hole	Hole Spacing	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE		ØA	D	G	H	B	J
LX-CU2-LHV-0300-M10	300	M10	10.5	44.5	23.5	43	22	22	74	181.5
LX-CU2-LHV-0300-M12	300	M12	13	44.5	23.5	43	22	22	74	181.5
LX-CU2-LHV-0300-M14	300	M14	14.5	44.5	23.5	43	22	22	74	181.5
LX-CU2-LHV-0300-M16	300	M16	17	44.5	23.5	43	22	22	74	181.5
LX-CU2-LHV-0300-M18	300	M18	19	44.5	23.5	43	22	22	74	181.5
LX-CU2-LHV-0300-M20	300	M20	21	44.5	23.5	43	22	22	74	181.5
LX-CU2-LHV-0400-M10	400	M10	10.5	44.5	28.5	52.5	17	19	84	185.5
LX-CU2-LHV-0400-M12	400	M12	13	44.5	28.5	52.5	17	19	84	185.5
LX-CU2-LHV-0400-M14	400	M14	14.5	44.5	28.5	52.5	17	19	84	185.5
LX-CU2-LHV-0400-M16	400	M16	17	44.5	28.5	52.5	17	19	84	185.5
LX-CU2-LHV-0400-M18	400	M18	19	44.5	28.5	52.5	17	19	84	185.5
LX-CU2-LHV-0400-M20	400	M20	21	44.5	28.5	52.5	17	19	84	185.5
LX-CU2-LHV-0500-M10	500	M10	10.5	44.5	30	56	20	20	85	195
LX-CU2-LHV-0500-M12	500	M12	13	44.5	30	56	20	20	85	195
LX-CU2-LHV-0500-M14	500	M14	14.5	44.5	30	56	20	20	85	195
LX-CU2-LHV-0500-M16	500	M16	17	44.5	30	56	20	20	85	195
LX-CU2-LHV-0500-M18	500	M18	19	44.5	30	56	20	20	85	195
LX-CU2-LHV-0500-M20	500	M20	21	44.5	30	56	20	20	85	195

COPPER CABLE LUGS

Four Hole Transformer

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total
			ØE	ØA	D	G	H	B	J
LX-CU4-0400-M10	400	M10	10.5	28.5	52	25	35	44	118
LX-CU4-0400-M12	400	M12	13	28.5	52	25	35	44	118
LX-CU4-0500-M10	500	M10	10.5	30	56	25	35	48	124
LX-CU4-0500-M12	500	M12	13	30	56	25	35	48	124
LX-CU4-0500-M14	500	M14	14.5	30	56	25	35	48	124
LX-CU4-0630-M10	630	M10	10.5	35	65	25	35	56	146
LX-CU4-0630-M12	630	M12	13	35	65	25	35	56	146
LX-CU4-0630-M14	630	M14	14.5	35	65	25	35	56	146
LX-CU4-0630-M16	630	M16	17	35	65	25	35	56	146
LX-CU4-0800-M20	800	M20	21	39	72	25	35	78	170
LX-CU4-1000-M20	1000	M20	21	43	78.5	25	35	90	200

LUGX™
THE POWER OF PERFECT GRIP

ALUMINIUM CRIMPING TERMINALS LUGS

One Hole Standard

Catalogue Code	Sq.mm	Stud	Dimensions (mm)					
			Stud Hole	Barrel ID	Barrel Mouth	Palm Width	Barrel Length	Total
			ØE	ØA	C	D	B	J
LX-ALT1-02P5-M03	2.5	M03	3.2	2	5.5	7	7	18
LX-ALT1-02P5-M35	2.5	M35	3.7	2.6	5.5	7	7	18
LX-ALT1-0004-M04	4	M04	4.2	2.9	5.5	7	7	18
LX-ALT1-0004-M05	4	M05	5.2	2.9	5.5	9	7	24
LX-ALT1-0006-M05	6	M05	5.2	3.5	5.5	8	7	24
LX-ALT1-0006-M06	6	M06	6.4	3.5	5.5	11	7	24
LX-ALT1-0010-M06	10	M06	6.4	4.4	7.4	11	9	30
LX-ALT1-0010-M08	10	M08	8.2	4.4	7.4	13	9	30
LX-ALT1-0016-M06	16	M06	6.4	5.4	8.3	11	13	37
LX-ALT1-0016-M08	16	M08	8.2	5.4	8.3	14	13	37
LX-ALT1-0016-M10	16	M10	10.2	5.4	8.3	15	13	37
LX-ALT1-0025-M06	25	M06	6.4	7	9.7	14	16	44
LX-ALT1-0025-M08	25	M08	8.2	7	9.7	14	16	44
LX-ALT1-0025-M10	25	M10	10.2	7	9.7	17	16	44
LX-ALT1-0025-M12	25	M12	12.7	7	9.7	18	16	44
LX-ALT1-0035-M06	35	M06	6.4	8	10.8	15	18	47
LX-ALT1-0035-M08	35	M08	8.2	8	10.8	15	18	47
LX-ALT1-0035-M10	35	M10	10.2	8	10.8	17	18	47
LX-ALT1-0050-M08	50	M08	8.2	9.3	13	18	22	54
LX-ALT1-0050-M10	50	M10	10.2	9.3	13	18	22	54
LX-ALT1-0050-M12	50	M12	12.7	9.3	13	18	22	54
LX-ALT1-0070-M08	70	M08	8.2	11.1	15.4	22	26	60
LX-ALT1-0070-M10	70	M10	10.2	11.1	15.4	22	26	60
LX-ALT1-0070-M12	70	M12	12.7	11.1	15.4	22	26	60
LX-ALT1-0095-M10	95	M10	10.2	13	17.1	25	28	64
LX-ALT1-0095-M12	95	M12	12.7	13	17.1	25	28	64

ALUMINIUM CRIMPING TERMINALS LUGS

One Hole Standard

Catalogue Code	Sq.mm	Stud	Dimensions (mm)					
			Stud Hole	Barrel ID	Barrel Mouth	Palm Width	Barrel Length	Total
			ØE	ØA	C	D	B	J
LX-ALT1-0095-M16	95	M16	16.2	13	17.1	25	28	64
LX-ALT1-0120-M10	120	M10	10.2	14.8	19.6	28	32	73
LX-ALT1-0120-M12	120	M12	12.7	14.8	19.6	28	32	73
LX-ALT1-0120-M16	120	M16	16.2	14.8	19.6	28	32	73
LX-ALT1-0150-M10	150	M10	10.2	16.6	21.4	31	34	79
LX-ALT1-0150-M12	150	M12	12.7	16.6	21.4	31	34	79
LX-ALT1-0150-M16	150	M16	16.2	16.6	21.4	31	34	79
LX-ALT1-0185-M10	185	M10	10.2	18.5	24	34	36	84
LX-ALT1-0185-M12	185	M12	12.7	18.5	24	34	36	84
LX-ALT1-0185-M16	185	M16	16.2	18.5	24	34	36	84
LX-ALT1-0240-M12	240	M12	12.7	22	28	40	44	102
LX-ALT1-0240-M16	240	M16	16.2	22	28	40	44	102
LX-ALT1-0240-M20	240	M20	20.3	22	28	40	44	102
LX-ALT1-0300-M16	300	M16	16.2	24	31	44.7	47	115
LX-ALT1-0300-M20	300	M20	20.3	24	31	44.7	47	115
LX-ALT1-0400-M20	400	M20	20.3	28	36	51	56	130
LX-ALT1-0500-M20	500	M20	20.3	31	41	58	60	140
LX-ALT1-0630-M20	630	M20	20.3	35	46	66	69	154
LX-ALT1-0800-BL	800	BL	–	39	51	73	77	180
LX-ALT1-1000-BL	1000	BL	–	43.5	57	81	100	220

LUGX™
THE POWER OF PERFECT GRIP

ALUMINIUM CRIMPING TERMINALS LUGS

Two Hole Standard

Catalogue Code	Sq.mm	Stud	Dimensions (mm)						
			Stud Hole	Barrel ID	Barrel Mouth	Palm Width	Hole Pitch	Barrel Length	Total
			ØE	ØA	C	D	G	B	J
LX-ALT2-0025-M08	25	M08	8.2	7	9.7	14	45	16	88
LX-ALT2-0035-M08	35	M08	8.2	8	10.8	15	45	18	90
LX-ALT2-0050-M10	50	M10	10.2	9.3	13	18	45	22	100
LX-ALT2-0070-M10	70	M10	10.2	11.1	15.4	22	45	26	103
LX-ALT2-0095-M12	95	M12	12.7	13	17.1	25	45	28	111
LX-ALT2-0120-M12	120	M12	12.7	14.8	19.6	28	45	32	118
LX-ALT2-0150-M12	150	M12	12.7	16.6	21.4	31	45	34	120
LX-ALT2-0185-M12	185	M12	12.7	18.5	24	34	45	36	123
LX-ALT2-0240-M12	240	M12	12.7	22	28	40	45	44	137
LX-ALT2-0300-M16	300	M16	16.2	24	31	45	45	47	147
LX-ALT2-0400-M20	400	M20	20.3	28	36	51	45	56	157
LX-ALT2-0500-M20	500	M20	20.3	31	41	58	45	60	167
LX-ALT2-0630-M20	630	M20	20.3	35	46	66	45	69	178

ALUMINIUM CRIMPING TERMINALS LUGS

One Hole Long Barrel

Catalogue Code	Sq.mm	Stud	Dimensions (mm)					
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance	Barrel Length	Total
			ØE	ØA	D	G + H	B	J
LX-ALT1-LB-0025-M08	25	8.2	7.2	9.6	14	41	21	69
LX-ALT1-LB-0035-M08	35	8.2	8.3	11.1	16	50	22	79
LX-ALT1-LB-0050-M10	50	10.2	9.3	13.5	19.5	49	24	81
LX-ALT1-LB-0070-M10	70	10.2	10.2	14.5	20.5	62	26	96
LX-ALT1-LB-0095-M12	95	12.7	12	16.6	23.5	73	28	109
LX-ALT1-LB-0120-M12	120	12.7	13.7	19	26.5	73	30	114
LX-ALT1-LB-0150-M12	150	12.7	15.1	21.1	29.5	83	34	128
LX-ALT1-LB-0185-M12	185	12.7	16.6	23.9	33	83	36	131
LX-ALT1-LB-0240-M12	240	12.7	19.3	27.2	37.5	86	44	144
LX-ALT1-LB-0300-M20	300	20.3	21.8	30.2	42	89	54	157
LX-ALT1-LB-0400-M20	400	20.3	25	34.8	48	113	60	187
LX-ALT1-LB-0500-M20	500	20.3	28.2	39.1	54	125	64	205
LX-ALT1-LB-0630-M20	630	20.3	31.7	44.4	61	140	68	225
LX-ALT1-LB-0800-M20	800	20.3	35.7	49.5	68	147	78	250
LX-ALT1-LB-1000-M20	1000	20.3	41	56	77.5	160	90	280

LUGX™
THE POWER OF PERFECT GRIP

COPPER RING TERMINALS

Open Close Soldering Type

Catalogue Code	Sq.mm	Dimensions (mm)					
		Stud Hole	Barrel ID	Barrel Mouth	Palm Width	Barrel Length	Total
		ØE	ØA	C	D	B	J
LX-OCST-01P5-04	1.5	4.2	1.6	3.2	7	5	15
LX-OCST-02P5-05	2.5	5.2	2.3	3.9	9	6	18
LX-OCST-0004-05	4	5.2	2.8	4.8	9	6	20
LX-OCST-0006-06	6	6.5	3.6	5.6	12	7	24
LX-OCST-0010-06	10	6.5	4.4	6.4	12	9	27
LX-OCST-0016-08	16	8.2	5.4	7.8	15	11	32
LX-OCST-0025-08	25	8.2	7	10.2	15	14	36
LX-OCST-0035-08	35	8.2	8	11.2	18	15	41
LX-OCST-0050-10	50	10.2	9.5	13.1	24	18	50
LX-OCST-0070-10	70	10.2	11.8	15.8	28	23	58
LX-OCST-0095-12	95	12.7	13.5	18.7	32	25	66
LX-OCST-0120-12	120	12.7	15.5	21.1	34	29	73
LX-OCST-0150-12	150	12.7	16.5	22.9	38	30	79
LX-OCST-0185-16	185	16.2	18.5	25.7	42	35	87
LX-OCST-0240-16	240	16.2	22.5	30.5	48	42	100
LX-OCST-0300-20	300	20.3	25	34	54	45	110
LX-OCST-0400-20	400	20.3	29.5	39.5	62	54	125
LX-OCST-0500-20	500	20.3	32	42.8	62	58	137
LX-OCST-0625-20	625	20.3	36	46.8	70	65	148

BI-METALLIC TERMINALS

Friction Welded Type

Catalogue Code	Sq.mm	Dimensions (mm)					
		Stud Hole	Barrel ID	Barrel Mouth	Palm Width	Barrel Length	Total
		ØE	ØA	C	D	B	J
LX-BMT-FWT-0016-10	16	10.5	5.5	12	18	30	70
LX-BMT-FWT-0025-10	25	10.5	7.5	12	18	30	70
LX-BMT-FWT-0035-10	35	10.5	8	14	20	30	70
LX-BMT-FWT-0050-10	50	10.5	9.8	16	20	32	80
LX-BMT-FWT-0070-10	70	10.5	11.2	18.5	24	45	90
LX-BMT-FWT-0095-12	95	13	13.5	21	24	43	92
LX-BMT-FWT-0120-12	120	13	15	23	25	55	100
LX-BMT-FWT-0150-12	150	13	16.5	25	25	60	105
LX-BMT-FWT-0150-12	185	13	18.3	28.5	30	60	120
LX-BMT-FWT-0185-12	240	13	21	32	30	60	120
LX-BMT-FWT-0185-16	240	17	21	32	30	60	120
LX-BMT-FWT-0300-12	300	13	22.5	34	36	62	130
LX-BMT-FWT-0300-16	300	17	22.5	34	36	62	130
LX-BMT-FWT-0300-20	400	13	26.5	38	36	75	145
LX-BMT-FWT-0630-20	400	17	26.5	38	36	75	145
LX-BMT-FWT-0500-12	500	13	30	42	36	80	152
LX-BMT-FWT-0630-12	630	13	34	46	36	70	146
LX-BMT-FWT-0800-12	800	13	39	54	50	115	230
LX-BMT-FWT-1000-12	1000	13	43	58	50	115	230

LUGX™
THE POWER OF PERFECT GRIP

BI-METALLIC TERMINALS

Copper Ring Type

Catalogue Code	Sq.mm	Dimensions (mm)							
		Stud Hole	Barrel ID	Barrel Mouth	Palm Width	Stud Centre Distance		Barrel Length	Total
		ØE	ØA	C	D	G	H	B	J
LX-BMT-CRT-0150-12	150	13	16.5	26	103	35	18.5	21.5	121
LX-BMT-CRT-0185-12	185	13	18.5	29	106	40	22	22.5	128
LX-BMT-CRT-0185-16	185	17	18.5	29	106	40	22	22.5	128
LX-BMT-CRT-0300-12	300	13	23.5	34.5	124	51	24.5	24.5	148
LX-BMT-CRT-0300-16	300	17	23.5	34.5	124	51	24.5	24.5	148
LX-BMT-CRT-0300-20	300	21	23.5	34.5	124	51	24.5	24.5	148
LX-BMT-CRT-0630-20	630	21	34	46	127	65	33	33	160

COPPER CRIMPING PIN TERMINALS

Non-Insulated and Insulated

Catalogue Code			Sq.mm	Type	Dimensions (mm)							
Bare	Insulated PI	Insulated PD			Barrel ID	Barrel Mouth	Palm Width	Barrel Length	Total			
					ØA	C	D	B	J	J-1	A-1	J-1
LX-CPT-0P75-T01	LX-CPI-0P75-T01	LX-CPD-0P75-T01	0.5–0.75	I	1.4	2.6	1.6	5	17	10	3.6	10
LX-CPT-01P5-T01	LX-CPI-01P5-T01	LX-CPD-01P5-T01	1–1.5	I	1.6	3.2	1.9	5	17	10	3.6	10
LX-CPT-01P5-T02	LX-CPI-01P5-T02	LX-CPD-01P5-T02	1–1.5	II	1.6	3.2	3.1	5	17	10	3.6	10
LX-CPT-02P5-T01	LX-CPI-02P5-T01	LX-CPD-02P5-T01	2.5	I	2.3	3.9	1.9	5	17	10	4.4	10
LX-CPT-02P5-T02	LX-CPI-02P5-T02	LX-CPD-02P5-T02	2.5	II	2.3	3.9	3.1	5	17	10	4.4	10
LX-CPT-0004-T01	LX-CPI-0004-T01	LX-CPD-0004-T01	4	I	2.9	4.9	2.7	6	20	14	6.4	15
LX-CPT-0004-T02	LX-CPI-0004-T02	LX-CPD-0004-T02	4	II	3.6	5.6	5.1	6	20	14	6.4	15
LX-CPT-0006-T01	LX-CPI-0006-T01	LX-CPD-0006-T01	6	I	3.6	5.6	2.7	6	20	14	6.4	15
LX-CPT-0006-T02	LX-CPI-0006-T02	LX-CPD-0006-T02	6	II	4	6	2.7	6	20	14	6.4	15
LX-CPT-0010-T03	LX-CPI-0010-T03	–	10	III	4.5	6.7	4.3	8	22	16	–	–
LX-CPT-0016-T03	LX-CPI-0016-T03	–	16	III	5.8	8.2	5.5	10	26	20	–	–
LX-CPT-0025-T03	–	–	25	III	7.5	11.1	7	11	31	-	–	–
LX-CPT-0035-T03	–	–	35	III	9	12.6	8	12	37	-	–	–
LX-CPT-0050-T03	–	–	50	III	10.5	14.1	9	16	42	-	–	–
LX-CPT-0070-T03	–	–	70	III	12	16	10	18	45	-	–	–
LX-CPT-0095-T03	–	–	95	III	13.8	18.7	11	21	52	-	–	–

LUGX™
THE POWER OF PERFECT GRIP

COPPER CRIMPING RING TERMINALS

Non-Insulated

Catalogue Code	Sq.mm	Stud	Dimensions (mm)					
			Stud Hole	Barrel ID	Barrel Mouth	Palm Width	Barrel Length	Total
			ØE	ØA	C	D	B	J
LX-CRT-0010-05A	10	M5	5.2	4.3	6.3	10	8	20
LX-CRT-0010-06A	10	M6	6.4	4.3	6.3	12	8	23
LX-CRT-0010-08A	10	M8	8.2	4.3	6.3	16	8	27
LX-CRT-0010-08B	10	M8	8.2	4.3	6.3	18	8	30
LX-CRT-0010-10A	10	M10	10.2	4.3	6.3	18	8	30
LX-CRT-0010-10B	10	M10	10.2	4.3	6.3	22	8	34
LX-CRT-0010-12A	10	M12	12.7	4.3	6.3	22	8	34
LX-CRT-0016-06A	16	M6	6.4	5.6	8	12	10	26
LX-CRT-0016-08A	16	M8	8.2	5.6	8	16	10	30
LX-CRT-0016-08B	16	M8	8.2	5.6	8	18	10	33
LX-CRT-0016-10A	16	M10	10.2	5.6	8	18	10	33
LX-CRT-0016-10B	16	M10	10.2	5.6	8	22	10	35
LX-CRT-0016-12A	16	M12	12.7	5.6	8	22	10	35
LX-CRT-0025-06A	25	M6	6.4	7.5	11.1	12	11	31
LX-CRT-0025-08A	25	M8	8.2	7.5	11.1	12	11	31
LX-CRT-0025-08B	25	M8	8.2	7.5	11.1	16	11	30
LX-CRT-0025-08C	25	M8	8.2	7.5	11.1	18	11	34
LX-CRT-0025-10A	25	M10	10.2	7.5	11.1	16	11	30
LX-CRT-0025-10B	25	M10	10.2	7.5	11.1	18	11	34
LX-CRT-0025-10C	25	M10	10.2	7.5	11.1	22	11	42
LX-CRT-0025-12A	25	M12	12.7	7.5	11.1	22	11	42
LX-CRT-0035-06A	35	M6	6.4	9	12.6	16	12	31
LX-CRT-0035-08A	35	M8	8.2	9	12.6	16	12	31
LX-CRT-0035-08B	35	M8	8.2	9	12.6	18	12	36
LX-CRT-0035-10A	35	M10	10.2	9	12.6	18	12	36

COPPER CRIMPING RING TERMINALS

Non-Insulated

Catalogue Code	Sq.mm	Stud	Dimensions (mm)					
			Stud Hole	Barrel ID	Barrel Mouth	Palm Width	Barrel Length	Total
			ØE	ØA	C	D	B	J
LX-CRT-0035-10B	35	M10	10.2	9	12.6	22	12	42
LX-CRT-0035-12A	35	M12	12.7	9	12.6	22	12	42
LX-CRT-0050-08A	50	M8	8.2	10.5	14.1	18	16	43
LX-CRT-0050-10A	50	M10	10.2	10.5	14.1	18	16	43
LX-CRT-0050-10B	50	M10	10.2	10.5	14.1	22	16	43
LX-CRT-0050-10C	50	M10	10.2	10.5	14.1	24	16	48
LX-CRT-0050-12A	50	M12	12.7	10.5	14.1	24	16	48
LX-CRT-0050-16A	50	M16	16.2	10.5	14.1	32	16	54
LX-CRT-0070-10A	70	M10	10.2	12	16	22	18	47
LX-CRT-0070-12A	70	M12	12.7	12	16	22	18	47
LX-CRT-0070-12B	70	M12	12.7	12	16	24	18	48
LX-CRT-0070-16A	70	M16	16.2	12	16	28	20	54
LX-CRT-0095-10A	95	M10	10.2	13.5	18.1	22	20	46
LX-CRT-0095-10B	95	M10	10.2	13.5	18.1	24	20	50
LX-CRT-0095-12A	95	M12	12.7	13.5	18.1	24	20	50
LX-CRT-0095-16A	95	M16	16.2	13.5	18.1	28	20	58
LX-CRT-0120-12A	120	M12	12.7	15	20.2	26	22	52
LX-CRT-0120-16A	120	M16	16.2	15	20.2	32	22	64
LX-CRT-0120-20A	120	M20	20.3	15	20.2	40	22	72
LX-CRT-0150-12A	150	M12	12.7	16.5	23.7	34	24	66
LX-CRT-0150-16A	150	M16	16.2	16.5	23.7	34	24	66
LX-CRT-0150-16B	150	M16	16.2	16.5	23.7	40	24	74
LX-CRT-0150-20A	150	M20	20.3	16.5	23.7	40	24	74

LUGX™
THE POWER OF PERFECT GRIP

COPPER CRIMPING FORK TERMINALS

Non-Insulated and Insulated

Catalogue Code	Sq.mm	Dimensions (mm)								
		Stud Hole	Barrel ID	Barrel Mouth	Palm Width	Barrel Length	Total			
		ØE	ØA	C	D	B	J	J-1	A-1	J-1
LX-CFT-075-035	0.5-0.75	3.5	1.4	2.6	6.6	5	14	10	3.6	10
LX-CFT-015-051	1-1.5	5.1	1.6	3.2	8	5	21	10	3.6	10
LX-CFT-015-041	1-1.5	4.1	1.6	3.2	7.5	5	17.5	10	3.6	10
LX-CFT-015-035	1-1.5	3.5	1.6	3.2	6.8	4	13	10	3.6	10
LX-CFT-015-030	1-1.5	3	2	2.8	6.2	5	13	10	3.6	10
LX-CFT-025-035	2.5	3.5	2.3	3.9	6.5	5	15	10	4.4	10
LX-CFT-025-041	2.5	4.1	2.3	3.9	7.5	5	18	10	4.4	10
LX-CFT-025-050	2.5	5	2.6	4.6	10.6	6.2	21	10	5.1	10
LX-CFT-046-031	4-6	3.1	3.5	5.5	6	6	15	14	6.4	15
LX-CFT-046-035	4-6	3.5	3.5	5.5	6	6	15	14	6.4	15
LX-CFT-010-065	10	6.5	4.5	6.9	16	8	27	16	7.4	17
LX-CFT-010-082	10	8.2	4.5	6.9	16	8	27	16	7.4	17

COPPER RING TONGUE FORK TERMINALS

Non-Insulated and Insulated

Catalogue Code	Sq.mm	Dimensions (mm)								
		Stud Hole	Barrel ID	Barrel Mouth	Palm Width	Barrel Length	Total			
		ØE	ØA	C	D	B	J	J-1	A-1	J-1
LX-CTFT-01P5-03A	1.5	3.1	1.6	3.2	6	5	14	10	3.6	10
LX-CTFT-01P5-35A	1.5	3.6	1.6	3.2	6	5	14	10	3.6	10
LX-CTFT-01P5-03B	1.5	3.1	1.6	3.2	6.8	5	13	10	3.6	10
LX-CTFT-01P5-35B	1.5	3.6	1.6	3.2	6.8	5	13	10	3.6	10
LX-CTFT-01P5-04A	1.5	4.1	1.6	3.2	7	5	14	10	3.6	10
LX-CTFT-01P5-04B	1.5	4.1	1.6	3.2	8	5	16	10	3.6	10
LX-CTFT-01P5-05A	1.5	5.1	1.6	3.2	10	5	18	10	3.6	10
LX-CTFT-01P5-06A	1.5	6.1	1.6	3.2	10	5	18	10	3.6	10
LX-CTFT-02P5-03A	2.5	3.1	2.3	3.9	6.5	5	12.7	10	4.4	10
LX-CTFT-02P5-35A	2.5	3.6	2.3	3.9	6.5	5	12.7	10	4.4	10
LX-CTFT-02P5-04A	2.5	4.1	2.3	3.9	8	5	16	10	4.4	10
LX-CTFT-02P5-05A	2.5	5.1	2.3	3.9	10	5	18	10	4.4	10
LX-CTFT-02P5-06A	2.5	6.1	2.3	3.9	10	5	18	10	4.4	10
LX-CTFT-0006-04A	4-6	4.1	3.5	5.5	8	6	17	14	6.4	15
LX-CTFT-0006-04B	4-6	4.1	3.5	5.5	10	6	19	14	6.4	15
LX-CTFT-0006-05A	4-6	5.1	3.5	5.5	10	6	19	14	6.4	15
LX-CTFT-0006-05B	4-6	5.1	3.5	5.5	12	6	22	14	6.4	15
LX-CTFT-0006-06A	4-6	6.1	3.5	5.5	12	6	22	14	6.4	15
LX-CTFT-0010-04A	10	4.1	4.3	6.3	10	8	22	16	6.8	17
LX-CTFT-0010-05A	10	5.1	4.3	6.3	10	8	22	16	6.8	17
LX-CTFT-0010-06A	10	6.1	4.3	6.3	12	8	23	16	6.8	17
LX-CTFT-0010-08A	10	8.1	4.3	6.3	16	8	27	16	6.8	17
LX-CTFT-0016-05A	16	5.1	5.6	8	10	10	24	-	-	-
LX-CTFT-0016-06A	16	6.1	5.6	8	12	10	26	-	-	-
LX-CTFT-0016-08A	16	8.1	5.6	8	16	10	30	-	-	-
LX-CTFT-0016-08B	16	8.1	5.6	8	18	10	33	-	-	-

WHY LUGX?

BUILT AROUND DEPENDABILITY
At LUGX, every connection matters.
Our approach combines:

QUALITY MATERIALS
Carefully selected materials for dependable performance.

PRECISION MANUFACTURING
Consistent manufacturing processes for reliable products.

QUALITY CONTROL
Thorough inspection to maintain product standards.

CUSTOMIZED SOLUTIONS
Products developed to meet specific application requirements.

TIMELY DELIVERY
Focused on helping customers keep projects on schedule.

CUSTOMER SUPPORT
A service-driven approach from requirement to delivery.

CNC Machined Components

PREMIUM PRECISION
Advanced CNC machining for accurate dimensions and consistent quality.

SUPERIOR FINISH
Copper, Stainless Steel, Aluminium and Chrome Steel options.

High Dimensional Accuracy

Custom Manufacturing

Reliable Performance

Precision manufactured for consistent quality.

Precision You Can Measure. Performance You Can Trust.

N GANDHI ADVANCE ENGINEERING PRIVATE LIMITED.
An ISO 9001:2015 Certified Company

CNC MACHINED COMPONENTS

Copper Precision Machined Components

Custom CNC machined parts, made to your drawing or sample

WHAT WE MAKE
NAEPL produces custom copper machined components strictly as per the drawings and samples supplied by the customer. The range covers terminals, pins, bushes, sleeves, nuts, connectors and other special machined parts. Each drawing is studied before production begins, and the parts are inspected while they are being machined and once more prior to despatch, which keeps dimensions, threads and finish uniform and leaves every lot ready to be assembled.

01
Capabilities
CNC turning, milling, drilling, threading and knurling to customer requirements.

02
Material
Grades such as C11000 (Cu-ETP, CW004A), C10200 (Cu-OF), C14500 (tellurium copper) and C18200 (chromium copper); other grades whenever the customer asks.

03
Finishing
Polishing, nickel plating, tin plating and passivation, available on request.

04
Input Files
CAD files (dwg, dxf, pdf, etc.), 3D files (step, stp, etc.) or a physical sample.

Prototype to repeat production. Precision copper machined parts for buyers who need dependable components, whether a single sample or ongoing production lots. Every drawing is examined before machining, so issues with tolerances, threads, wall thickness or finish are caught early, and critical dimensions are verified for each batch. Used in electrical and industrial applications.

Copper Component Range

Stepped Terminal Pin

Threaded-End Flanged Pin

Hex Nut / Hex Bush

Knurled Cap

Hose Nipple / Threaded Connector

Multi-Hole Flange Bush

Slotted Threaded Sleeve

Cross-Hole Block

Long Contact Pin / Tube Socket

Pictures shown are illustrative; every part is produced to the customer's drawing or sample.

Stainless Steel CNC Machined Components

Custom CNC machined parts, made to your drawing or sample

WHAT WE MAKE
NAEPL makes custom stainless steel CNC parts according to the customer's drawings and samples, including shafts, pins, bushes, sleeves, studs, nuts, rings, spacers, connectors and other special turned items. Drawings are reviewed ahead of production and machining sequences are carefully planned. Inspection takes place during machining and again before despatch, which holds dimensions, threads, concentricity, wall thickness and surface finish to requirement and ensures a proper fit in the customer's assembly.

01
Capabilities
CNC turning, milling, drilling, threading and finishing to customer requirements

02
Material
Grades 303, 304, 316, 316L, 410, 416, 420 and 17-4PH; any other grade if required.

03
Finishing
Polishing, electro polishing, passivation, nickel plating, bead blasting and brushing, on request.

04
Input Files
CAD files (dwg, dxf, pdf, etc.), 3D files (step, stp, etc.) or a physical sample.

Built for tough environments. Stainless steel is the preferred material wherever components must withstand corrosion, wear and harsh operating conditions. NAEPL turns shafts, pins, bushes, sleeves, studs, nuts, connectors and special parts for electrical, marine, industrial and engineering use. Tolerances, threads, wall thickness and finish are settled in advance, and critical dimensions are checked before despatch.

Stainless Steel Component Range

Flanged Threaded Bush

Flange Sleeve

Smooth Cylindrical Spacer / Sleeve

Outer-Threaded Bush

Internally Threaded Hex Adaptor

Hex-Stepped Threaded Pin

Collared Pin / Flanged Pin

Stepped Plunger Shaft

Pictures shown are illustrative; every part is produced to the customer's drawing or sample.

Aluminium CNC Machined Components

Custom CNC machined parts, made to your drawing or sample

WHAT WE MAKE
NAEPL produces custom aluminium machined components in various grades, strictly as per the drawings and samples supplied by the customer. The range includes precision turned parts, bushes, sleeves, pins, blocks, brackets, housings and other special machined components. Each drawing is studied before production, and parts are inspected during machining and again prior to despatch to maintain dimensional accuracy, hole positions, threads and finish.

01
Capabilities
CNC milling, turning, drilling, threading, tapping, boring, knurling and other precision machining to customer requirements.

02
Material
Aluminium grades including 1050, 2011, 2017, 2024, 5052, 5083, 6060, 6061, 6063, 6082, 7075 and other grades as per customer requirement.

03
Finishing
Anodising, hard anodising, plating, brushing, polishing, bead blasting, powder coating and other treatments as required.

04
Input Files
CAD files (dwg, dxf, pdf, etc.), 3D files (step, stp, etc.) or a physical sample.

Prototype to repeat production. Machined aluminium parts for buyers who need accurate, dependable components, whether a single sample or regular production lots. Every drawing is examined before machining begins, so issues with tolerances, hole positions, threads or surface finish are caught early, and critical dimensions are verified on each batch. All parts are non-standard and made as per the customer's drawing or sample.

Typical Machined Aluminium Components

 Pictures shown are illustrative; every part is produced to the customer's drawing or sample.

Chrome Steel CNC Machined Components

Custom CNC machined parts, made to your drawing or sample

WHAT WE MAKE
NAEPL manufactures custom chrome steel CNC components according to customer drawings and samples. The range includes shafts, pins, rollers, bushes, sleeves, studs, rings, spacers and other special machined parts. Components can be produced in chrome steel grades such as 52100 / 100Cr6 (EN31), 41Cr4 and 42CrMo4 (EN19), with heat treatment, grinding and surface finishing as required.

01 Capabilities
CNC turning, milling, drilling, threading and grinding to customer requirements.

02 Material
Chrome steel grades such as 52100 / 100Cr6 (EN31), 41Cr4 and 42CrMo4 (EN19); any other grade if required.

03 Finishing
Polishing, hardening and tempering, precision grinding, hard chrome plating and black oxide, on request.

04 Input Files
CAD files (dwg, dxf, pdf, etc.), 3D files (step, stp, etc.) or a physical sample.

Built for strength and wear resistance. Chrome steel is the preferred material wherever components must withstand heavy loads, abrasion and repeated stress. NAEPL machines shafts, pins, rollers, bushes, sleeves, studs, nuts and special parts for industrial, automotive and engineering use. Tolerances, threads, hardness and finish are settled in advance, and critical dimensions are checked before despatch.

Chrome Steel Component Range

Precision Shaft

Guide Pin

Hardened Bush

Threaded Component

Threaded Stud

Collar

Precision Sleeve

Pictures shown are illustrative; every part is produced to the customer's drawing or sample.

Sheet Metal Press Parts & Banding Solutions

PRECISION MANUFACTURING
Precision-formed sheet metal components with consistent dimensions and quality.

DURABLE CONSTRUCTION
Stainless steel, aluminium and other suitable materials.

Precision Pressed Parts

Custom Solutions

Strong & Reliable

**Precision formed. Securely connected.
Built for demanding applications.**

Shaped Right. Built Right

N GANDHI ADVANCE ENGINEERING PRIVATE LIMITED.
An ISO 9001:2015 Certified Company

SHEET METAL PRESS PARTS & BANDING SOLUTIONS

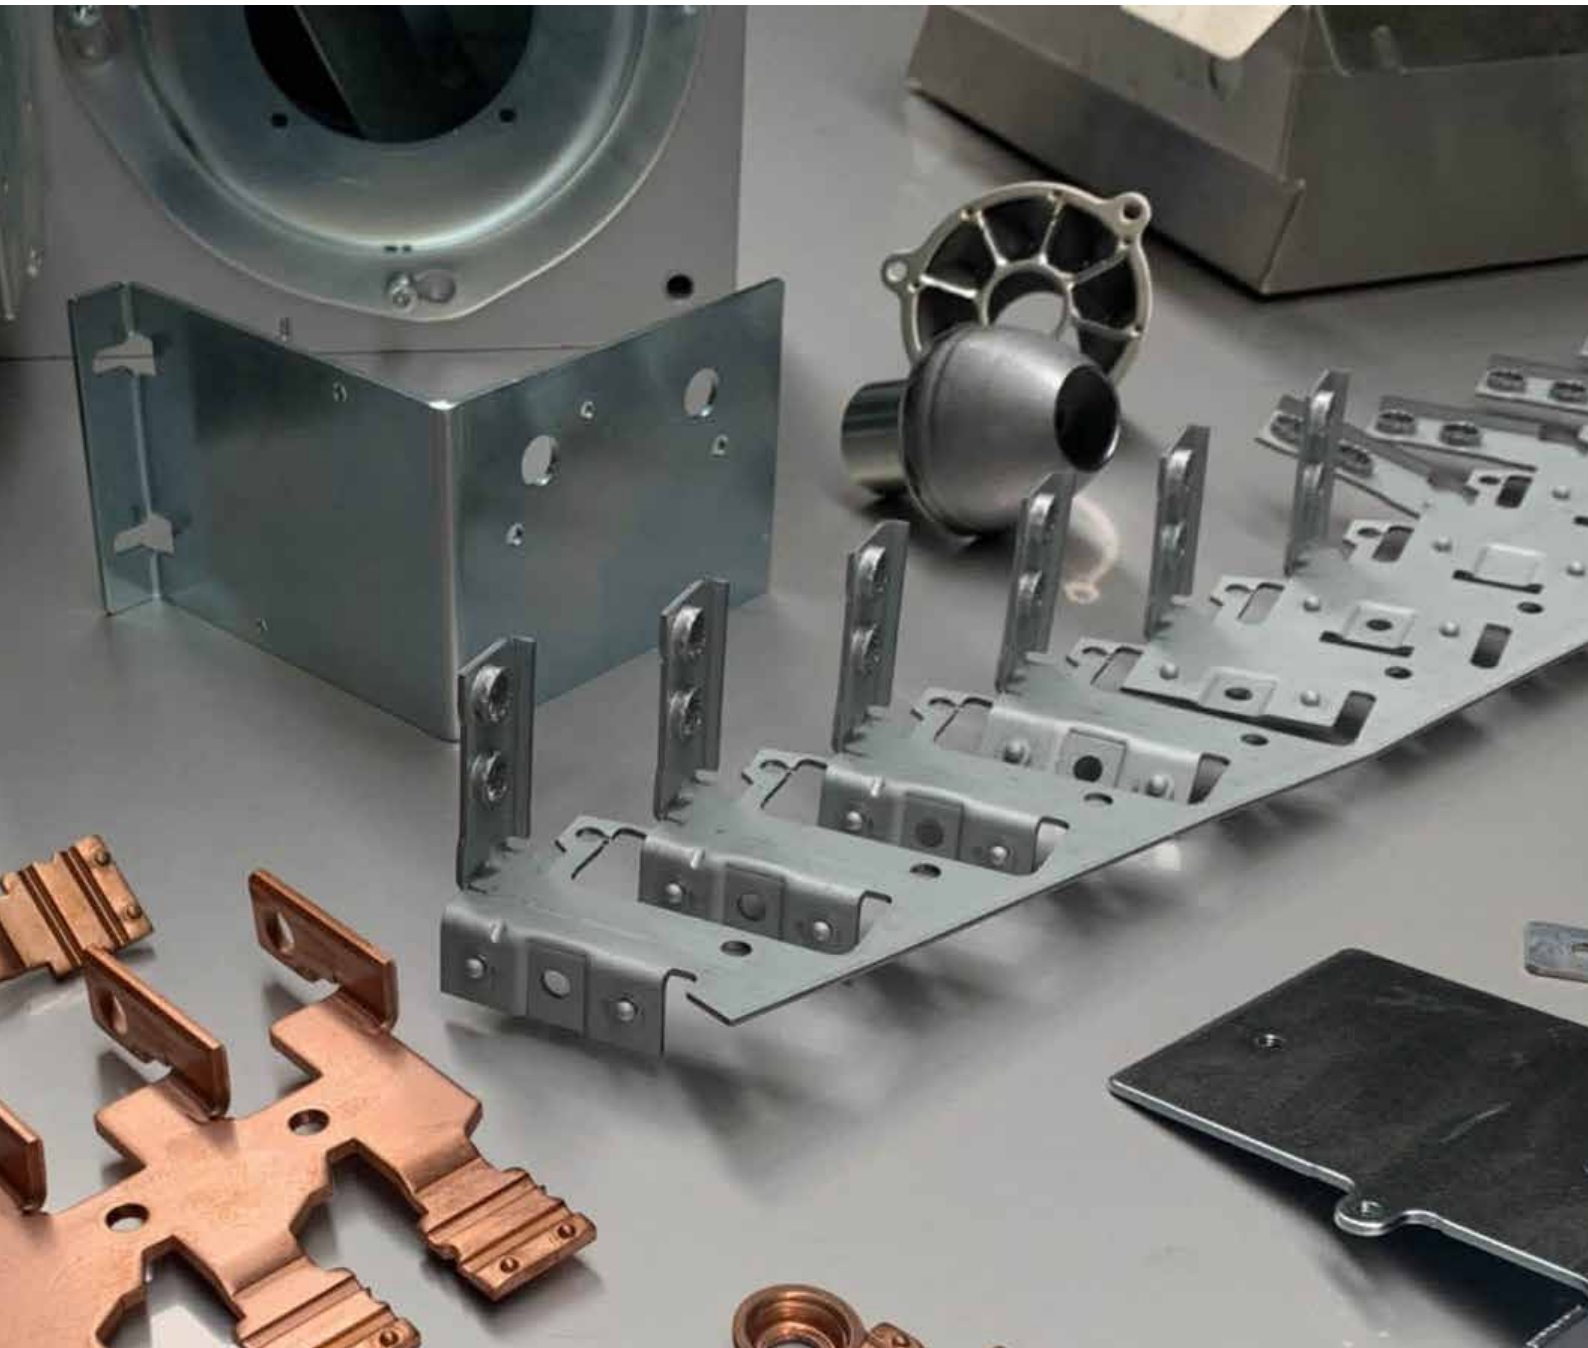

Sheet Metal Press Parts

Custom-manufactured components made to customer drawings, samples and specifications.

WHAT WE MANUFACTURE?
NAEPL manufactures sheet metal press parts, banding straps and banding buckles to customer drawings, samples and specifications. Press operations include blanking, piercing, bending and forming, with materials, thicknesses, dimensions and finishes selected according to the approved requirements. Projects can range from prototype samples to repeat production batches. Drawings or samples are reviewed before production, and inspections are carried out in line with agreed requirements.

01
Processing
Blanking, piercing, bending and forming of sheet and strip metal.

02
Material
Mild Steel, Stainless Steel, Brass, Copper, Aluminium and other materials as specified.

03
Finishing
Deburring, plating, passivation, polishing, powder coating and painting, as required.

04
Input Format
2D CAD files (DWG, DXF, PDF), 3D files (STEP/STP) or physical samples.

QUALITY & INSPECTION
- Drawings and specifications are reviewed before tooling and production to clarify dimensions, materials, tolerances and finish requirements.
- Critical dimensions are checked during production and before dispatch, according to the agreed inspection requirements.
- Burrs and sharp edges are controlled in line with component and handling requirements. drawing or sample.

FROM PROTOTYPE TO PRODUCTION
NAEPL supports projects from initial samples and prototypes through repeat production. Components are manufactured to the approved drawing or sample, with order quantities and delivery schedules agreed for each project.

CUSTOM PRESS PARTS
Custom blanked, pierced, bent and formed components manufactured to customer drawings or samples.

Typical applications: Brackets, clips, plates, washers, covers, lugs, connectors and enclosure components for electrical, industrial and general engineering applications.

Materials & thickness: Mild steel, stainless steel including SS304 and SS316, brass, copper and aluminium. Thickness is based on the approved drawing or specification.

Finishing options: Deburring, plating, passivation, polishing, powder coating and painting, as required.

Stainless Steel Banding Products

Corrosion-Resistant Bands
Stainless steel banding intended for corrosive industrial, marine, salt-water and chemical environments. Material grade and dimensions should be selected according to application requirements.

High-Tensile Bands
SS201 stainless steel banding for applications requiring high tensile strength and reliable fastening. Available specifications depend on the selected product.

Economical Bands
SS430 stainless steel banding for general-purpose fastening, securing and bundling where economical material selection is required. Suitability depends on the operating environment.

Utility Bands
Versatile stainless steel banding for general industrial and utility fastening, securing and mounting applications. Available grades are listed in the product range.

Heavy-Duty Bands
Stainless steel banding for demanding industrial fastening and securing applications. Select the appropriate grade and dimensions according to service conditions.

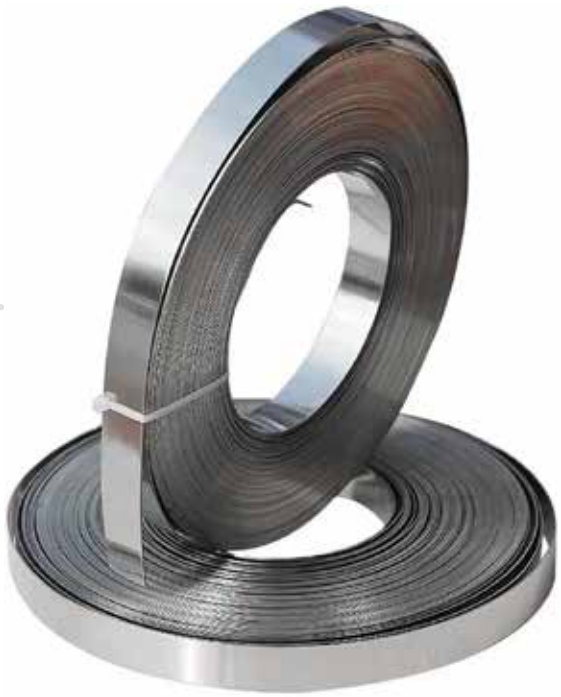

COATED & UNCOATED PERFORATED BANDING

PRODUCT	DESCRIPTION
PVC-Coated Bands	Stainless steel banding with a PVC thermoplastic coating for industrial fastening, bundling and mounting. Compatible buckles and installation tools are available.
PPA 571-Coated Bands	Stainless steel banding with a PPA 571 polymer coating for outdoor installations and demanding industrial environments.
All-Purpose PPA 571-Coated Bands	Perforated, polymer-coated banding for general-purpose fastening and mounting. Available material options and roll lengths vary by product.
All-Purpose Uncoated Bands	Perforated banding without a polymer coating for general industrial fastening and mounting. Available in different material grades and roll lengths.
Aluminium Perforated Strips	Lightweight aluminium strips with evenly spaced holes for light-duty fastening and mounting using screws, bolts or cable ties.

Pre-Cut Straps & Buckles

Fastening components for compatible banding assemblies. Material, finish and configuration vary by product.

PRODUCT	DESCRIPTION
Pre-Cut Jaw Straps	Ready-to-use straps assembled with jaw-type buckles for convenient fastening and installation.
Pre-Cut Wing Straps	Pre-cut straps assembled with wing-type buckles for efficient fastening and mounting.
Jaw Buckles	Fastening components for compatible banding straps, available in coated and uncoated variants.
Wing Buckles	Wing-type buckles for compatible banding straps, available in coated and un-coated variants.
Screw Buckles	Screw-type buckles designed for compatible banding straps and industrial fastening applications.

SIGN MOUNTING BRACKETS

Stainless steel brackets designed for mounting traffic signs, junction boxes, electrical enclosures and other equipment in industrial, infrastructure and outdoor applications.

Key Features

- Material: SS201 stainless steel.
- Designs: Mini single-bolt brackets with straight or flared legs.
- Slot size: 1/2 inch (12.7 mm).
- Hardware: Selected variants supplied with a stainless steel bolt and washer.

Available Configurations

Straight-Leg Brackets: Designed for standard mounting arrangements where a straight bracket profile is suitable.
Flared-Leg Brackets: Feature outward-flared legs to accommodate alternative mounting arrangements.
Hardware Options: Depending on the selected variant, brackets may be supplied with a stainless steel bolt and washer.

N.GANDHI
GROUP

N GANDHI ADVANCE ENGINEERING PRIVATE LIMITED.
An ISO 9001:2015 Certified Company

104,1st Floor, C Wing ,Marathon Futurex,N M Joshi Marg,
Lower Parel (E), Mumbai - 400013, Maharashtra, India.
Telephone: +91 22 6838 0200 (100 Lines) | Mobile: +91 9136132011
Email: naepl@ngandhi.com website: www.naepl.in, www.ngandhi.com