Exp no: 10

Date: 29/8/26

INTERNETWORKING WITH ROUTING IN CISCO PACKET TRACER SIMULATOR

A) Design and configure a simple Internetwork Router in cisco packet Tracer:

AIM:


To design and configure two different network using a router and switches, assign static IP addres and verify packet communication between the networks.

STEPS:

1. Open cisco packet tracer
2. Add 1 router, 2 switches and 3-4 pcs
3. Connect PCs to switches using Copper straight through Cables
4. Connect both switches to the router
5. Assign Static IP addresses to all PCs
6. Configure the router interfaces with suitable IP address
7. Enable the router interface using no shutdown
8. Set the router interface IP as the default gateway for each network
9. Use the Ping command to check connectivity
10. Select simulation mode and observe the packet transmission path through the router

RESULT:


The two network were successfully connected using a router, and communication between different networks was verified successfully using the ping command

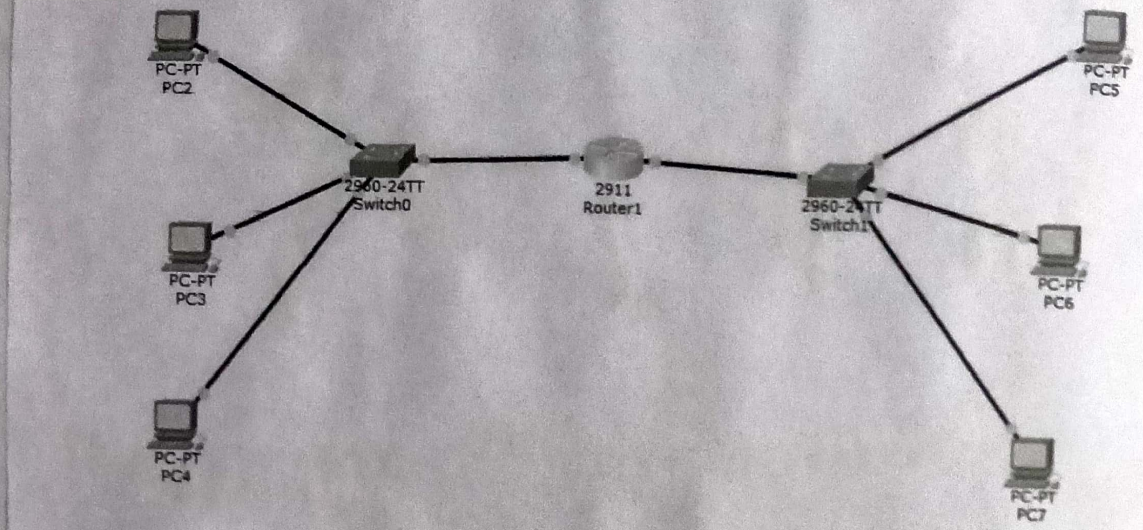



```
Router#enable
Router#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0     192.168.10.1    YES manual up                    up
GigabitEthernet0/1     192.168.20.1    YES manual up                    up
GigabitEthernet0/2     unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down
Router#
```

Copy Paste

Scanned with OKEN Scanner

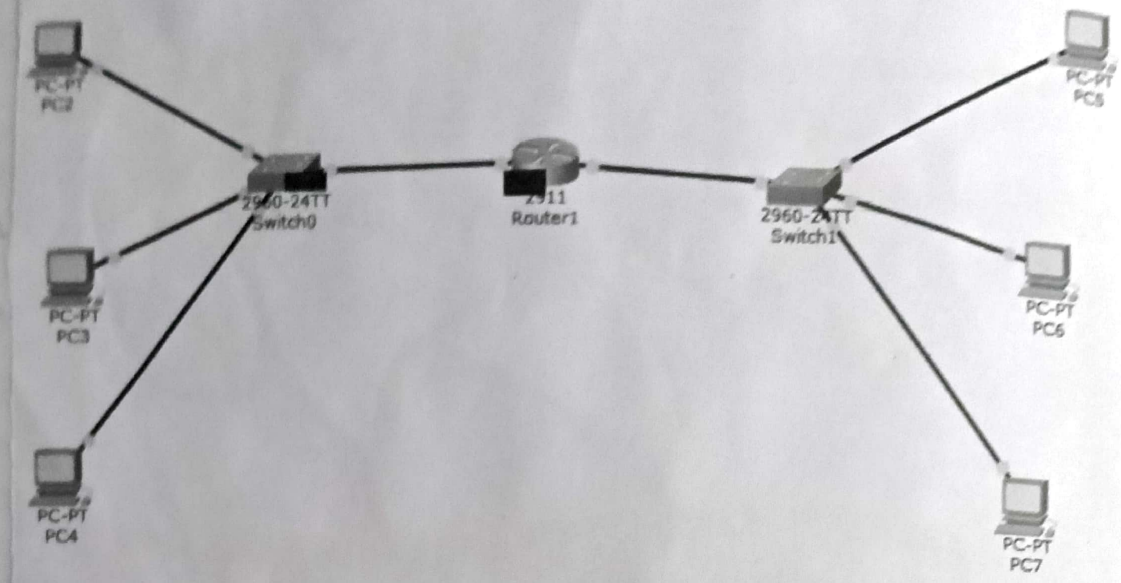

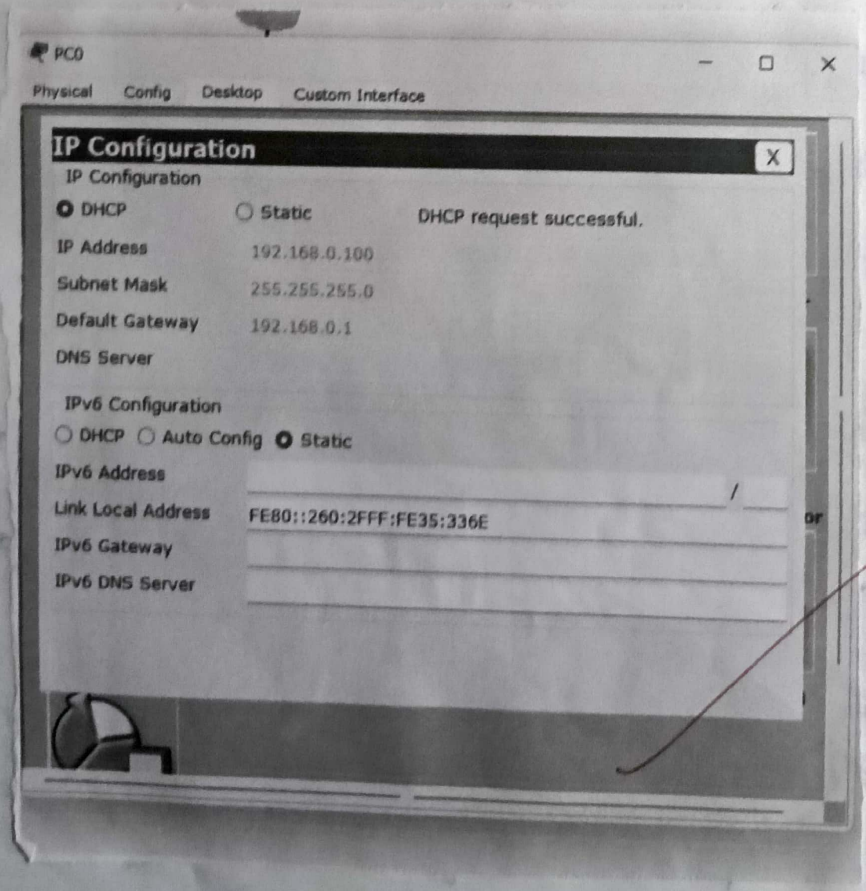

Scanned with OKEN Scanner