
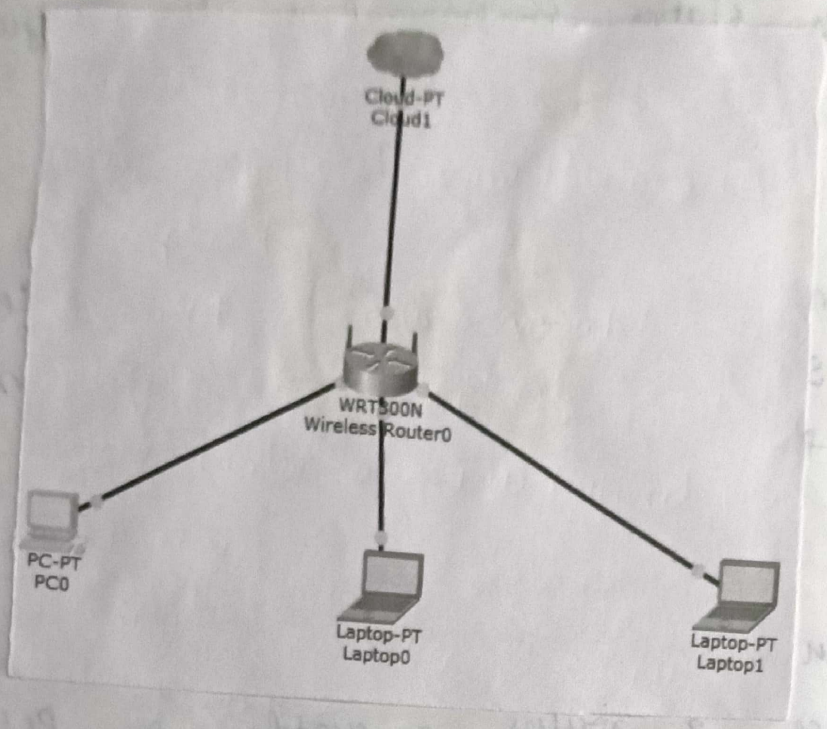


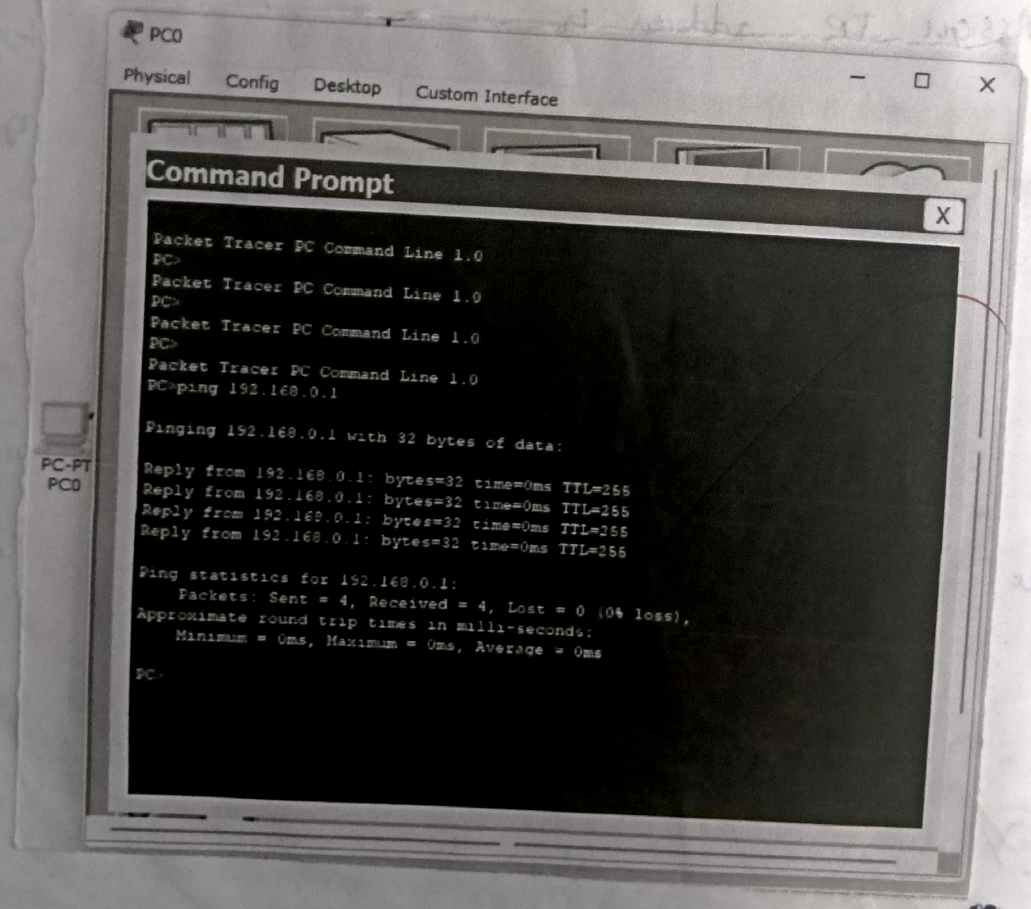

Scanned with OKEN Scanner

11) b

SIMULATE RIP USING CISCO PACKET TRACER

AIM:

To configure and simulate the routing Information protocol between routers using cisco packet Tracer and verify network connectivity

STEPS:

1. Open CISCO packet tracer
2. Place 2 or 3 routers, switches & PCs
3. Connect the devices using Ethernet cables
4. Assign IP addresses to PC's and router interfaces
5. Enable all router interfaces using no shutdown
6. Configure RIP on the Routers
7. Configure the appropriate network address on each router according to topology
8. Check the routing table using show ip route
9. Use the Ping command to test communication between PC's in different network
10. Use simulation Mode to observe how RIP learns & select routers

RESULT:

RIP was succesfully configured between the routers using cisco packet Trace. The routes learned the required network routers dynamically & communication was succesfully verified

Exp no: 12

Date: 17/9/24

END - END COMMUNICATION AT TRANSPORT LAYE

A) Implement echo client server using TCP / UDP sockets

AIM:

To implement an echo client - server application using TCP sockets and verify communication between client and server

PROCEDURE:

- Create a TCP echo server using server socket
- Assign a port number to the server
- Compile and execute TCP server program
- Create a TCP echo client using socket
- Connect the client to the server using the server address
- Enter a message through the client
- Enter bye to terminal communication

Thus the TCP echo client server application was successfully implemented and the client successfully received the echoed message from server