10) b | INTERNETWORK USING WIRELESS ROUTER, DHCP Server AND INTERNET

AIM:

To design and configure a wireless internetwork using a wireless router, DHCP server and internet cloud and verify automatic IP address allocation & connectivity

STEPS:

1. Open CISCO Packet tracer
2. Add a wireless Router, Laptops / Wireless devices and an internet cloud
3. Connect the wireless Router to the Internet cloud using an Ethernet Cable.
4. Configure the SSID of the wireless router
5. Enable the DHCP server on wireless router
6. Configure the DHCP IP address range
7. Connect Laptops to the wireless network
8. Set the Laptops to obtain IP address automatically using DHCP.
9. Check whether the devices receive IP address automatically
10. Use the ping command to test connectivity
11. Use simulation Mode to observe packet transmission.

RESULT:

The wireless internetwork was successfully configured using a wireless router, DHCP server and Internet cloud. IP address were automatically assigned to wireless devices and connectivity was sucessfully verified

10) C

INTERNETWORK USING SWITCH, ROUTER AND ETHERNET CABLES

AIM:

To design and configure an internetworking using switches, a router and Ethernet cables and to establish communication between different networks


STEPS:

1. Open cisco packet tracer
2. Add 1 router, 2 switches and 3-4 pcs.
3. Connect the pcs to the switches using ethernet cable
4. Connect the switches to the router using ethernet cables
5. Assign suitable static IP address to the PC's
6. Configure the IP address of the router Interfaces
7. Enable the router interface using no shutdown
8. Configure the appropriate default gateway on each PC
9. Use the ping command to test communication between PC
10. Select simulation mode and Observe the packet flow through the switches & router

RESULT:

The internetwork was successfully designed and configured using switches and router and ethernet cables communication between the different networks bias establish and verified successfully using the command.

Scanned with OKEN Scanner

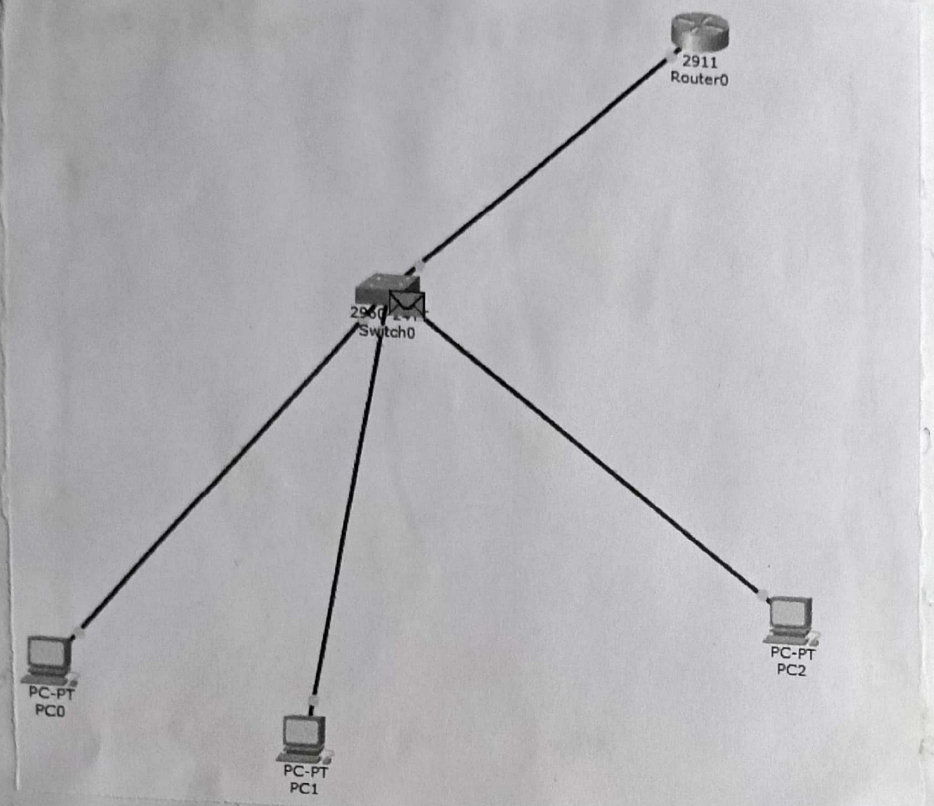


```
         --- System Configuration Dialog ---

Continue with configuration dialog? [yes/no]: no

Press RETURN to get started!


Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface gigabitethernet 0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed sta
to up
exit
```

Scanned with OKEN Scanner