Logical Operations

- Instructions for bitwise manipulation

Operation	C	Java	MIPS
Shift left	<<	<<	sll
Shift right	>>	>>>	srl
Bitwise AND	&	&	and, andi
Bitwise OR	|	|	or, ori
Bitwise NOT	~	~	nor

- Useful for extracting and inserting groups of bits in a word

Shift Operations

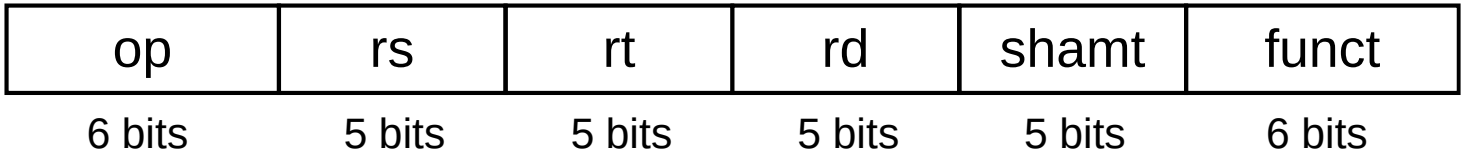

- shamt: how many positions to shift
- Shift left logical
  - Shift left and fill with 0 bits
  - `sll` by *i* bits multiplies by 2^i
- Shift right logical
  - Shift right and fill with 0 bits
  - `srl` by *i* bits divides by 2^i (unsigned only)

AND Operations

- Useful to mask bits in a word
  - Select some bits, clear others to 0

```
and $t0, $t1, $t2
```

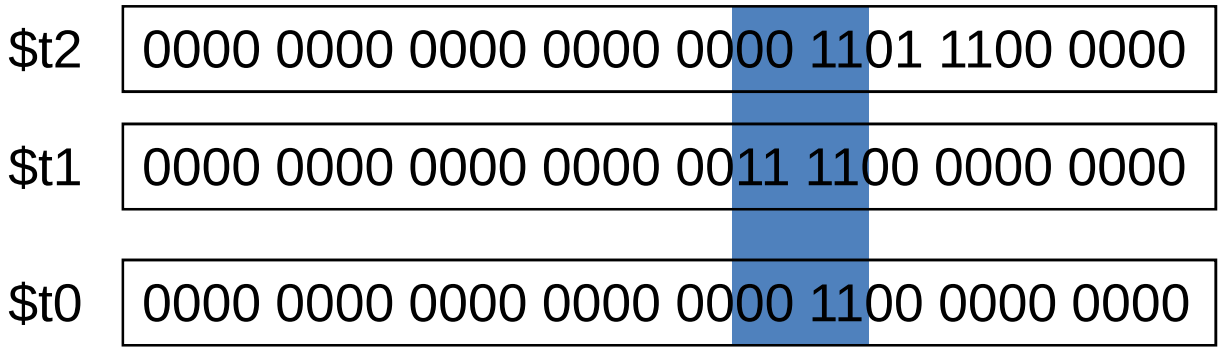

OR Operations

- Useful to include bits in a word
  - Set some bits to 1, leave others unchanged

```
or $t0, $t1, $t2
```

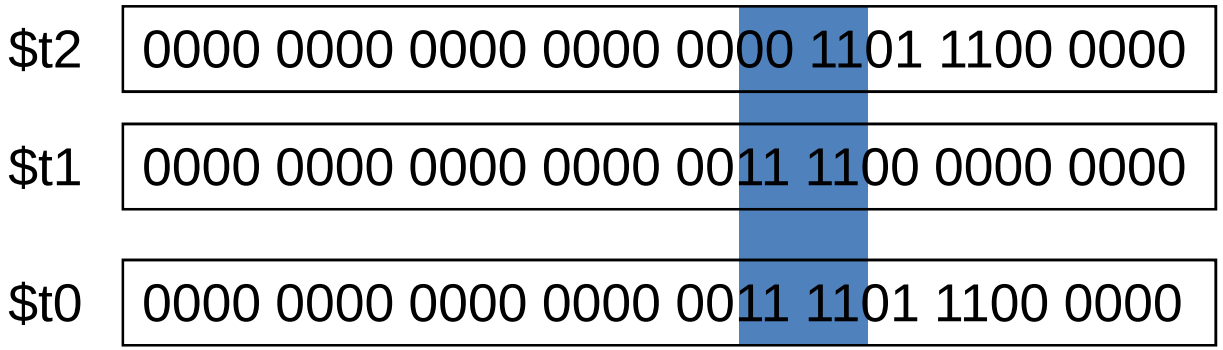

NOT Operations

- Useful to invert bits in a word
  - Change 0 to 1, and 1 to 0
- MIPS has NOR 3-operand instruction
  - a NOR b == NOT (a OR b)

```
nor $t0, $t1, $zero
```

Register 0: always read as zero

$t1	0000 0000 0000 0000 0011 1100 0000 0000
$t0	1111 1111 1111 1111 1100 0011 1111 1111

Conditional Operations

- Branch to a labeled instruction if a condition is true
  - Otherwise, continue sequentially
- `beq rs, rt, L1`
  - if (rs == rt) branch to instruction labeled L1;
- `bne rs, rt, L1`
  - if (rs != rt) branch to instruction labeled L1;
- `j L1`
  - unconditional jump to instruction labeled L1

Compiling If Statements

- C code:

```
if (i==j) f = g+h;
else f = g-h;
```

  – f, g, … in $s0, $s1, …

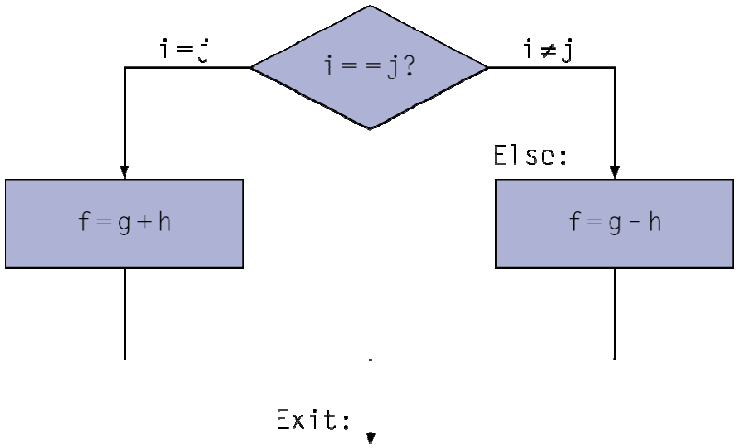

- Compiled MIPS code:

```
      bne $s3, $s4, Else
      add $s0, $s1, $s2
      j   Exit
Else: sub $s0, $s1, $s2
Exit: …
```

Assembler calculates addresses

Compiling Loop Statements

- C code:

```
while (save[i] == k) i += 1;
```

  - i in $s3, k in $s5, address of save in $s6
- Compiled MIPS code:

```
Loop: sll  $t1, $s3, 2
      add  $t1, $t1, $s6
      lw   $t0, 0($t1)
      bne  $t0, $s5, Exit
      addi $s3, $s3, 1
      j    Loop
Exit: …
```

More Conditional Operations

- Set result to 1 if a condition is true
  - Otherwise, set to 0
- `slt rd, rs, rt`
  - if (rs < rt) rd = 1; else rd = 0;
- `slti rt, rs, constant`
  - if (rs < constant) rt = 1; else rt = 0;
- Use in combination with `beq`, `bne`

```
slt $t0, $s1, $s2  # if ($s1 < $s2)
bne $t0, $zero, L  #   branch to L
```

Branch Instruction Design

- Why not `blt`, `bge`, etc?
- Hardware for <, ≥, … slower than =, ≠
  - Combining with branch involves more work per instruction, requiring a slower clock
  - All instructions penalized!
- `beq` and `bne` are the common case
- This is a good design compromise

Addressing Modes

Branch Addressing

- Branch instructions specify
  - Opcode, two registers, target address
- Most branch targets are near branch
  - Forward or backward

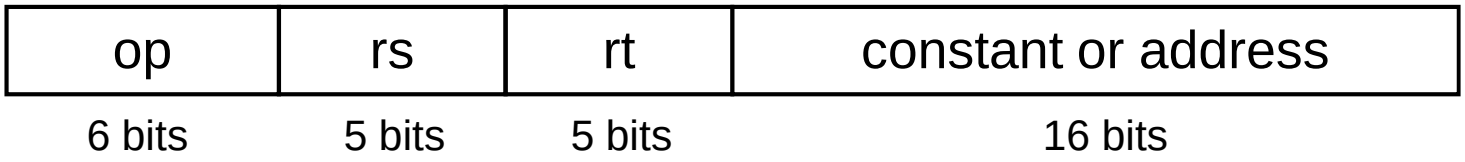

- PC-relative addressing
  - Target address = PC + offset × 4
  - PC already incremented by 4 by this time

Jump Addressing

- Jump (`j` and `jal`) targets could be anywhere in text segment
  - Encode full address in instruction

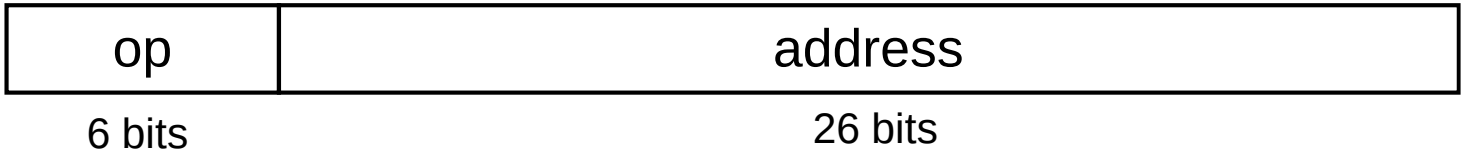

- (Pseudo)Direct jump addressing
  - Target address = $PC_{31...28}$: (address × 4)

Target Addressing Example

- Loop code from earlier example
  - Assume Loop at location 80000

```
Loop: sll  $t1, $s3, 2
      add  $t1, $t1, $s6
      lw   $t0, 0($t1)
      bne  $t0, $s5, Exit
      addi $s3, $s3, 1
      j    Loop
Exit: …
```

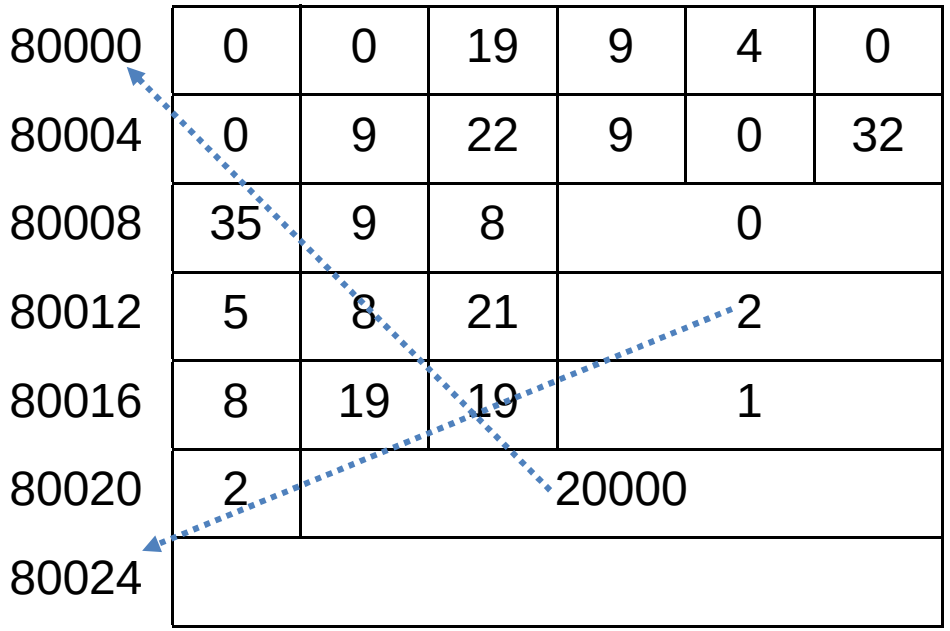

Branching Far Away

- If branch target is too far to encode with 16-bit offset, assembler rewrites the code
- Example

```
        beq $s0,$s1, L1
              ↓
        bne $s0,$s1, L2
        j L1
  L2: …
```

Addressing Mode Summary