Ex. No: Simulation of RIP using
Date: CISCO Packet Tracer.

Aim:
To simulate Routing information Protocol (RIP) using CISCO Packet Tracer and observe dynamic routing between different networks.

IP configuration:

Device	Interface	IP Address
PC 0	Fast Ethernet	10.0.0.218
Router 0	Fa 0 11	10.0.0.118
Router 0	S0 10 11	192.168.1.254.30
Router 1	S0 10 10	192.168.1.250/30
Router 1	S0 10 10 1	192.168.1.246/30
Router 2	S0 10 10	192.168.1.245/30
Router 2	S0 10 11	192.168.1.253/30
PC 1	Faith Ethernet	20.0.0.2/8


Procedure:

1. Create the topology with 3 routers and 2 PCs.
2. Connect the routers using serial cables and connect PC's to the respective routers
3. Assign IP addresses to all PCs and router interface.
4. Enable the router interfaces.
5. Configure the remaining interfaces according to the given IP table.
6. Enable RIP on router 0 and configure RIP on Router 1 and 2.

7. From PC 0, use ping 20.0.0.2 verify connectivity.

8. Use tracert to observe the route taken by packets.

9. Disconnect the direct Router 0 - Router 2 link and observe that RIP reroutes the traffic through Router

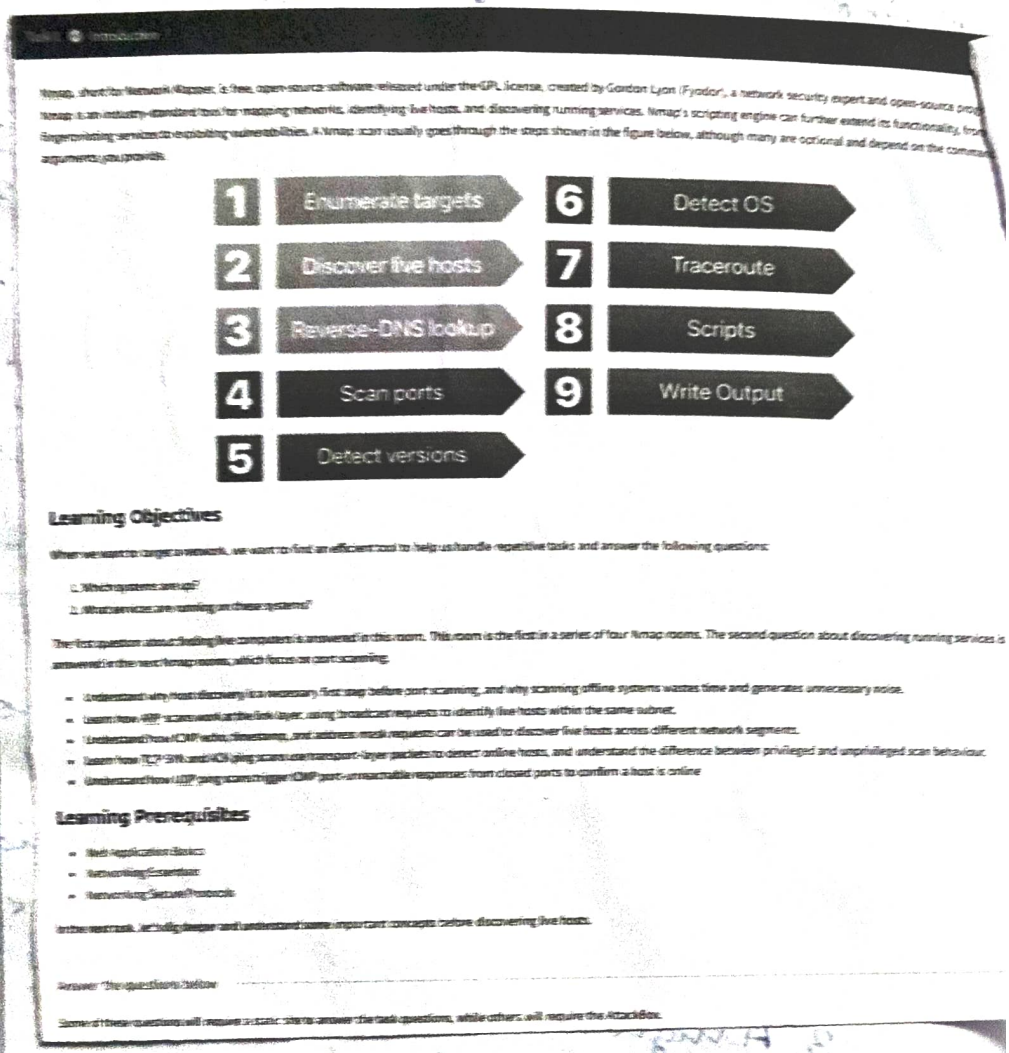

Result:

Thus, RIP was successfully simulated in CISCO Packet Tracer, and dynamic route selection and routing were obs