

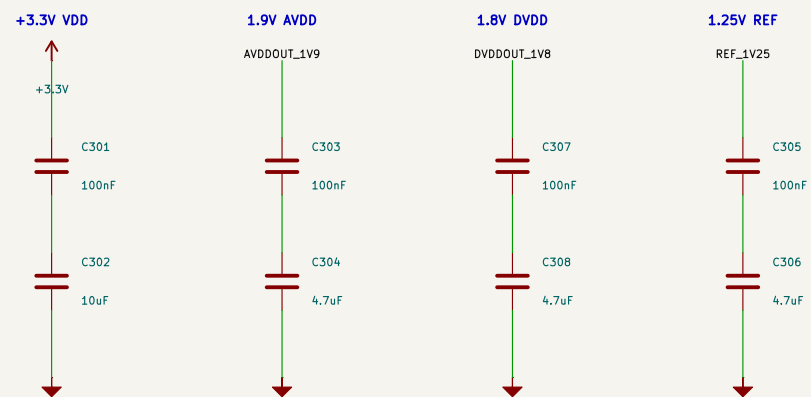
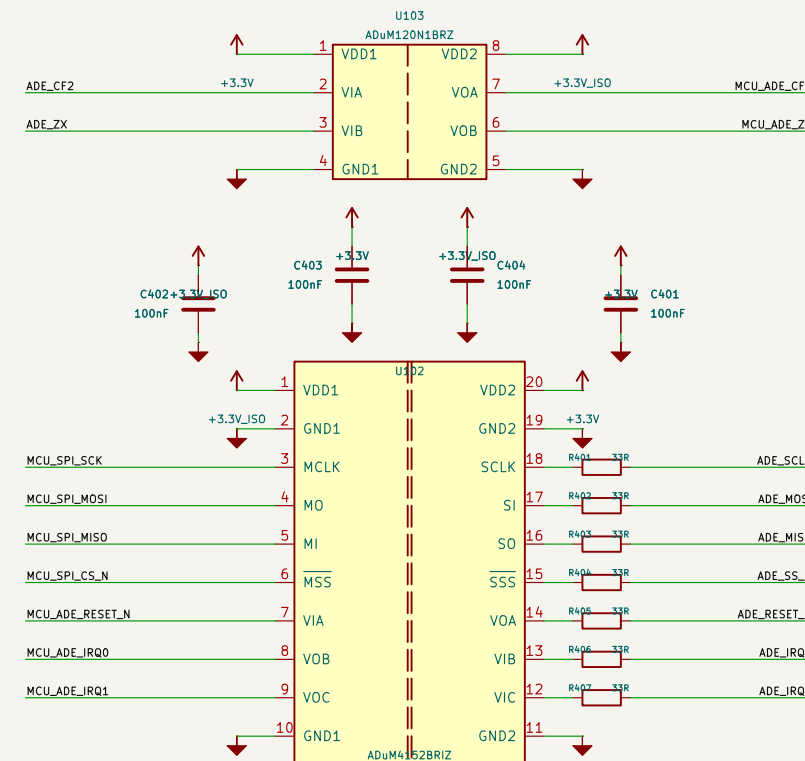
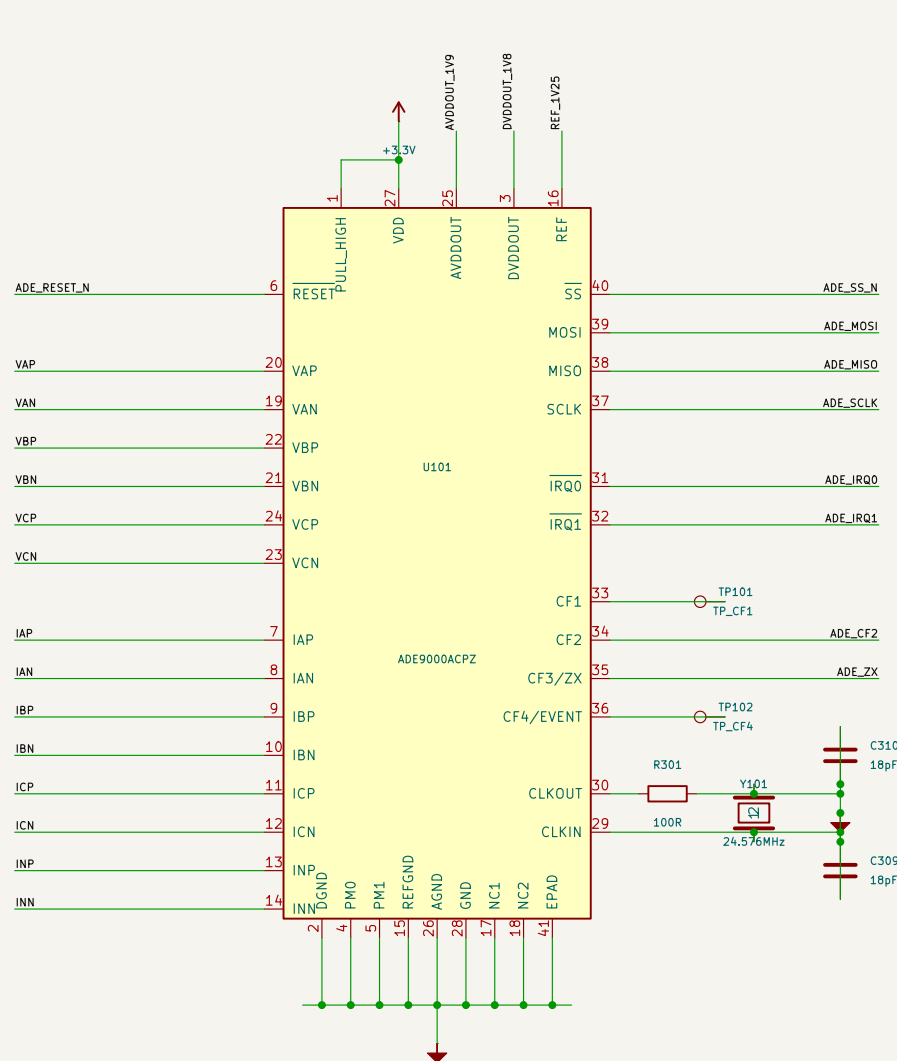
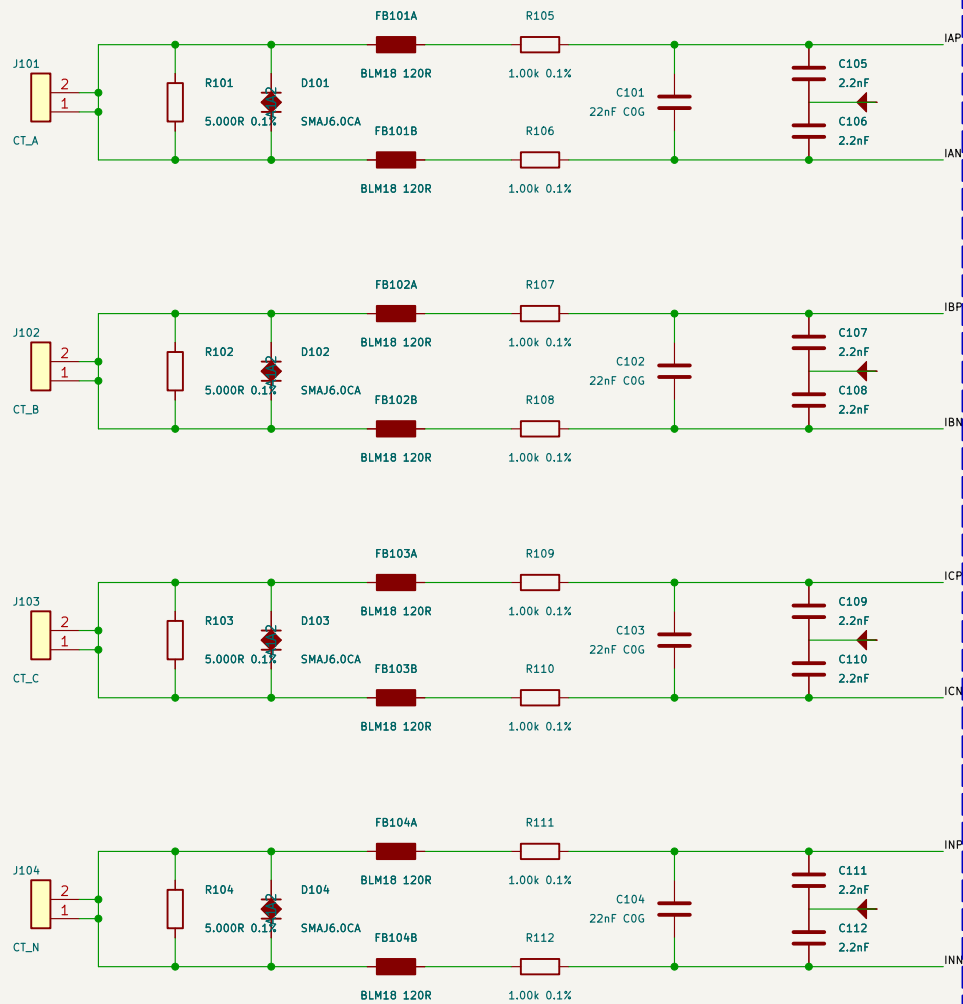
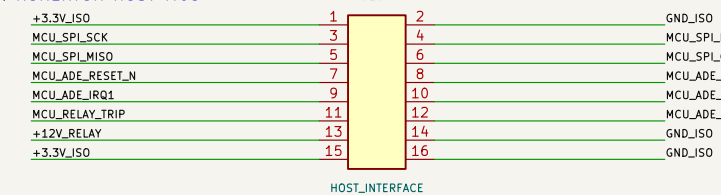


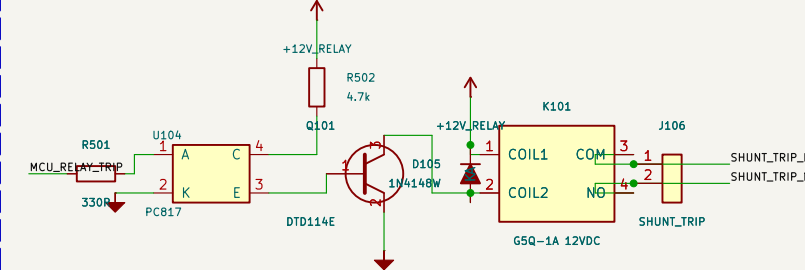

The diagrams show four different voltage levels for the PWR_FLAG pin:

- Diagram 1:** PWR_FLAG is connected to +3.3V.
- Diagram 2:** PWR_FLAG is connected to 0V.
- Diagram 3:** PWR_FLAG is connected to +3.3V_ISO.
- Diagram 4:** PWR_FLAG is connected to +12V_RELAY.

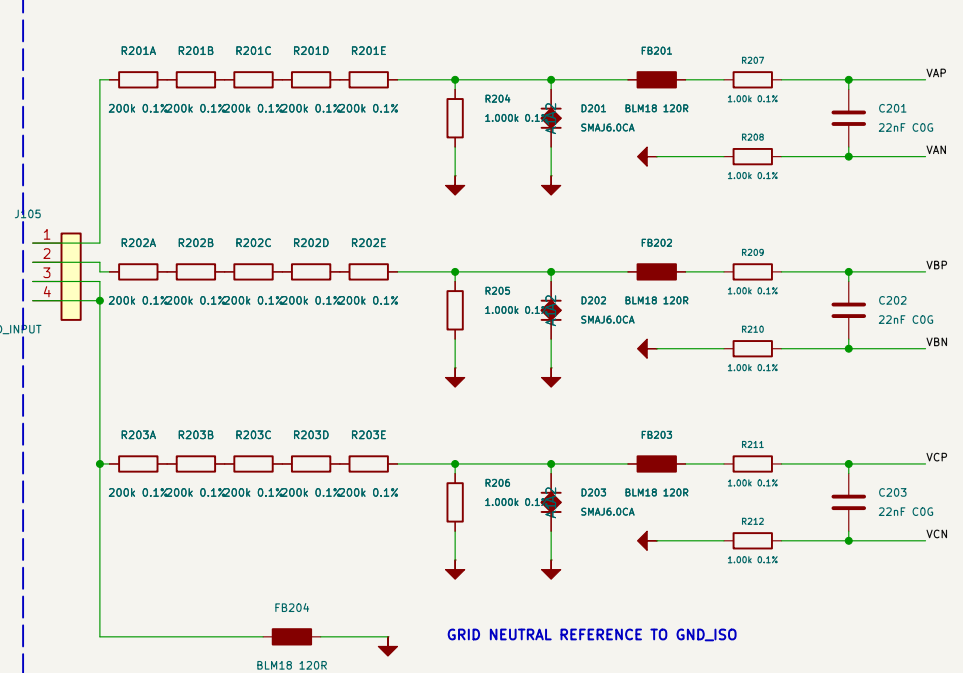

Isolasi Galvanis 5.0 kVrms via ADuM4152 & ADuM120N; Proteksi Trip via Omron G5Q-1A Smart Meter Tiga Fasa Berbasis ADE9000 & STM32U585 (Dokumen B400)		
Institut Teknologi Bandung & PT Len Industri (Persero)		
Sheet: /		
File: subsistem1_metrologi.kicad_sch		
Title: SUBSISTEM 1: PENGINDERAAN ANALOG DAN METROLOGI ENERGI		
Size: A3	Date: 2026-10-07	Rev: 1.5
KiCad E.D.A. 10.0.6		Id: 1/1