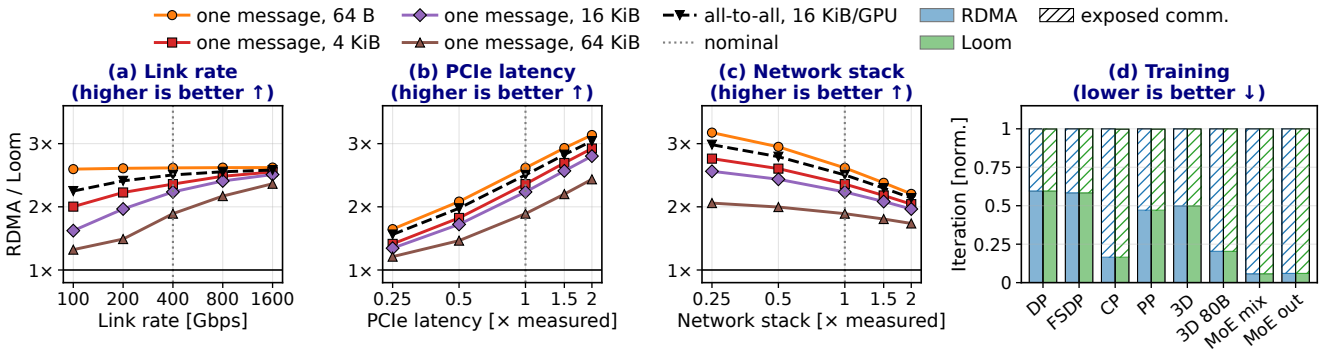
one message, 64 B
one message, 4 KiB
one message, 16 KiB
one message, 64 KiB
all-to-all, 16 KiB/GPU
nominal
RDMA
Loom
exposed comm.
(a) Link rate
(higher is better ↑)
RDMA / Loom
3×
2×
1×
100 200 400 800 1600
Link rate [Gbps]
(b) PCIe latency
(higher is better ↑)
0.25 0.5 1 1.5 2
PCIe latency [× measured]
(c) Network stack
(higher is better ↑)
0.25 0.5 1 1.5 2
Network stack [× measured]
(d) Training
(lower is better ↓)
Iteration [norm.]
1
0.75
0.5
0.25
0
DP
FSDP
CP
PP
3D
3D 80B
MoE mix
MoE out