


Design and implementation of VLAN-Based Network segmentation

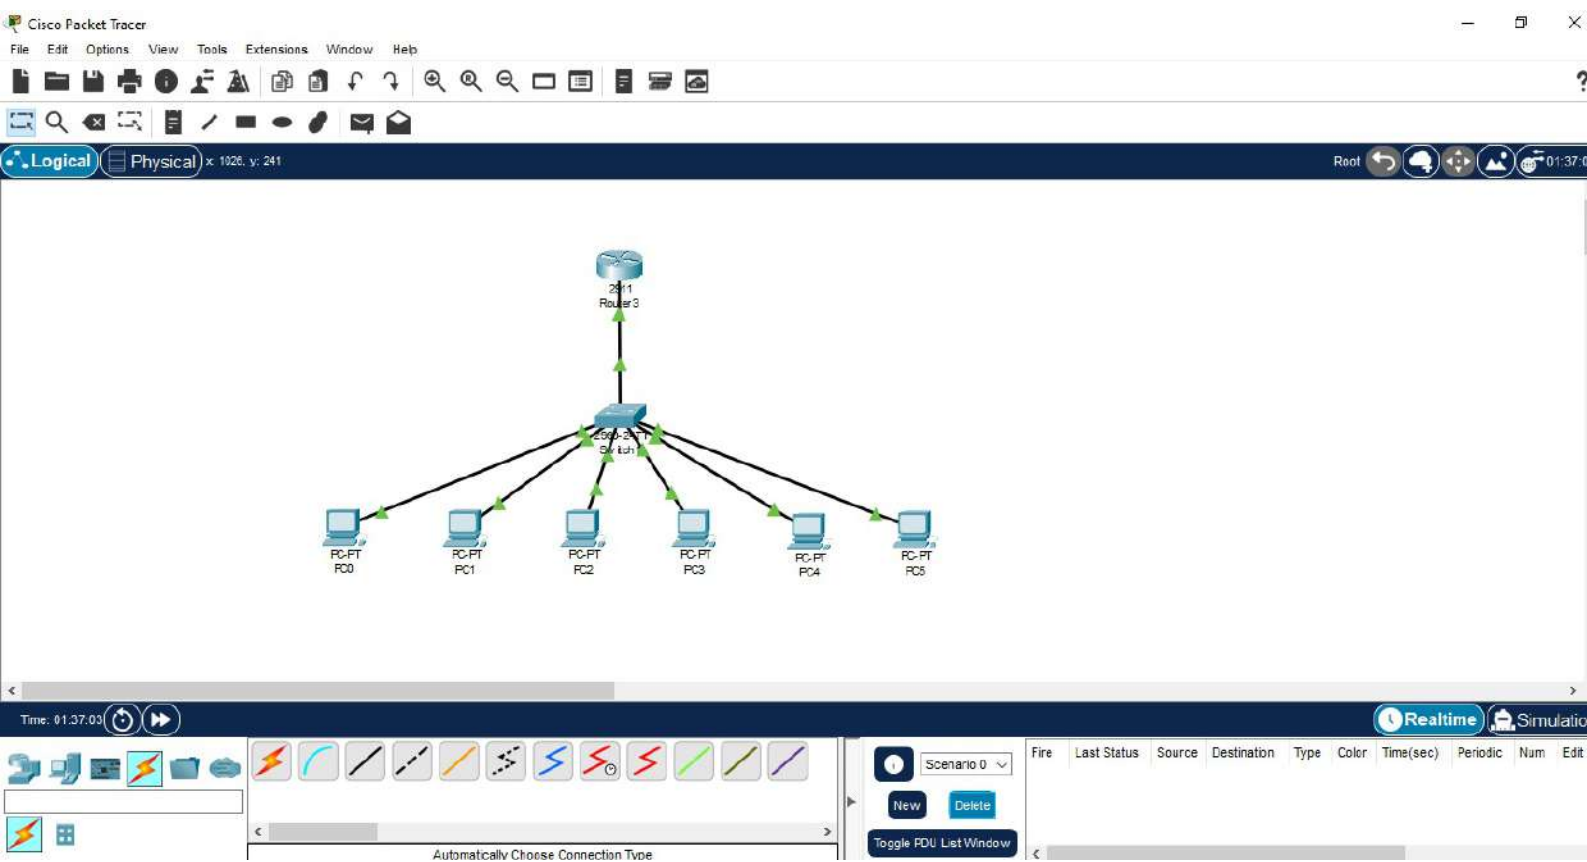

Router3

PhysicalConfigCLIAttributes

IOS Command Line Interface

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#interface gig0/0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#
Router(config-if)#interface gig0/0.10
Router(config-subif)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0.10, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.10, changed state to up

Router(config-subif)#encapsulation dot1Q 10
Router(config-subif)#ip address 192.168.1.1 255.255.255.0
Router(config-subif)#no shutdown
Router(config-subif)#
Router(config-subif)#interface gig0/0.20
Router(config-subif)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0.20, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.20, changed state to up

Router(config-subif)#encapsulation dot1Q 20
Router(config-subif)#ip address 192.168.2.2 255.255.255.0
Router(config-subif)#no shutdown
Router(config-subif)#
Router(config-subif)#interface gig0/0.30
Router(config-subif)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0.30, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.30, changed state to up
```

CopyPaste

☐ Top

Router3

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINK-5-CHANGED: Interface GigabitEthernet0/0.30, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.30, changed state to up

Router(config-subif)#encapsulation dot1Q 30
Router(config-subif)#ip address 192.168.3.3 255.255.255.0
Router(config-subif)#no shutdown
Router(config-subif)#
Router(config-subif)#
Router(config-subif)#ip dhcp pool admin
Router(dhcp-config)#network 192.168.1.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.1.1
Router(dhcp-config)#domain-name admin.com
Router(dhcp-config)#do wr
Router(dhcp-config)#ex
Router(config)#ip dhcp pool master
Router(dhcp-config)#network 192.168.2.1 255.255.255.0
Router(dhcp-config)#default-router 192.168.2.2
Router(dhcp-config)#domain-name master.com
Router(dhcp-config)#do wr
Router(dhcp-config)#ex
Router(config)#ip dhcp pool virtual
Router(dhcp-config)#network 192.168.3.2 255.255.255.0
Router(dhcp-config)#default-router 192.168.3.3
Router(dhcp-config)#domain-name virtual.com
Router(dhcp-config)#do wr
Router(dhcp-config)#ex
Router(config)#
Router(config)#

Router con0 is now available
```

Copy Paste

Switch1

PhysicalConfigCLIAttributes

IOS Command Line Interface

Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name 10
Switch(config-vlan)#vlan 20
Switch(config-vlan)#name 20
Switch(config-vlan)#vlan 30
Switch(config-vlan)#name 30
Switch(config-vlan)#do sh vlan

VLAN Name	Status	Ports
1 default	active	Fa0/7, Fa0/8, Fa0/9, Fa0/10 Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15, Fa0/16, Fa0/17, Fa0/18 Fa0/19, Fa0/20, Fa0/21, Fa0/22 Fa0/23, Fa0/24, Gig0/1, Gig0/2
10 10	active	Fa0/1, Fa0/2
20 20	active	Fa0/3, Fa0/4
30 30	active	Fa0/5, Fa0/6
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
10	enet	100010	1500	-	-	-	-	-	0	0
20	enet	100020	1500	-	-	-	-	-	0	0
30	enet	100030	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	-	0	0
1004	fdnet	101004	1500	-	-	-	ieee	-	0	0
1005	trnet	101005	1500	-	-	-	ibm	-	0	0

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
10	enet	100010	1500	-	-	-	-	-	0	0
20	enet	100020	1500	-	-	-	-	-	0	0
30	enet	100030	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	-	0	0
1004	fdnet	101004	1500	-	-	-	ieee	-	0	0
1005	trnet	101005	1500	-	-	-	ibm	-	0	0

CopyPaste

☐ Top

Switch1

PhysicalConfigCLIAttributes

IOS Command Line Interface

Remote SPAN VLANs

Primary	Secondary	Type	Ports
---------	-----------	------	-------

Switch(config-vlan)#
Switch(config-vlan)#exit
Switch(config)#interface range fa0/1-2
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 10
Switch(config-if-range)#exit
Switch(config)#interface range fa0/3-4
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 20
Switch(config-if-range)#exit
Switch(config)#interface range fa0/5-6
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 30
Switch(config-if-range)#exit
Switch(config)#do sh run
Building configuration...

Current configuration : 1386 bytes
!
version 15.0
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Switch
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id

CopyPaste

☐ Top

Switch1

Physical Config CLI Attributes

IOS Command Line Interface

```
!
interface GigabitEthernet0/1
!
interface GigabitEthernet0/2
!
interface Vlan1
no ip address
shutdown
!
!
!
!
line con 0
!
line vty 0 4
login
line vty 5 15
login
!
!
!
end

Switch(config)#
Switch(config)#
Switch(config)#
Switch(config)#
Switch(config)#
Switch(config)#interface fa0/7
Switch(config-if)#switchport mode trunk

Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to up
```

Copy Paste

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.3.1

Pinging 192.168.3.1 with 32 bytes of data:

Reply from 192.168.3.1: bytes=32 time<1ms TTL=127
Reply from 192.168.3.1: bytes=32 time=11ms TTL=127
Reply from 192.168.3.1: bytes=32 time<1ms TTL=127
Reply from 192.168.3.1: bytes=32 time=10ms TTL=127

Ping statistics for 192.168.3.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 11ms, Average = 5ms

C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=3ms TTL=120
Reply from 192.168.1.2: bytes=32 time=16ms TTL=128
Reply from 192.168.1.2: bytes=32 time=5ms TTL=128
Reply from 192.168.1.2: bytes=32 time=5ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 3ms, Maximum = 16ms, Average = 7ms

C:\>
```


Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=127
Reply from 192.168.1.3: bytes=32 time<11ms TTL=127
Reply from 192.168.1.3: bytes=32 time<11ms TTL=127
Reply from 192.168.1.3: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 11ms, Average = 5ms

C:\>ping 192.168.2.1

Pinging 192.168.2.1 with 32 bytes of data:

Reply from 192.168.2.1: bytes=32 time<1ms TTL=127
Reply from 192.168.2.1: bytes=32 time<1ms TTL=127
Reply from 192.168.2.1: bytes=32 time=3ms TTL=127
Reply from 192.168.2.1: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.2.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 3ms, Average = 0ms

C:\>
```