


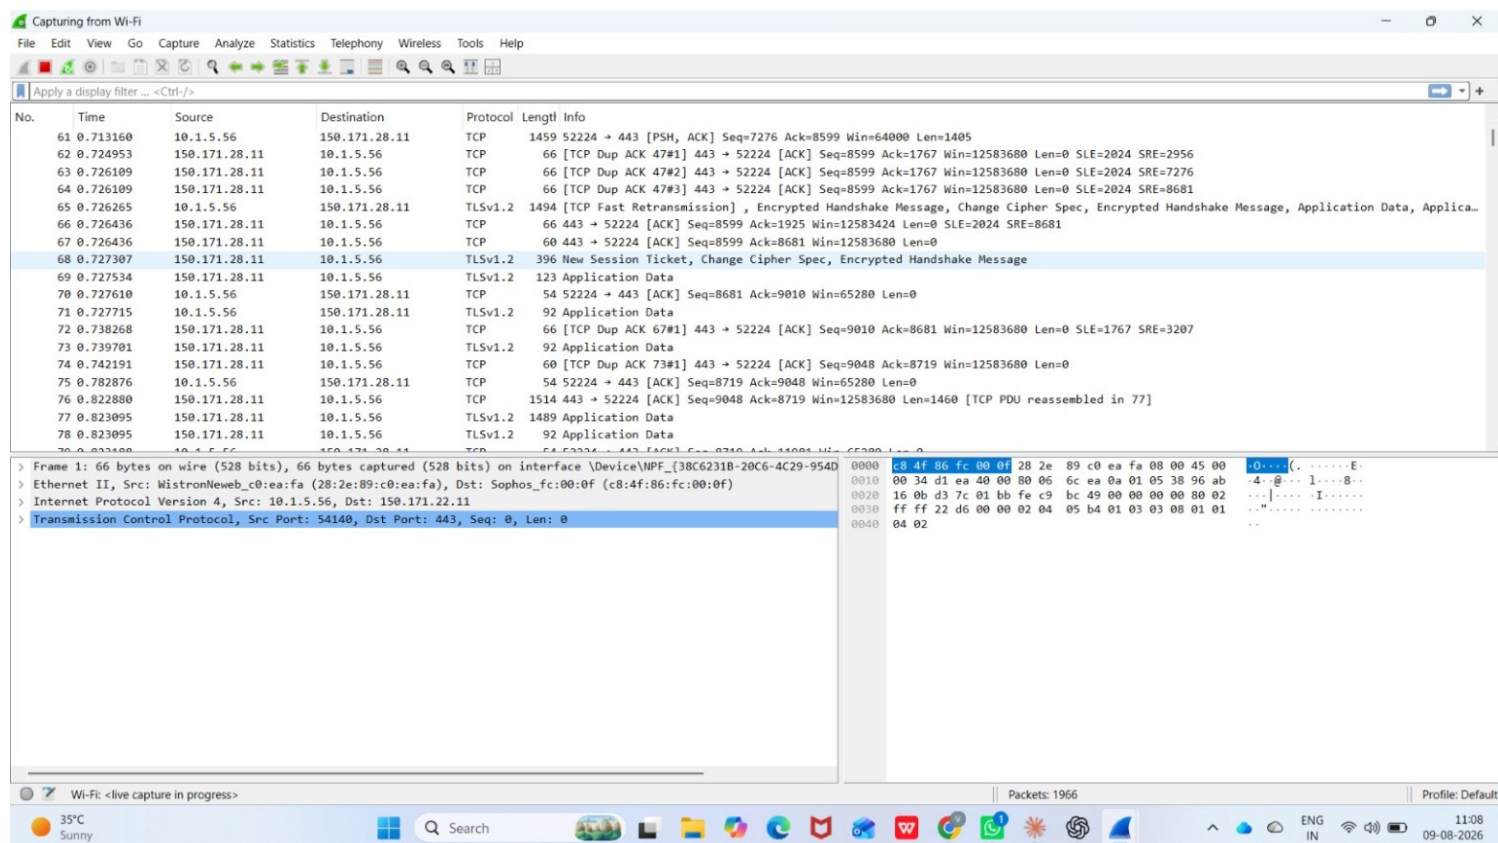

Wireshark HTTP Test Login

Username:

student123

Password:

Login

*Adapter for loopback traffic capture

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	192.168.56.1	224.0.0.251	MDNS	72	Standard query 0x0000 PTR _googlecast._tcp.local, "QM" question
2	8.694678	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=1 Ack=1 Win=255 Len=1
3	8.694762	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=2 Win=420 Len=0
4	8.694869	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=2 Ack=1 Win=255 Len=1
5	8.694925	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=3 Win=420 Len=0
6	8.694984	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=3 Ack=1 Win=255 Len=1
7	8.695024	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=4 Win=420 Len=0
8	8.695617	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=4 Ack=1 Win=255 Len=1
9	8.695673	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=5 Win=420 Len=0
10	8.695809	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=5 Ack=1 Win=255 Len=1
11	8.695857	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=6 Win=420 Len=0
12	8.695986	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=6 Ack=1 Win=255 Len=1
13	8.696031	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=7 Win=420 Len=0
14	8.696347	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=7 Ack=1 Win=255 Len=1
15	8.696411	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=8 Win=420 Len=0
16	8.696907	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=8 Ack=1 Win=255 Len=1
17	8.696979	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=9 Win=420 Len=0
18	8.698088	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=9 Ack=1 Win=255 Len=1
19	8.698154	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=10 Win=420 Len=0
20	8.699791	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=10 Ack=1 Win=255 Len=1
21	8.699865	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=11 Win=420 Len=0
22	10.741228	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=11 Ack=1 Win=255 Len=1
23	10.741312	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=12 Win=420 Len=0
24	10.741515	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=12 Ack=1 Win=255 Len=1
25	10.741574	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=13 Win=420 Len=0
26	10.741759	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=13 Ack=1 Win=255 Len=1
27	10.741797	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=14 Win=420 Len=0
28	10.742800	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=14 Ack=1 Win=255 Len=1
29	10.742843	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=15 Win=420 Len=0
30	10.742190	127.0.0.1	127.0.0.1	TCP	45	65287 → 65286 [PSH, ACK] Seq=15 Ack=1 Win=255 Len=1
31	10.742229	127.0.0.1	127.0.0.1	TCP	44	65286 → 65287 [ACK] Seq=1 Ack=16 Win=420 Len=0

> Frame 1: 72 bytes on wire (576 bits), 72 bytes captured (576 bits) on interface \Device\NPF_{Loopback, id 0

> Null/Loopback

> Internet Protocol Version 4, Src: 192.168.56.1, Dst: 224.0.0.251

> User Datagram Protocol, Src Port: 5353, Dst Port: 5353

> Multicast Domain Name System (query)

0000 02 00 00 00 45 00 00 44 50 be 00 00 ff 11 91 45E..D P.....E

0010 c0 a8 38 01 e0 00 00 fb 14 e9 14 e9 00 30 b1 fe ..8.....0..

0020 00 00 00 00 00 01 00 00 00 00 00 0b 5f 67 6fgo

0030 6f 67 6c 65 63 61 73 74 04 5f 74 63 70 05 6c 6f oglecast _tcp_lo

0040 63 61 6c 00 00 0c 00 01 cal.....

wireshark_Adapter for loopback traffic captureD3PIT3.pcapng

Packets: 316 · Dropped: 0 (0.0%)

Profile: Default

Wireshark interface showing a packet capture on the adapter for loopback traffic capture. The packet list shows a single packet (No. 230) at time 49.278180, source 127.0.0.1, destination 127.0.0.1, protocol HTTP, length 911 bytes. The packet details pane shows the following structure:

- Frame 230: 911 bytes on wire (7288 bits), 911 bytes captured (7288 bits) on interface \Device\NPF_{...}, id 0
- Null/Loopback
- Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1
- Transmission Control Protocol, Src Port: 49972, Dst Port: 8000, Seq: 1, Ack: 1, Len: 867
- Hypertext Transfer Protocol
- HTML Form URL Encoded: application/x-www-form-urlencoded

The packet bytes pane shows the raw data in hexadecimal and ASCII. The ASCII column shows the following text:

```
POST /login HTTP/1.1
Host: 127.0.0.1
Content-Type: application/x-www-form-urlencoded
Content-Length: 867
Keep-Alive: timeout=5, max=1000
Connection: keep-alive
```

Wireshark interface showing a packet capture on the adapter for loopback traffic capture. The packet list shows a single packet (No. 230) at time 49.278180, source 127.0.0.1, destination 127.0.0.1, protocol HTTP, length 911 bytes. The packet details pane shows the following structure:

- Frame 230: 911 bytes on wire (7288 bits), 911 bytes captured (7288 bits) on interface \Device\NPF_{...}, id 0
- Null/Loopback
- Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1
- Transmission Control Protocol, Src Port: 49972, Dst Port: 8000, Seq: 1, Ack: 1, Len: 867
- Hypertext Transfer Protocol
- HTML Form URL Encoded: application/x-www-form-urlencoded

The packet bytes pane shows the raw data in hexadecimal and ASCII. The ASCII column shows the following text:

```
POST /login HTTP/1.1
Host: 127.0.0.1
Content-Type: application/x-www-form-urlencoded
Content-Length: 867
Keep-Alive: timeout=5, max=1000
Connection: keep-alive
```