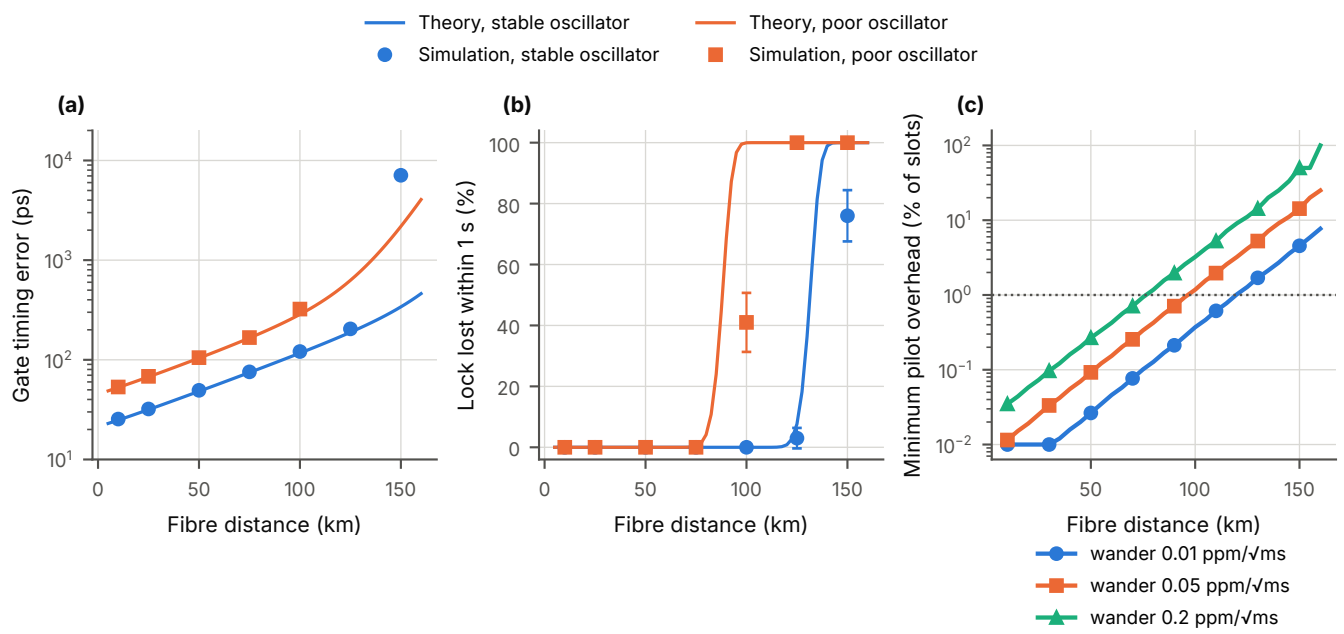
Theory, stable oscillator
Simulation, stable oscillator
Theory, poor oscillator
Simulation, poor oscillator
(a)
Gate timing error (ps)
Fibre distance (km)
(b)
Lock lost within 1 s (%)
Fibre distance (km)
(c)
Minimum pilot overhead (% of slots)
Fibre distance (km)
wander 0.01 ppm/√ms
wander 0.05 ppm/√ms
wander 0.2 ppm/√ms