



## Day 5 Review and practice practical

1. Open Cisco Packet Tracer and create a new project file named 'HomeWiFiNetwork.pkt' with three PCs and one wireless router connected appropriately.

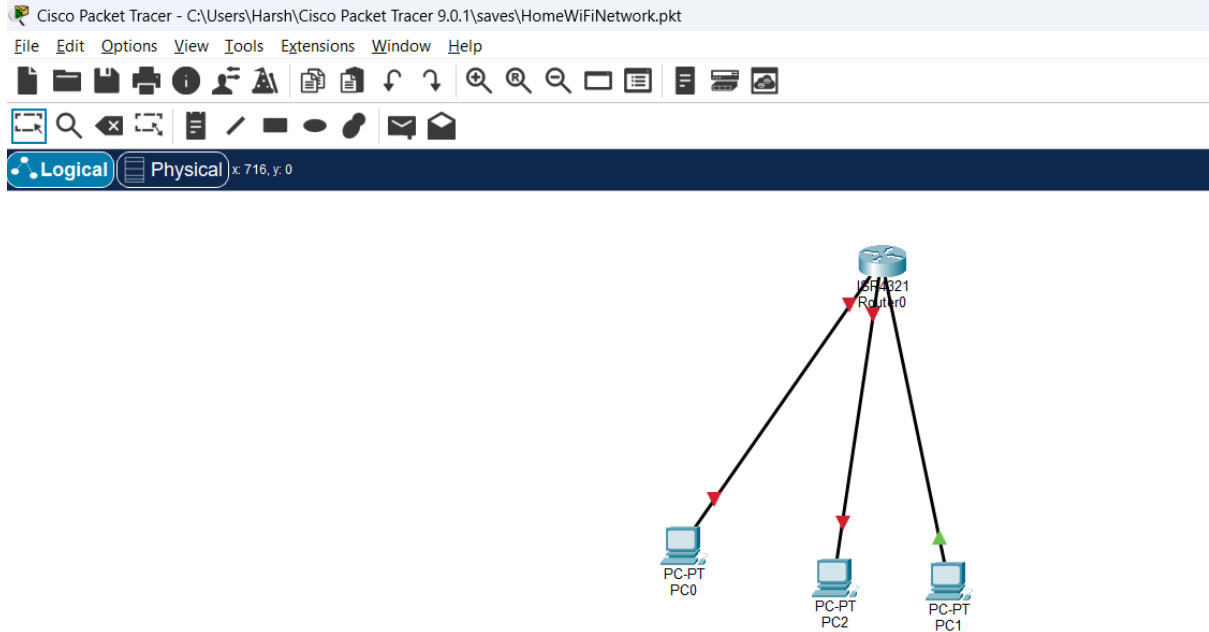


Created a network with three PCs connected to a Cisco router in Cisco Packet Tracer and saved the project as HomeWiFiNetwork.pkt. |

2. Assign static IP addresses to each PC in your Packet Tracer network so they are on the same subnet (e.g., 192.168.10.x), and configure the default gateway to the router's IP.

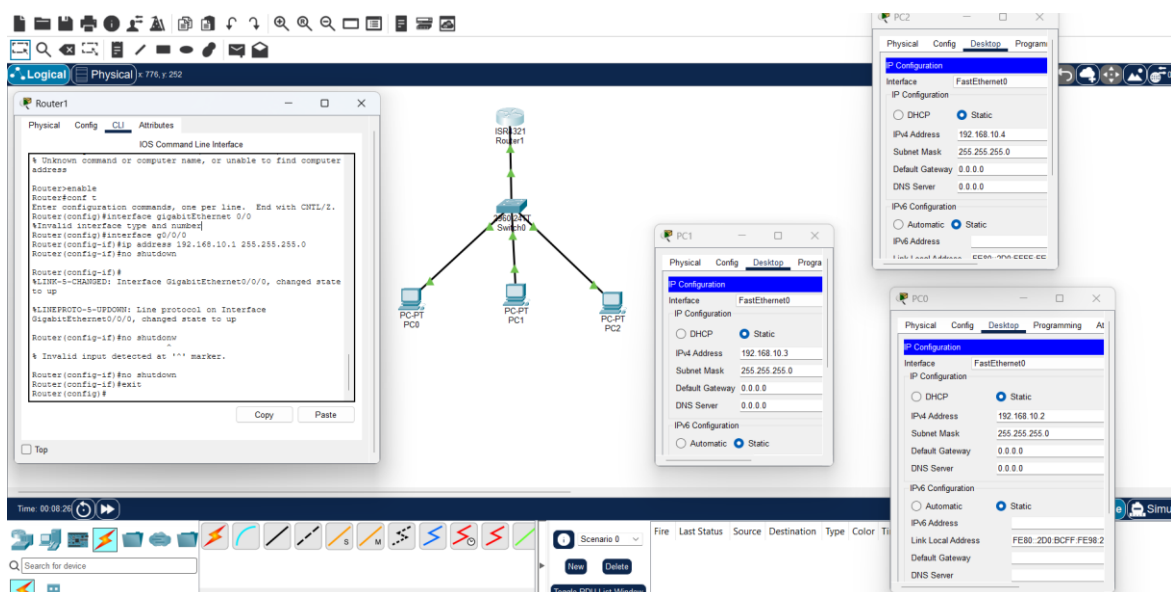

Static IP addresses were assigned to all three PCs on the same subnet, and the router was configured as the default gateway.

3. Test connectivity by using the Packet Tracer 'ping' tool to verify that all PCs can communicate with each other and the router.

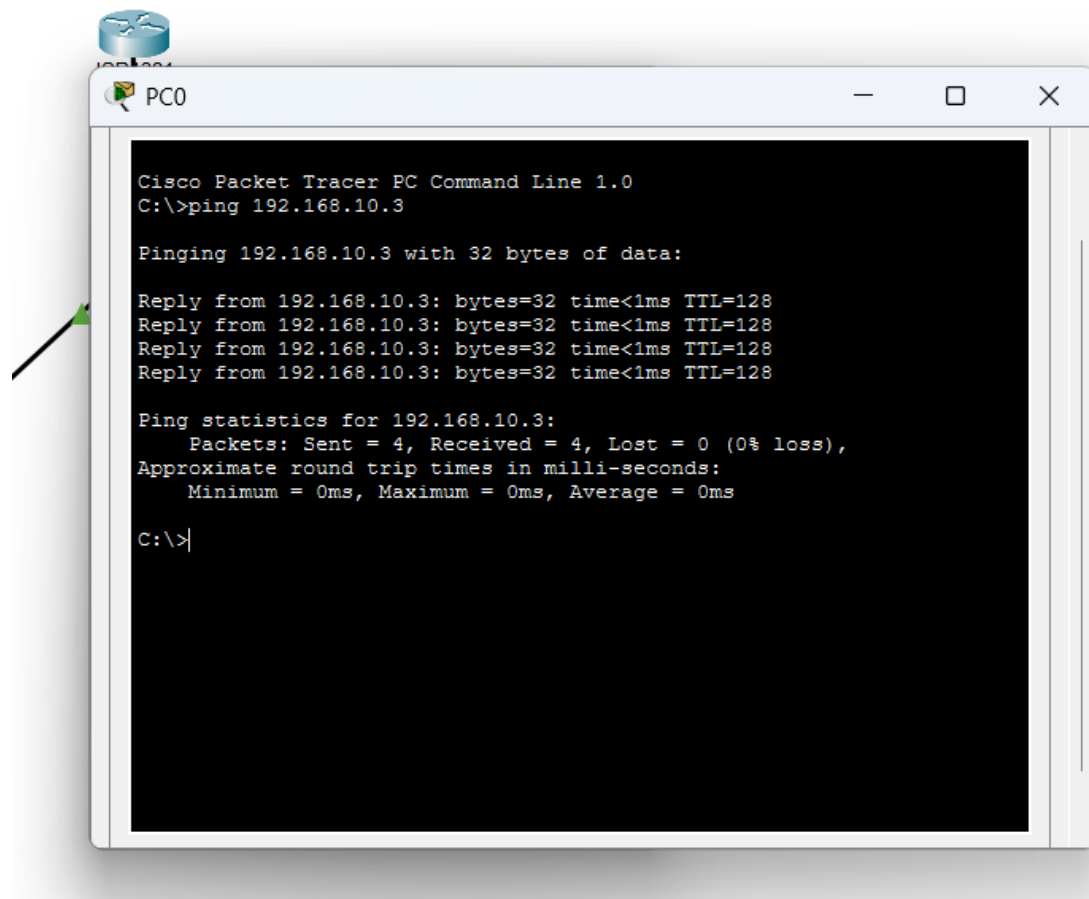

PC0 successfully communicated with PC1 using the ping command, with 0% packet loss

4. Document each step you took to build and configure your Packet Tracer network, including screenshots of your topology and the IP configuration windows for each PC, in a Word or PDF file.

### Packet Tracer Network Documentation

#### Step 1: Create the Network

Opened Cisco Packet Tracer and created a new project. Added **one router and three PCs** and connected the PCs to the router.

#### Step 2: Assign Static IP Addresses

Configured static IP addresses for all three PCs using the same subnet:

|  | <b>Device</b> | <b>IP Address</b> | <b>Subnet Mask</b> | <b>Default Gateway</b> |
|--|---------------|-------------------|--------------------|------------------------|
|--|---------------|-------------------|--------------------|------------------------|

|  |     |              |               |              |
|--|-----|--------------|---------------|--------------|
|  | PC0 | 192.168.10.2 | 255.255.255.0 | 192.168.10.1 |
|--|-----|--------------|---------------|--------------|

|  |     |              |               |              |
|--|-----|--------------|---------------|--------------|
|  | PC1 | 192.168.10.3 | 255.255.255.0 | 192.168.10.1 |
|--|-----|--------------|---------------|--------------|

|  |     |              |               |              |
|--|-----|--------------|---------------|--------------|
|  | PC2 | 192.168.10.4 | 255.255.255.0 | 192.168.10.1 |
|--|-----|--------------|---------------|--------------|

### **Step 3: Configure the Router**

Configured the router interface with the gateway IP:

enable

configure terminal

interface gigabitEthernet 0/0

ip address 192.168.10.1 255.255.255.0

no shutdown

exit

end

### **Step 4: Test Connectivity**

Opened **Command Prompt** on PC0 and used:

ping 192.168.10.3

The ping was successful with **4 packets sent, 4 received, and 0% packet loss.**

### **Step 5: Save the Project**

Saved the Cisco Packet Tracer project as:

HomeWiFiNetwork.pkt

### **Result**

The network was successfully created and configured with static IP addresses, and connectivity between the PCs was verified using the ping command.