


**DOUBLE CHARGE & SOLUBLE SALT
COLLECTION**



INDEX

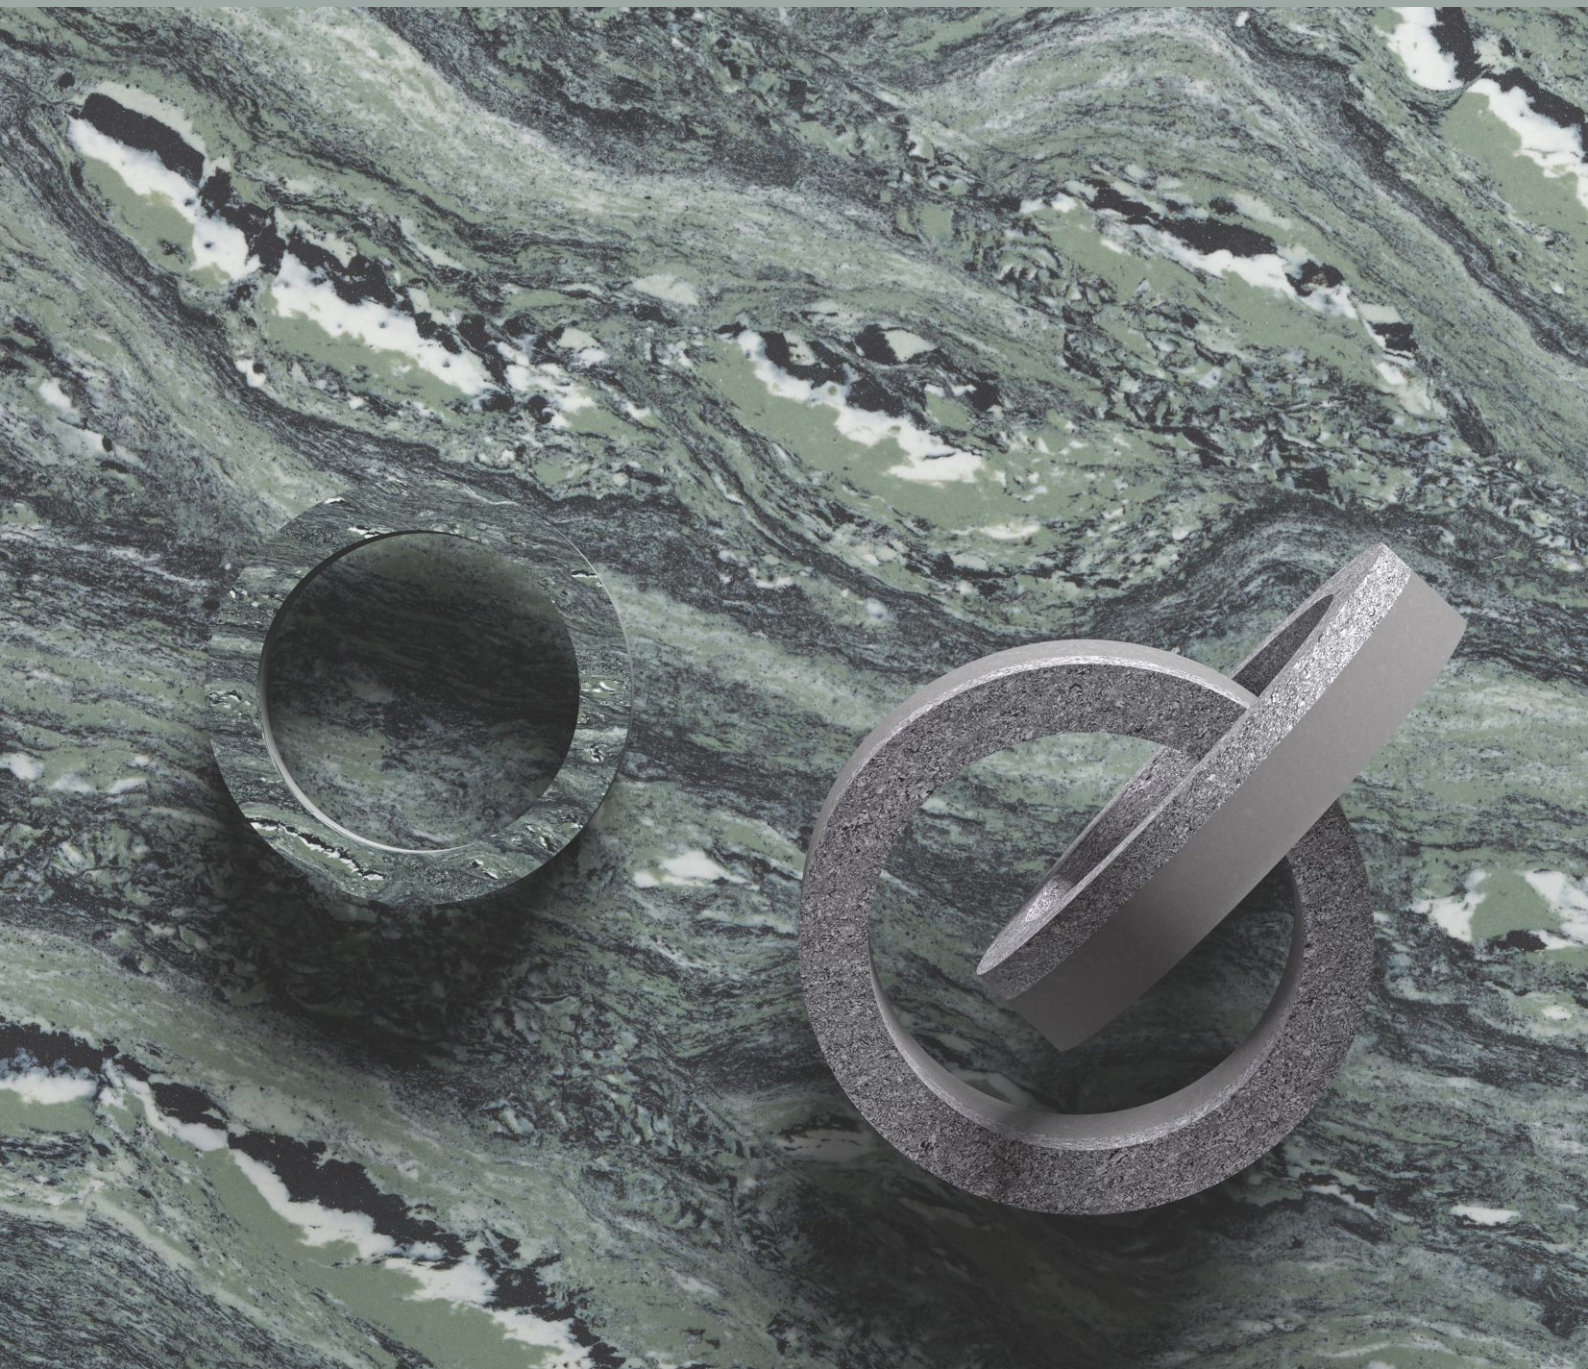

Double Charge

60X120CM
80X80CM
60X60CM

Page 14



Soluble Salt

60X60CM

Page 42



COLLECTION
INTRODUCTION

SURFACES EPITOME OF STRENGTH

Marbonite from the house of Johnson ushers in a new era of modern surfaces, offering surface innovation on already perfected vitrified tiles. And with this collection, Marbonite is reinventing the iconic Double Charge and Soluble Salt tiles, which once set the industry standard. The collection unites the indomitable strength of Double Charge tiles and the versatility and affordability of the Soluble Salt tiles with Marbonite's advanced stain-free innovation. This range is tailored for contemporary spaces that demand both resilience and refined elegance

TIME TESTED & TIMELESS



Beauty That's More Than Skin Deep

Marbonite tiles feature a robust design that runs 2-3mm deep into the tile body. This isn't a print; it's a permanent part of the floor that won't fade, wear, or scratch away.



Advanced Feeder-Press Technology

Crafted through a superior feeder and press technology using special clay and advanced firing, Marbonite Double Charge tiles are built for lasting durability. Unlike low-cost alternatives made with cheaper materials and surface prints, Marbonite Double Charge delivers strength that stands the test of time.



FEATURES



Superior Scratch Resistance

Engineered with a superior manufacturing process, Marbonite Double Charge tiles are the ultimate robust surface for your floors. With a hardness rating of MOH 6, they are highly resistant to scratches and daily wear and tear.



Engineered Flatness. Elevated Elegance.

Unlike regular glazed tiles, where strong waviness in light reflection can strain the eye and appear visually uneven, Marbonite tiles maintain a true flat surface that enhances comfort and aesthetic appeal.

The superior flatness of Marbonite also ensures no warpage - a common concern in other products - ensuring precise alignment and long-term performance.

The result?
An elegant, refined surface that looks pleasant, feels premium, and performs flawlessly.





STAIN-FREE INNOVATION

HARD TO STAIN, ALWAYS SPOTLESS



STAIN-FREE



EASY TO
CLEAN

With an exceptionally low water absorption rate of just 0.05%, Marbonite tiles offer extremely low porosity, ensuring superior strength and durability. In comparison, standard Glazed Tiles tiles have a water absorption rate of up to 0.5%—nearly 10 times higher. This significantly lower porosity enhances performance, delivering better stain resistance, improved longevity, and a more resilient surface ideal for high-traffic spaces.

SIZES THAT BRING IDEAS TO LIFE

This collection comes in a versatile array of sizes, expertly assembled for easy, elegant layouts in different settings. The collection features three sizes in the Double Charge range and one size in the Soluble Salt range. Each dimension is thoughtfully designed to realize your most ambitious design visions.

60X120CM

60X60CM

80X80CM

60X60CM



APPLICATION
AREAS

TILES THAT ADAPT TO ANY SPACE

The Marbonite Double Charge and Soluble Salt range is crafted for limitless application possibilities. The durability, the resistance, and the stain-free properties of the surfaces open rooms to a wider range of application opportunities, making the tiles ideal for heavy-duty environments, environments like kitchens where spills are a common occurrence and in modern homes that demand resilience against spills, chemicals, and daily wear.



DOUBLE CHARGE
60X120CM | 80X80CM | 60X60CM

Double Charge Tiles built for strength and shine. Durable, low-maintenance, and stylish – perfect for spaces that demand lasting elegance.

ALBIZA BEIGE



360°
View

POLISHED

ALBIZA GREY



360°
View

POLISHED

ALBIZA NATURA



360°
View

POLISHED



ALBIZA NERO



POLISHED

ALBIZA ROSO



POLISHED

ALBIZA WHITE



POLISHED

ALMAZE CREMA



POLISHED

ALMAZE SLATE



POLISHED

ALMAZE WHITE



POLISHED

ALTIS CREMA




POLISHED

ALTIS WHITE



POLISHED

ANGLO CARAMEL

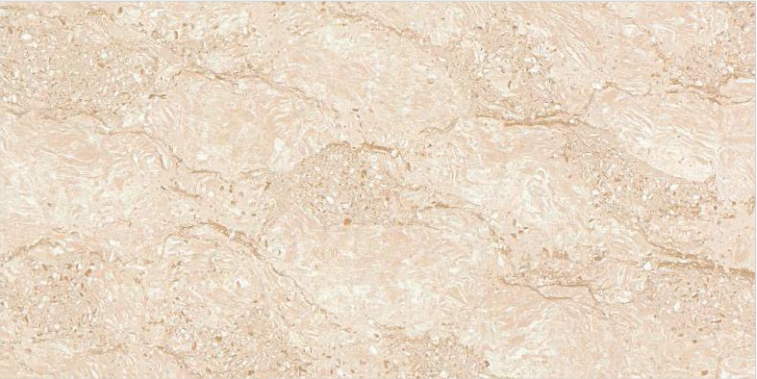

POLISHED



ANGLO GOLD



POLISHED

DRAGON AQUA



POLISHED

ANGLO MINT




POLISHED

DRAGON CREMA



POLISHED

ANGLO WHITE

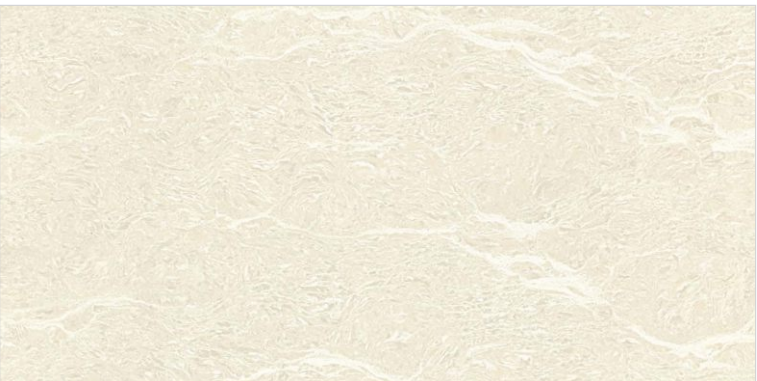

POLISHED

DRAGON ROSE



POLISHED

DRAGON WHITE



POLISHED

PERLIN GOLD



POLISHED

PERLIN AZUL



POLISHED

PERLIN SLATE



POLISHED

PERLIN CREMA



POLISHED

PERLIN NERO



POLISHED

PERLIN OLIVE




POLISHED

PERLIN PINK



POLISHED

PERLIN WHITE

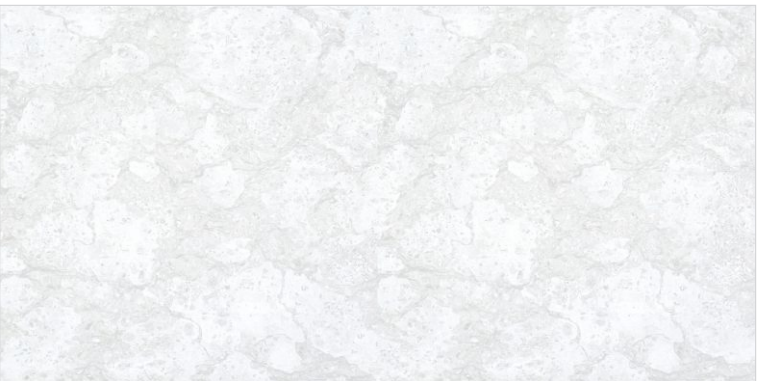

POLISHED




PRISM FLOW WHITE



POLISHED

PRISM PLAIN WHITE



POLISHED



TORINO BIANCO




POLISHED

TORINO BEIGE



POLISHED

TORINO MAPLE

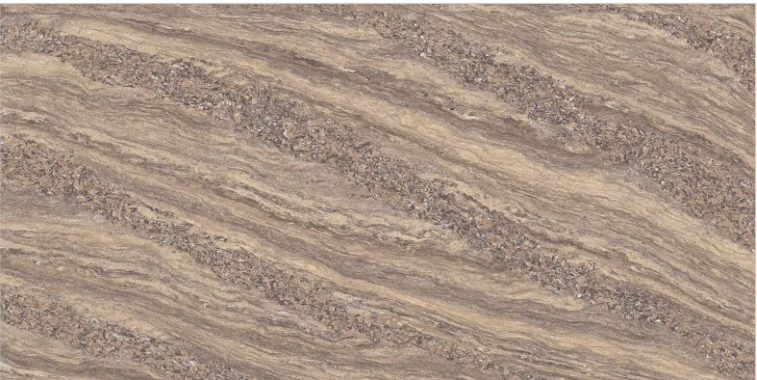

POLISHED

TORINO AQUA




POLISHED

TORINO ASH



POLISHED

TORINO ROSE

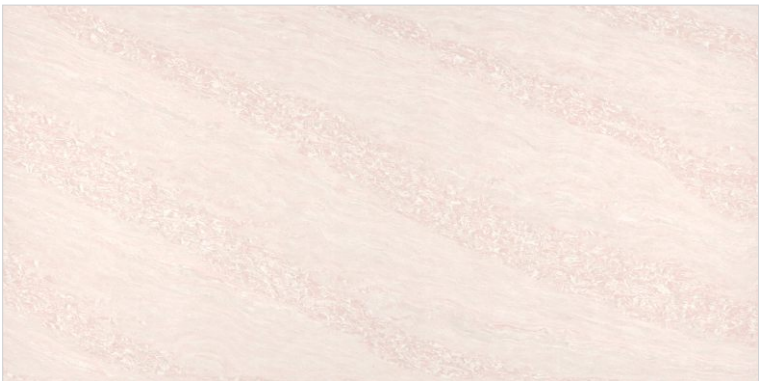

POLISHED

ALBANO LEMON



POLISHED



ALBANO ROSSEL



POLISHED



ALBANO WHITE



POLISHED




ELENTA SNOW ALLURE



POLISHED



PEARL WHITE

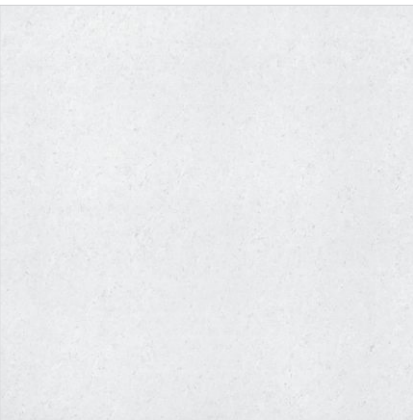

POLISHED



ALBITO ALMOND



POLISHED

ALBITO LATTE LT




POLISHED

ALBITO NATURA LT



POLISHED

ALBITO NERO

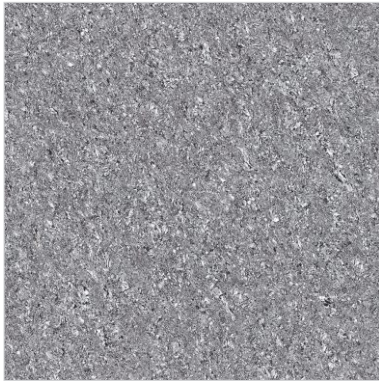

POLISHED

ALBITO BLACK



POLISHED

ALBITO COFFEE



POLISHED

ALBITO PEACH




POLISHED

ALBITO ROSSEL LT




POLISHED

ALBITO LEMON LT

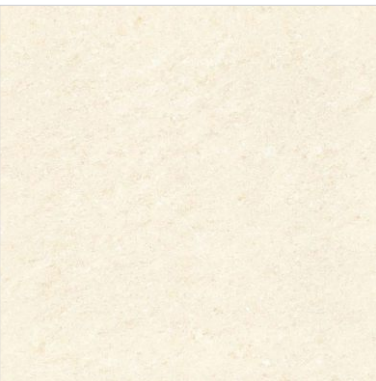


POLISHED

ALBITO MIST LT

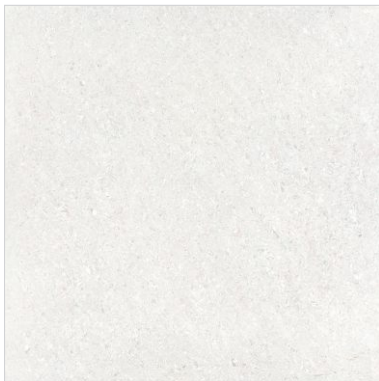


POLISHED

ALBITO WHITE LT

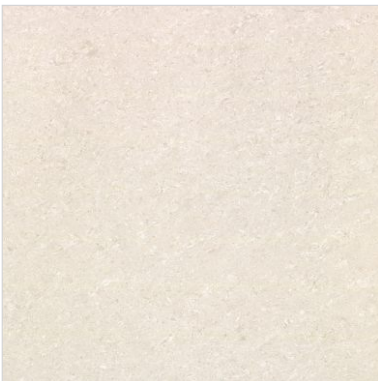

POLISHED

AGILE SNOW LT

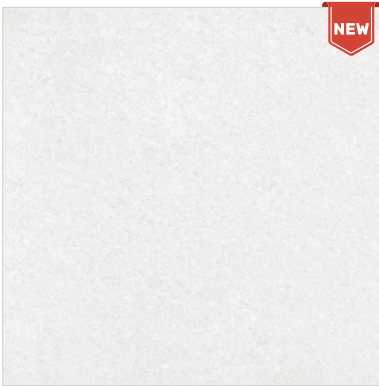


POLISHED

AGILE WHITE LT



POLISHED

AGILE LEMON LT

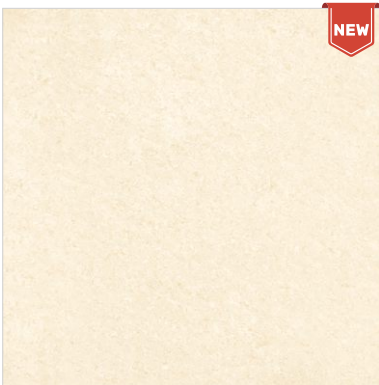


POLISHED

AGILE BRONZE DK



POLISHED

AGILE ASH DK

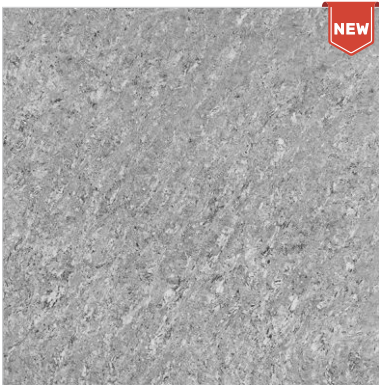

POLISHED



ARNAVA WHITE



360°
View

POLISHED


ARNAVA ROSSEL



360°
View

POLISHED

ARNAVA NERO

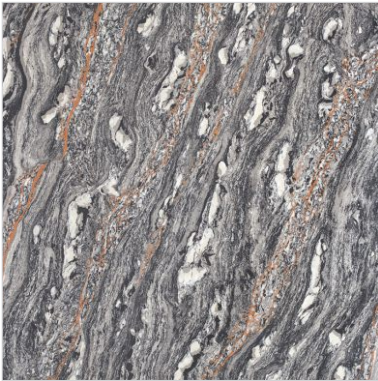

360°
View

POLISHED

ELENTA SERENITY SNOW



360°
View

POLISHED

ARNAVA CREMA



360°
View

POLISHED

ARNAVA PINK



360°
View

POLISHED

ANGLO CARAMEL



360°
View

POLISHED

ANGLO MINT



360°
View

POLISHED


ARNAVA VERDE



360°
View

POLISHED

ARNAVA OLIVE

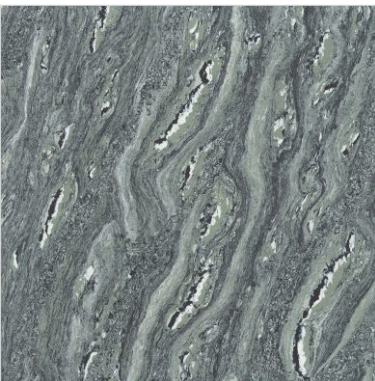

360°
View

POLISHED

NERON VERDE



360°
View

POLISHED

NERON GOLD



360°
View

POLISHED

GENNEY SNOW



POLISHED

GENNEY CREMA




POLISHED

PRISM FLOW WHITE



POLISHED

PRISM PLAIN WHITE

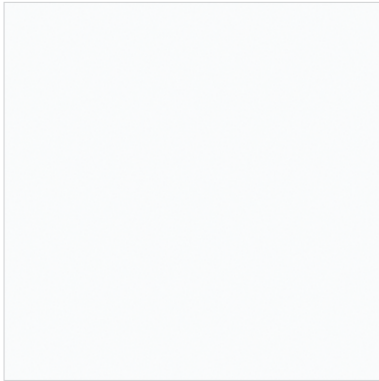

POLISHED

GENNEY PINK




POLISHED

GENNEY VERDE



POLISHED

ANTARTIC WHITE (MW)

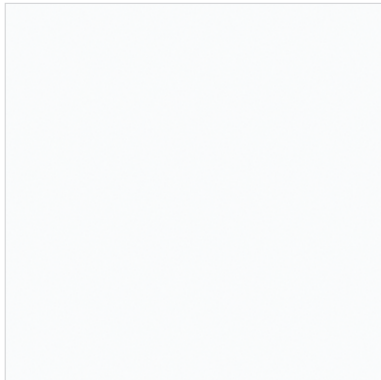

POLISHED

GENNEY LAVA



POLISHED

GENNEY NERO



POLISHED



SOLUBLE SALT 60X60CM

Soluble Salt Tiles combine elegance, durability, and value. With refined patterns and a smooth finish, they enhance both residential and commercial spaces, delivering lasting style with everyday strength.

ANDROMEDA



360°
View

POLISHED

APRICENA



360°
View

POLISHED

ASTORIA



360°
View

POLISHED

AVEO



360°
View

POLISHED

CLARA



360°
View

POLISHED

CREMA ATHOS



360°
View

POLISHED



DAISY WHITE



POLISHED

DEKOVEN



POLISHED

STYRA



POLISHED

TUSCANIA



POLISHED

ELENTA



POLISHED

EMILIO



POLISHED

VENEER




POLISHED

ANDROMEDA (TR) - MATT



POLISHED

IVORY




POLISHED

ROSARIO



POLISHED

IVORY (TR) - MATT



POLISHED

TECHNICAL SPECIFICATION

S. No	Property	ISO 13006:2018 / EN 14411 Group Bla Requirement	Indian Standard IS 15622:2017 Group Bla Requirement	MARBONITE (DC) Value	Test Method
	Dimensions & Surface Quality	Whichever is less	Rectified edge		
1	Deviation in Length & Width	± 0.3% or ±2.0mm	± 0.1 %	± 0.1%	ISO 10545-2 / IS 13630-1
2	Deviation in Thickness	± 5% or ±0.5mm	± 5 %	± 4%	ISO 10545-2 / IS 13630-1
3	Straightness of Sides	± 0.3% or ±0.8mm	± 0.1 %	± 0.1%	ISO 10545-2 / IS 13630-1
4	Rectangularity	± 0.3% or ±1.5mm	± 0.1 %	± 0.1%	ISO 10545-2 / IS 13630-1
5	Surface Flatness (Edge Curvature, Centre Curvature & Warpage)	± 0.4% or ±1.8mm	± 0.5 %	± 0.15%	ISO 10545-2 / IS 13630-1
6	Surface Quality	Min 95% free from visible defects	Min 95% free from visible defects	> 95% free from visible defects	ISO 10545-2 / IS 13630-1
	Physical Property				
7	Water Absorption	≤ 0.5%	Average ≤0.08%, Individual Max 0.1%	≤ 0.05%	ISO 10545-3/ IS 13630- 2
8	Modulus of Rupture	≥ 35 N/mm ²	Average 35 N/mm ² , Individual 32N/mm ² , Min	≥ 38N/mm ²	ISO 10545-4/ IS 13630-6
9	Breaking Strength	≥ 1300 N	Min1300 N	≥ 1500 N	ISO 10545-4 / IS 13630-6
10	Moisture expansion	report value	0.02 mm/m, Max	≤ 0.02 mm/m	ISO 10545-10 / IS 13630-3
11	Scratch hardness of surface (Moh's scale)	-	5, Min	≥ 5	IS 13630 -13
12	Coefficient of Linear Thermal Expansion	report value	Max, 6 x 10 ⁻⁶ K ⁻¹	≤ 6 x 10 ⁻⁶ K ⁻¹	ISO 10545-8/ IS 13630-4
13	Thermal Shock Resistance	report result	10 cycles Min	No Damage	ISO 10545-9 / IS 13630 -5
14	Impact Resistance	report value	0.55, Min	≥ 0.55	ISO 10545-5 / IS 13630-14
15	Coefficient of friction	-	Manufacturer to declare	≥0.3	ANSI A 326.3
16	Frost Resistance	report result	required if requested by purchaser	No Damage	ISO 10545-12 / IS 13630-10
17	Resistance to Deep Abrasion of Unglazed Tiles	≤ 175 mm ³	Max 140 mm ³	≤ 140mm ³	ISO 10545- 6 / IS 13630-12
18	Bulk Density (g/cc)	-	2.2, Min	≥ 2.2	ISO 10545-3 / IS 13630-2
19	Color Resistance to UV light	report result	-	No change in color	DIN 51094
20	Chemical Property (cleansers except to cleansing agents containg Hydrofloric acids and its compounds)				
a	Resistance to Staining - Unglazed Tiles	-	Class 2, Min	Class 2, Min (BIS)	ISO 10545-14 / IS 13630-7
b	Resistance to Household Chemicals and Swimming Pool water cleansers - Unglazed tiles	UB	report resistance class	UA	ISO 10545-13 / IS 13630-7
c	Resistance to acids and alkalis (Unglazed Tiles)	report resistance class	report resistance class	UA	ISO 10545-13 /IS 13630 -7

* ISO / IS technical specifications for Johnson tiles are applicable only for premium /1st Quality tile
Please inspect all tiles prior to installation, company will not entertain any complaints once tiles are laid / fixed

PACKING DETAILS

Product	Sizes	Finishes	No of Tiles/Box	Approx Area/Box (sq m)	Approx Weight/Box (kgs)	Approx Cartons/ 20' Container	Approx Area per Container (sq m)
60X120	60x120	DC Polished	2	1.44	25	1080	1555
80x80 Elite	80x80	DC Polished	3	1.92	36	750	1440
60x60 Elite	60x60	DC Polished	4	1.44	25.5	1058	1524

MARBONITE TILE FIXING INSTRUCTIONS

- Plaster the surface of the floor where the tiles will be laid with smooth finish and complete the plastering and curing at least two weeks prior to laying.
- Before fixing Marbonite tiles, lay them out in the desired pattern and make sure that they give an acceptable blend of shade, colour and design. Please note that certain amount of shade and size variation is inherent in the manufacture of vitrified tiles. Certain products will have intentional shade or colour variation to get the natural and elegant look, which is an integral element of the design resembling naturally created veins or shaded effect.
- The company bears no responsibility towards the tiles exposed to any outside process like transfers, printing, firing etc.
- For fixing Marbonite, we recommend using an appropriate product from the range of tile fixing adhesives from the ARDEX ENDURA (INDIA) PVT. LTD. Please follow the adhesive manufacturer's recommendations and instructions for best results.
- For fixing Marbonite tiles on the floor, using sand and cement, follow the instructions given below :
 - Use cement and sand mortar in the ratio of 1:4. Add some water to create a consistent paste.
 - Once the mixing has been completed do not add any further water and use the same within one hour.
 - Apply a 20-30 mm, layer of bedding material over an area of 1 square meter at a time on the surface of the area. Apply a fine slurry to the back of the tile to ensure proper and full bedding. Press gently for even adherence at the back of the tile.


DO NOT USE AN IRON HAMMER OR SOME HEAVY MATERIAL TO PRESS THE TILE.

- For fixing Marbonite tiles on Wall / Dado, we recommend using an appropriate product from the range of tile fixing adhesives from the ARDEX ENDURA (INDIA) PVT. LTD. with proper trowelling method for 100 per cent coverage behind the tiles and for peerless bonding. Please follow the adhesive manufacturer's recommendations and instructions for best results. We do not recommend the use of sand and cement for fixing on Dado.
- Mark and lay out the tiles from the center of the area to be laid so that cut tiles, if any, will be on the outer edges towards the walls.
- The work size which we try to maintain for better technical performance is 60 cm x 60 cm on average. It is advisable to maintain a gap of 1 mm to 2 mm between every tile to allow for possible expansion as per ISO tolerance norms.
- Complete the laying process by pressing the cut Marbonite tiles firmly into place along the walls/floors.
- Allow 3-4 days for bed curing. After this period fill the joints with cementitious or epoxy grouts from ARDEX ENDURA (INDIA) PVT. LTD. Use of grout sealant is recommended for keeping the grout free of dust.
- Fifteen minutes after finishing the grouting process, wipe off excess grout with a damp sponge and polish the tiles with a soft and dry cloth for a clean surface. The tiles can also be cleaned with a mild acid (However, Hydrofluoric acid and its derivatives should not be used). You can also use tile & stone cleaners from ARDEX ENDURA (INDIA) PVT. LTD.
- Please note that the company does not accept any liability in case of problems arising out of non-adherence to these fixing instructions.

13. THE COMPANY WILL BEAR NO RESPONSIBILITY AFTER THE TILES ARE FIXED.

- Kindly look for an arrow (→) on the back of the tile and follow the laying pattern as shown in Pic-1 :-

NOTHING IN THESE INSTRUCTIONS IS A SUBSTITUTE FOR GOD WORKMANSHIP AND SUPERVISION.

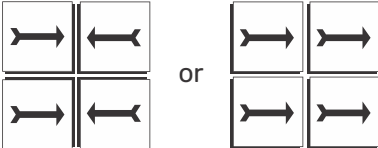


ABOUT US

H & R Johnson (India) has pioneered the Indian tile industry with its expertise and legacy earned over the last 67 years. As one of the leading brands, H & R Johnson (India) has been grounded on its vision to provide consistent high quality products across a mammoth collection of tiling and bathware solutions incorporating best-in-class technology & designs to meet the evolving needs of our customers. Johnson has the most modern manufacturing units across strategic locations in India, and we have grown to build a 64 million m² production capacity per annum across 11 state-of-art tile manufacturing plants (including joint ventures) and 2 faucet manufacturing plants. Being one of India's trusted tile brands, we proudly carry forward the legacy of trust and quality in every product we craft.



Built on standards. Backed by trust.

At H&R Johnson, trust begins at the source and being India's most trusted tiling brand, requires that trust to be maintained at every stage of creating a product that bears the name of the brand. Even the dies and punches are crafted in our own tool room for unmatched precision. From raw materials to the final finish, every step in the process comes with the same quality and assurance that is expected from us. We are among the few players in India with a huge range of porcelain tiles under EN14411, Group B1a certified by the leading auditor Sedex and marked by CE for our supreme quality.

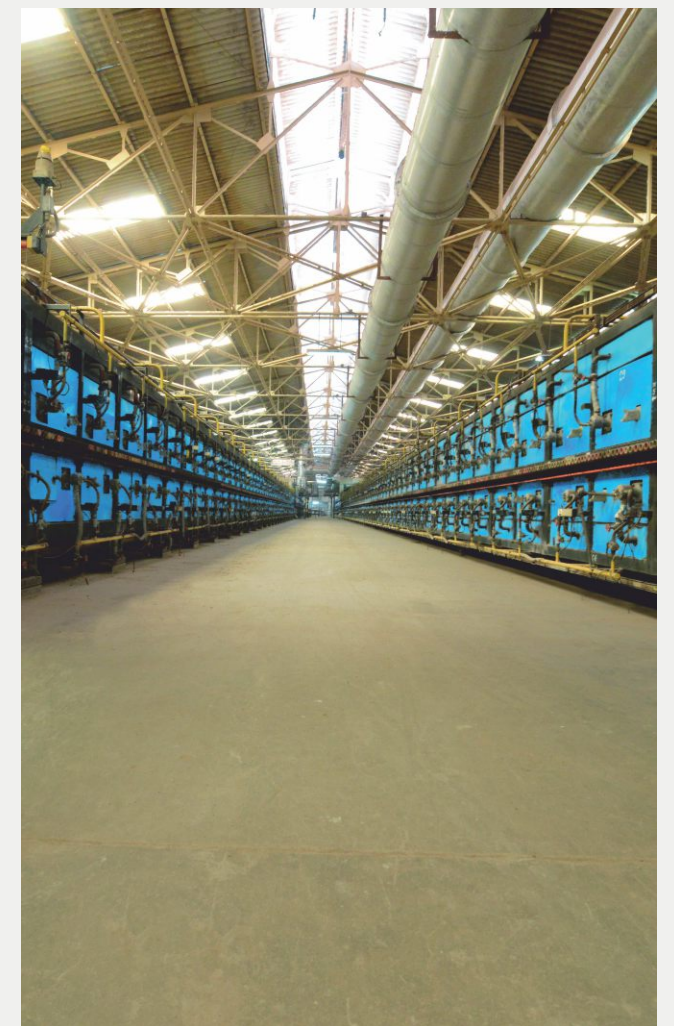

Shaping quality through excellence.

Johnson has the most modern manufacturing units across strategic locations in India. Our manufacturing facilities employ the best technology from world leaders in tile manufacturing equipment. All our plants are ISO compliant with both 9001 and 14001 certifications as well as OHSAS 18001 certification.

Certifications



H&R Johnson (India) is one of the India's largest tile manufacturer. It's commitment to quality, service and innovation is backed by certification from the world's leading accreditation bodies.

ISO 9001: 2015
For implementing a quality management system for the manufacture and supply of ceramic tiles.

ISO 45001: 2018
For implementing an occupational health & safety management system for the manufacturing of ceramic tiles.

ISO 14001: 2015
For implementing an environmental management system for the manufacturing of ceramic tiles

Certificate of merit for energy conservation, bureau of energy efficiency, ministry of power:
A recognition for the efficient use of energy and its conservation.

Plant has received safety award by National Safety Council:
Green pro is a product certification given by the confederation of Indian industry (CIL) which signifies environmentally conscious life cycle of the production; certification for eco-friendly products that helps customers make an informed choice towards sustainable products.

Griha:
Griha council is a joint initiative of ministry of new and renewable energy, GOI and The Energy and Resources Institute of Griha, India's national rating system for sustainable habitats.

Trusted brand:
Consumer based research award - Johnson has been awarded the Reader’s Digest Trusted Brand award and the Gold award in the tiles category, also received award for bath fittings category.

EXPERIENCE CENTERS

Location	HOUSE OF JOHNSON (Address)	Tel.:
Ahmedabad	F 106-107-108, Shivalik Plaza, Near Panjrapole Ambawadi, IIM Rd., Ahmedabad, Gujrat-380015.	079-48480010
Mumbai - Andheri	1 st Flr, Bonanza Building, Sahar Plaza, CTS No 243 (a), Kondivita Village, Mathurdas Vasanji Rd., Andheri Kurla Rd., Andheri (E), Mumbai-400059.	8433950699
Bhubaneshwar	Indradhanu Market, Near Reliance Fresh, Ray Tower, N4/237, IRC Village, Nayapalli, Bhubaneshwar-751015.	9777092717
Calicut - Kozikodhe	Gr. Flr., Tilal Tower, Survey No. 279/32, 279/33, Near Nexa Showroom, Kudilthod, Malaparamba Bypass, Calicut-673017.	0495-2357505
Chandigarh	SCO-214, Sector-14, Panchkula-134113.	0172-4637724
Chennai	82, 84 & 86 Bascon Maeru , 1 st flr, Kodambakkam High Road, Nungambakkam, Chennai-600034.	044-48611632
Coimbatore	Elysium Towers (Gr. Flr) No 21, ATT Colony Park Gate Road, Coimbatore-641 018.	0422-4382698
Delhi	First & Mezzanine Flr., B-1/G-3, Mohan Industrial Estate, Mathura Road, New Delhi-110044.	11-49526600
Ernakulam - Kochi	Gr. Flr, Door No. 11/300 F, Next to VTJ Hyundai, NH-47, Kundanoor, Maradu, Ernakulam-682304.	0484-4607321
Guwahati	1 st Floor, Above Royal Riders Honda, Near Rahul Kata, Pub Bragaon, Garchuk, Guwahati-781035.	8433721099
Indore	Shop No. 5, 6, 7, 8, Upper Gr. Flr, Exotica, Shalimar Township, Village Niranjapur, A.B. Rd., Indore-452001	0731-4007441
Kolkata	Trinity Tower, Gr. & 1st Flr, 83 JBS Haldane Avenue, Topsia Main Rd., Kolkata-700046.	033-48141987/48141988
Lucknow	1 st Flr, Plot No. CP-4, Vijayant khand 3, Gomtinagar Yojna, Lucknow - 226010.	9076900636
Pune	Sable House, Poona Snuff Factory, Sr. No. 11 A, Plot 408/4/5 Satara Road, Gultekadi, Pune-411037.	7350009364
Patna	S.K. Builders, 1 st Flr., SK Place, Saguna More, Patna, Bihar-801503.	8809616333
Raipur	2 nd Floor, MM Silver Plaza, Opp. Udyog Bhawan, Ring Road - 1, Raipur- Chattisgarh-492001.	0771-4919129
Thane	Shop No. 5, Gr.Floor, Cosmos Jewels, Near Dmart, Anand Nagar, Ghodbunder Rd., Thane West-400615.	022- 40691122
Trivandrum	1 st Flr., Sreedhanya Apex, TC 22/3720 (4) Vellayambalam, Sasthamangalam PO, Thiruvananthapuram Kerala-695010.	0471- 2720141
Varanasi	D59/103 D4, 1 st Flr., Ashakunj, Opp. Siddhartha Complex, Sibra Mehmoorganj Rd., Varanasi, Uttar Pradesh-221010.	0542- 2222620
Bengaluru	56 A, Ramamurthi Nagar Main Rd., opp. New Baldwin School, Dodda Banaswadi, Bengaluru-560043.	080- 41692976/41692060
Hyderabad	JSP Jubilee Crown (3 rd Flr.) Plot - 1270, Rd., No. 36, Jubilee Hills, Hyderabad - 500033.	040- 29802270/71/72

Location	OTHER STORES (Address)	Tel.:
Aurangabad HOJ	HOJ - Aurangabad-Gut No. 16/44, NH-211, Near Balapur Phata, Near Ramkisan Lawns, Beed Bypass Rd., Aurangabad-431005.	8433741799
Factory Outlet Silica	PJL, Survey No. 102, Gopinathpatnam Rd., Narayana Puram Village, Ungutur Mandal, Near Chebrolu, Elluru-534406.	
Bengaluru	TBK Pratap Tile Bath Kitchen Pvt. Ltd. No.39, Rajaram Mohan Roy Rd., Opp. Kanteerava Stadium, Bangaluru-560027.	080-22234310/22234330
Kunigal-Factory Outlet	M/s Prism Johnson Limited - factory Outlet, Plot No's-1 To 12 Kiadb Indl. Are,anchepalya Villege, Kunigal Taluk Tumkur-572126.	8433920399
Dewas-Factory Outlet	PJL, H & R Johnson (India) Division , Tile Bazaar, I. S. Gajra Industrial Area No. 2, In Front of Malwa Stripe, A. B. Rd., Dewas-455001.	
Pen-Factory Outlet	PJL, H & R Johnson (India) Division, Tile Bazaar, Village Khar Devli, Gadab, Taluka Pen, Raigad-402107.	8433936199
Vijayawada Mini	HOJ - 2 nd Flr., Plot No. 12, Rd., No.1, New Postal Colony, Patamata, Vijaywada-520010.	

YOU CAN ALSO REACH US AT

Region	Branch	Tel.:	Region	Branch	Tel.:
East	Kolkata	033-46021880	North	Jaipur	0141-2368329
	Bhubaneshwar	0674 6539836/37/2430240		Lucknow	9076900636
	Siliguri	9836065812		Varanasi	0542-2222620
	Guwahati	8135846661/7575900492		Patna	9576038781
	Ranchi	9576038118	South	Bengaluru	080-22234310/080-22234330
West	Mumbai	022 6986 7300		Hyderabad	040-29802270 / 71 / 72
	Thane	022-25867600 / 666		Vijayawada	9666429666
	Pune	020-41301164 / 31		Kochi	0484-4871277
	Aurangabad	8669600748		Kozhikode	0422-4382698
	Ahmedabad	079-48480010		Thiruvananthapuram	0471-2720141
	Raipur	0771-4919129		Chennai	044-28544116 / 28541881
	Indore	0731-4007441		Coimbatore	0422-4382698
North	Chandigarh	0172-4656940		Trichy	9486718544
	Delhi	011-49526600			

For address and contact numbers of our Johnson Exclusive Showrooms and Authorized Retailers, please visit our website www.hrjohnsonindia.com



Corporate Office:

"Rahejas", Main Avenue, 3rd Floor,
V. P. Road, Santacruz (W), Mumbai -400054

Registered Office:

305, Laxmi Niwas Apartments, Ameerpet, Hyderabad - 500016, Telangana, India.

☎ 022 6986 7300 📞 +91 84510 57484 📞 1800-210-7484

🌐 www.hrjohnsonindia.com

✉ tiles.customercare@prismjohnson.in

For Export enquiries:

✉ exports.customercare@prismjohnson.in

Colors shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice. Sometimes, variations in shade or size may occur which is inherent to the ceramic industry. Before fixing the tiles, we urge you to read and follow the fixing instructions given on the carton box of the tiles. The company will not take any responsibility and will not accept any complaints of shade, size or planarity once the tiles have been fixed.

Although every effort is made to ascertain that all the information provided in this brochure is accurate before printing, errors may still happen. Please contact the local branch office for updated information before placing orders. The information contained in this catalog is given in good faith. The Company takes no liability on account of any loss or damage either consequential or otherwise as a result of the information provided therein.

