


REV.	ECN. NO.	APPD.
A	BW-1013-001	hongbo.suo

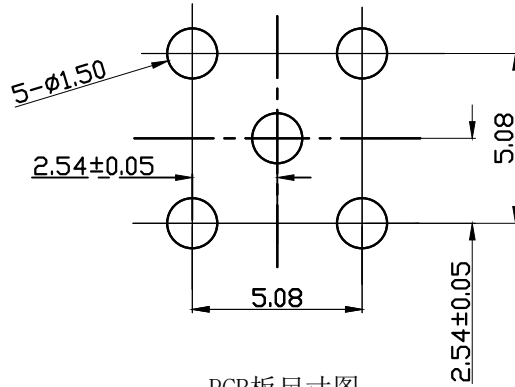



PCB板尺寸图

# 1. Electrical Characteristics

- 1.1 Impedance: 50 Ohm
- 1.2 Working Frequency: DC - 3 GHz
- 1.3 S.W.R.:  $\leq 1.5$
- 1.4 Working Voltage: 335V / max
- 1.5 Insulation Resistance: 1000 Mohm
- 1.6 Contact Resistance: Center Contact: 5 mohm
- 1.7 Outer Contact:  $\leq 2.5$  mohm

# 2. Environmental

- 2.1 Working Temperature Range:  $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 2.2 Salt spray test: 48H

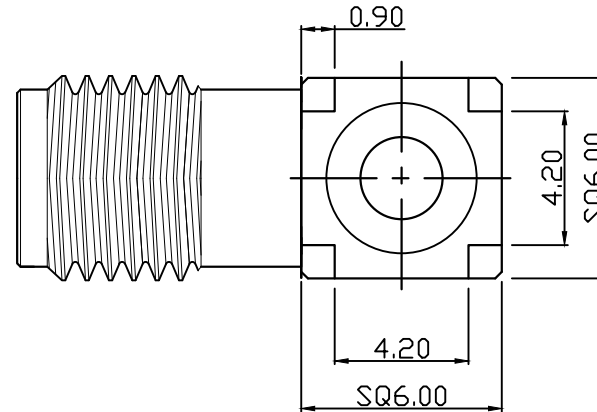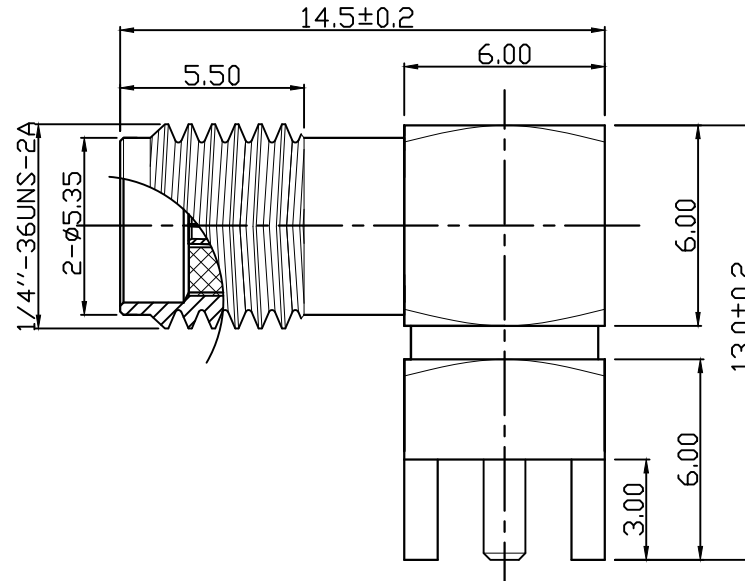

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SINOPOV COMMUNICATION TECHNOLOGY LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SINOPOV COMMUNICATION TECHNOLOGY GROUP.			Title:  SMA-K五角插针	<b>BonWorld</b>									
				PART NO. 25.02TA0-0001Y0									
X. ± /	X*. ± /	MAT'L SEE NOTES	APPD: hongbo.suo	DWG NO. HX-SMA-P-8248									
.X ± 0.2	.X* ± /	UNITS MM	CHKD: kN	 <table border="1"><tr><th>SCALE</th><th>SHEET</th><th>REV.</th></tr><tr><td>1:1</td><td>1/1</td><td>A</td></tr></table>				SCALE	SHEET	REV.	1:1	1/1	A
SCALE	SHEET	REV.											
1:1	1/1	A											
.XX ± 0.1	.XX* ± /	FINISH	DR: chunying.wei 2019.12.13										
.XXX ± 0.05	.XXX* ± /	SEE NOTES											