

Characterization and Water Content Estimation Method of Living Plant Leaves Using Terahertz Waves

Adnan Zahid ^{1,*} , Hasan T. Abbas ^{1,2,*} , Muhammad Ali Imran ¹ , Khalid A. Qaraqe ² , Akram Alomainy ³ , and Qammer H. Abbasi ¹ 

¹ School of Electronics and Nanoscale Engineering, University of Glasgow, Glasgow, U.K.; a.zahid.@research.gla.ac.uk, Muhammad.Imran@glasgow.ac.uk, Qammer.Abbasi@glasgow.ac.uk

² Department of Electrical and Computer Engineering, Texas A&M University, Doha-Qatar; hasan.abbas@qatar.tamu.edu, khalid.qaraqe@qatar.tamu.edu

³ School of Electronic Engineering and Computer Science, Queen Mary University of London, London, UK; a.alomainy@qmul.ac.uk

* Correspondence: a.zahid.1@research.gla.ac.uk; Tel.: +441413311713, hasan.abbas@qatar.tamu.edu

Version Thursday 4th July, 2019 submitted to Journal Not Specified

Abstract: An increasing global aridification due to climate change has made the health monitoring of vegetation indispensable to maintaining the food supply chain. Cost-effective and smart irrigation systems are required not only to ensure the efficient distribution of water, but also to track the moisture of plant leaves, which is an important marker of the overall health of the plant. This paper presents a novel electromagnetic method to monitor the water content (WC) and characterization in plant leaves utilizing the absorption spectra of water molecules in the terahertz (THz) frequency for four consecutive days. We extracted the material properties of leaves of eight types of pot herbs from the scattering parameters, measured using a material characterization kit in the frequency range of 0.75 to 1.1 THz. From the computed permittivity, it is deduced that the leaf specimens increasingly become transparent to the THz waves as they dry out with the passage of days. Moreover, the loss in weight and thickness of leaves were observed due to the natural evaporation of leaf moisture cells and change occurred in the morphology of fresh and water-stressed leaves. It is also illustrated that loss observed in WC on day 1 was in the range of 5% to 22%, and increased from 83.12% to 99.33% on day 4. Furthermore, we observed an exponential decaying trend in the peaks of the real part of the permittivity from day 1 to 4, which was reminiscent of the trend observed in the weight of all leaves. Thus, results in paper demonstrated that timely detection of water stress in leaves can help to take proactive action in relation to plants health monitoring, and for precision agriculture applications, which is of high importance to improve the overall productivity.

Keywords: Vegetation health monitoring, leaf water content, terahertz, sensing, plants health.

1. Introduction

Over the past decade, the terahertz (THz) technology has seen an increased amount of interest in the scientific community chiefly due to its non-ionizing and less pervasive radiation properties [1]. There has been significant progress in tapping the so-called terahertz gap 0.3 THz to 3 THz of the electromagnetic spectrum. The THz technology has found extensive use in applications such as the imaging of concealed items [2], material characterization [1], diagnostic applications including treatment of skin and dental care [3,4], effective and quality control of food [5], and telecommunication [1,6,7]. Furthermore, a distinguishing feature of the THz waves is that the water molecules exhibit a strong absorption spectrum in the pertinent frequency range, leading to novel bio-sensing applications.

Despite these substantial contributions, the utility of the THz technology in the environmental control/monitoring systems has not been explored in depth, especially for the purpose of the vegetation monitoring [8,9]. Unlike the microwave-based remote sensing techniques, the THz technology can provide

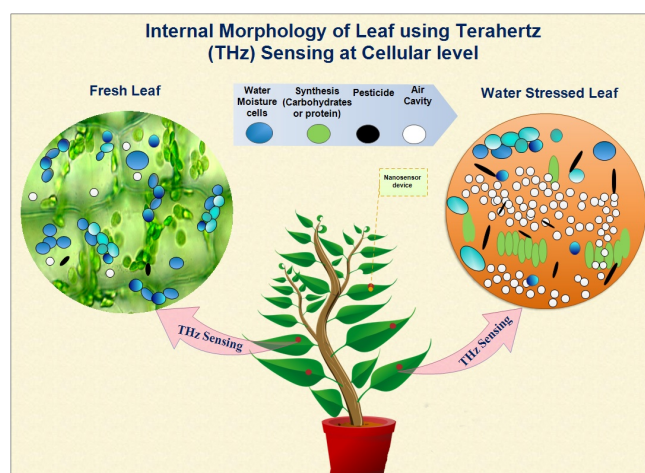


Figure 1. Internal morphology of fresh and water stressed leaf using terahertz sensing.

detailed insight into the health of a plant specimen in terms of the water content (WC) in the leaves [10]. Since, a leaf comprises of a composite biological structure of tissues and distinctive biomolecules like cellulose and synthesis compounds including proteins, carbohydrates and many other molecular weight compounds with different permittivity values [13] as depicted in Figure 1. Therefore, water is essential and important nutrients to the process of photosynthesis, transpiration in the overall process of growth [11]. Due to the high sensitivity and strong penetration feature of THz, it has a strong potential to disseminate through plants leaves at cellular level as shown in Figure 1 and can yield significant information of WC in leaves. Hence, it is significant to highlight the frequency dependence of the permittivity of leaves. Designing a smart and plant-specific irrigation system that monitors the leaf WC in a non-invasive manner is, therefore, critical in the current circumstances governed by global climate change that demand water conservation. Over the years, significant amount of contributions have been made [9–13], that address estimating the leaf's WC. There are techniques that offer high reliability yet they are inappropriate for long-term studies of the same plant leaves because of validity of measurements cannot be guaranteed. [13–17]

The technique such as the thermo-gravimetric, has also been used for the quantification of water content in plants leaves. Nevertheless, due to its destructive nature and problems related to its harmfulness to specimens has markedly reduces the reliability and is not suitable for estimation of WC in plants leaves. On contrary, some non-destructive methods have previously been used to determine the water status in plant leaves, which include thermal and hyper-spectral imaging [18][19], infrared [20] and magnetic resonance imaging (MRI)[21]. However, these techniques are limited by the resolution and thus, cannot provide any cellular-scale information about the plants [19]. In addition, these technique do not consider any environmental influence due to its low photon energy [14,19]. Lately, there has been a growing trend in the field of plant physiology and characterization of liquid to use THz time-domain spectroscopy (THz-TDS)[13,22], which is considered as a non-invasive technique, has been deployed in the field of plant physiology to detect anomalies proactively and has an enormous potential to measure the leaf water status under certain conditions, such as drought stress[12,13,15,23,24] and dehydration kinetics [19]. In addition, THz-TDS technology also has ability to investigate the structural behaviour and complex traits of leaves under particular environment[14,19]. Comparing THz-TDS technology to others, technique is proven to be more effective and reliable compared to other approaches. However, the experimental setup of THz spectroscopy is not portable and cost effective technique [22].

In this paper, we present a novel, non-invasive approach to monitoring the WC of plant leaves using the scattering parameters of a THz pulse. Using a well-known material extraction algorithm, we computed permittivity from the scattering parameters for eight types of leaves, which we observed for four consecutive days. The WC was then gauged from the decrease in the permittivity as days passed. This paper is an expansion and presents a detailed analysis of our earlier work [8]. The rest of the paper is structured as follows: Section 2 describes the experimental setup followed by the material characterization methods of plants leaves. Section 3 presents the measurement results and different parameters are discussed such as permittivity, the effect of weight

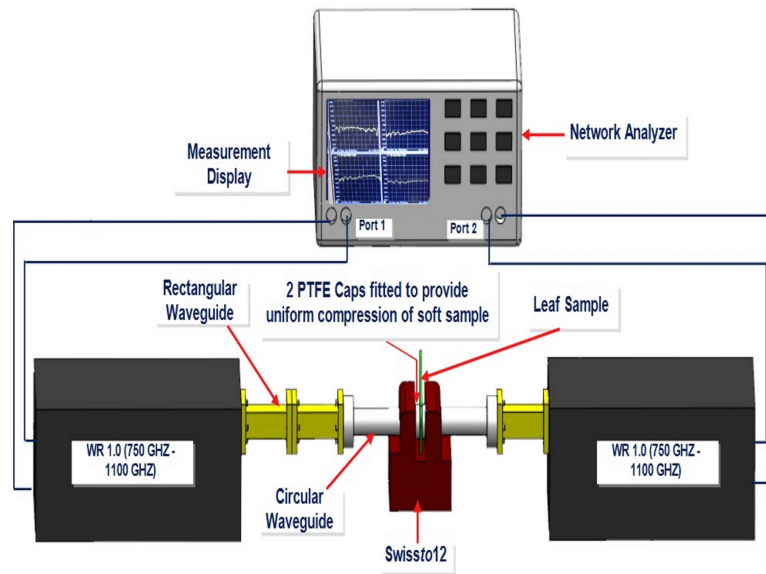


Figure 2. Schematic representation of experimental setup used for measurement of leaf sample. The leaf sample is placed between the two PTFE caps fitted to Waveguide

and thickness, and the refractive index of leaves, followed by a comparison of transmission response of all eight leaves between day 1 and 4. Finally, conclusion is discussed in Section 4.

2. Methods

2.1. Experimental Setup

We used a THz Swisst012 Material Characterization (MCK) to obtain the scattering parameters of the plant leaves. The MCK was attached to a microwave vector network analyzer (VNA) N5224A, the frequency range of which was shifted in the THz frequency range via an extender module WM-250 (WR1.0), enabling operation in the frequency range of 0.75 to 1.1 THz with a resolution of 2 GHz. The setup is used to measure the frequency dependant scattering response for a material under test (MUT). The MCK comprises two conical waveguide horn transitions with further two sections of the low-loss corrugated waveguide. A small aperture between the two low-loss corrugated waveguides allows the material samples to be inserted into the system during measurement. The small aperture between the pilot guides allows the material to be appropriately inserted into the system during measurements. Moreover, each half of the MCK comprises a waveguide which transitions from rectangular waveguide to the corrugated circular waveguide, followed by a section of low loss corrugated waveguide at the end. This prototype of MCK allows the THz test signal to propagate within an enclosed low-loss environment. The MUT is carefully placed between the two corrugated waveguides. Furthermore, one half of the MCK, is fixed, while the other half is moveable (to easily accommodate the insertion of the MUT to be measured). Hence, this make it feasible to measure the MUTs of various thicknesses. However, it is a requirement of the measurement technique that the thickness of the MUT is known in order that the material parameters can be derived from the S-parameters measured by the VNA. In order to avoid any structural damage while the leaf specimen was clamped in the MCK for observation, we used two PTFE caps that enabled a uniform compression of the samples as shown in Figure 2. Prior to the measurement, the setup was configured using the two-port short-open-load-thru (SOLT) calibration technique.

2.2. Sample Details

. Eight different kinds of pot herbs were used, namely coffee arabica, aromatic coriander, basil, baby-leaf, pea-shoot, parsley, lamb lettuce, and baby spinach. The fresh leaves were detached from the plants and placed in the laboratory for four consecutive days. The environment temperature for the measurements of leaves was

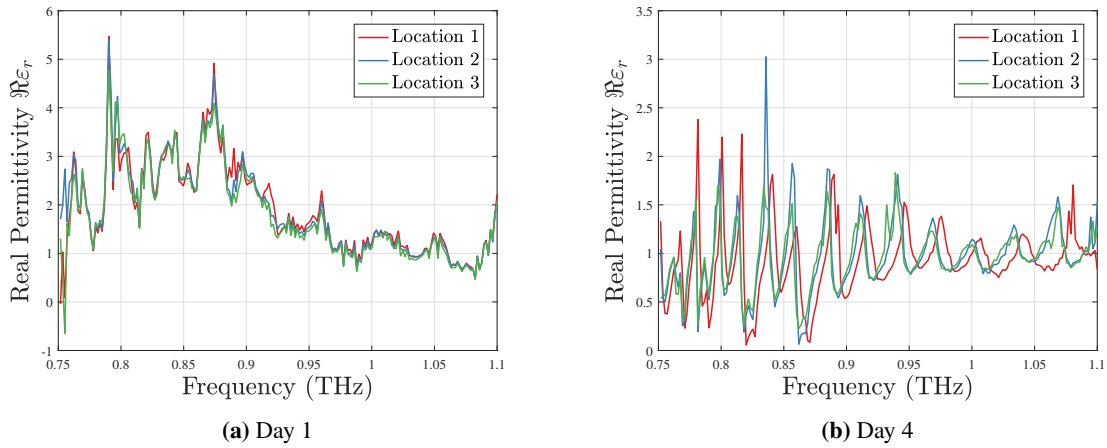


Figure 3. Real part of permittivity of coffee leaves at three different locations taken on day 1 and 4.

18.0 °C ± 0.1 °C, and the humidity was between 30 % ± 2 %. In this study, the weight and thickness of leaves were determined for four consecutive days using a precision electronic scale and Vernier calliper respectively. The leaves' thickness and weight were measured every 2 h during the natural evaporation of leaf moisture. We used a Vernier scale to measure the leaf thickness and this process was repeated to determine thicknesses at three different locations to ensure having similar all over the surface of a leaf, and found them in the threshold range of 40 μm to 4 mm. The weight of leaf was measured using a digital kitchen scale with a least count of 0.1 mg. All leaves were measured at three different locations and on every location, four various orientations were considered to investigate the behaviour of leaves. From these observations, the purpose was mainly to determine any unevenness in surface of leaves that could alter the electromagnetic parameters. As an example, Figure 3 showed the response of a coffee leaf at three various locations. Thus, it further illustrated that despite altering the orientations at every locations, no significant disparity could be observed, however, it displayed some sharp peaks at different frequencies on day 1 and 4, which certainly reflected a meaningful information about the presence of WC in leaves.

2.3. Material Characterization of Plant Leaves

The Nicholson-Ross-Weir (NRW) method [25] is the most common technique in which the dielectric parameters ϵ_r and μ_r of a planar material are extracted from a two-port VNA measurement in which the transmission and reflection coefficients are obtained through the S-parameters. This method belongs to the category of frequency-by-frequency material extraction in which every point from the frequency sweep is used. In general, the NRW method generates both the complex permittivity $\epsilon_r = \epsilon_r' - j\epsilon_r''$ and permeability, $\mu_r = \mu_r' - j\mu_r''$ of the specimen under test. Here, we assume that the leaves are non-magnetic and compute only the permittivity. One of the intrinsic problems of the NRW method is the periodicity of the phase of the electromagnetic wave that leads to ambiguous results. This problem has been discussed at length in other works [26–28]. In order to rectify this, we follow the step-wise approach in which the phase ambiguity is removed by using the phase delay information from the previous frequency point [29]. In this paper, we consider a plant leaf as a planar slab of thickness d which is positioned between two air-filled circular waveguides. With the help of an equivalent transmission line model, the reflection (Γ) and transmission (T) coefficients of a semi-infinite slab are expressed in terms of the measured s-parameters, S_{11} and S_{21} as [30],

$$\Gamma = \chi \pm \sqrt{\chi^2 - 1}, \quad T = \frac{S_{11} + S_{21} - \Gamma}{1 - (S_{11} + S_{21})\Gamma}, \quad (1)$$

where the intermediate variable χ is defined as $(S_{11}^2 - S_{21}^2 + 1) / 2S_{11}$. In the case of the slab having a finite thickness d , the transmission coefficient T can be described in terms of the propagation constant, γ as, $T = \exp(-\gamma d)$,

which can subsequently be written in the Euler form as $|T| \exp(-j\phi)$ where ϕ denotes the phase term. The propagation constant is then determined using [28],


$$\gamma = \frac{1}{d} \{-\log(|T|) - j\phi + j2\pi n\} \text{ where } n \in \mathbb{Z} \quad (2)$$

which results in an infinite number of branches of the complex valued root due to the logarithmic function, demonstrated by the presence of the $2\pi n$ term. The problem of selecting the proper branch is solved by the technique proposed in [29] in which at each frequency point, the phase delay information is recovered from the previous frequency point. If the phase difference, $\phi_i - \phi_{i-1} < \pi$, the method ensures the current branch is selected. The permittivity is then calculated by,


$$\varepsilon_r = \frac{\gamma}{\gamma_0} \left[\frac{1 - \Gamma}{1 + \Gamma} \right] \quad (3)$$

3. Measurement Results


The aim of this paper was to determine the electromagnetic properties of leaves including permittivity, refractive index and physiological features such as weight and thickness that can affect the WC of leaves. In addition, a strong correlation between the determined properties and WC of leaves was observed. Furthermore, the transmission response of all eight leaves were investigated for four consecutive days.

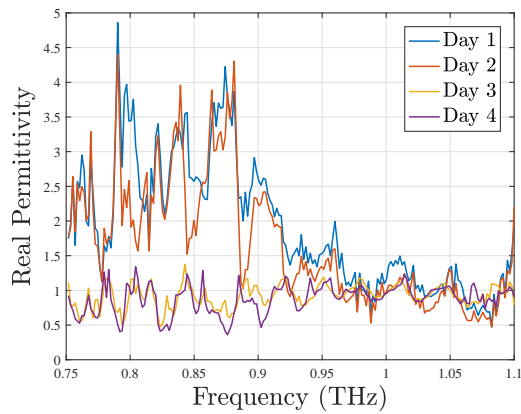


(a) Baby leaf

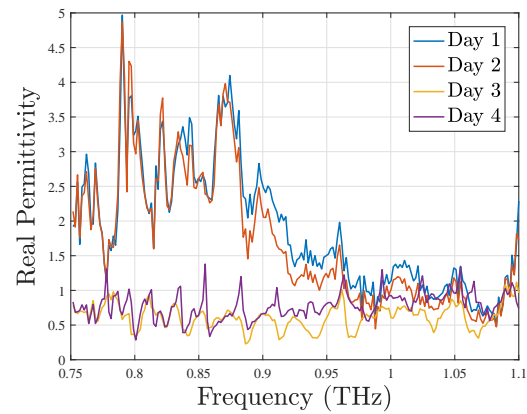

(b) Basil leaf

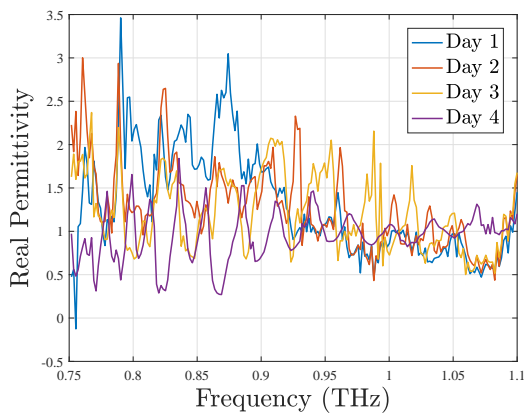

(c) Coffee Arabica

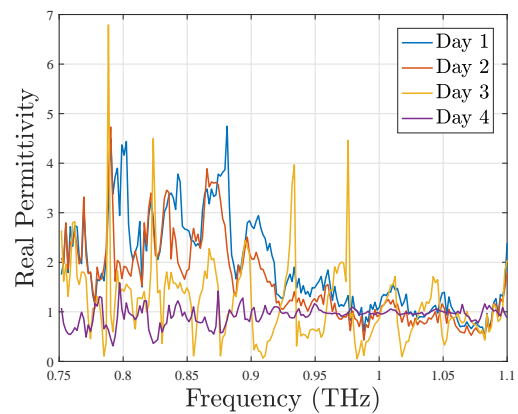

(d) Aromatic Coriander

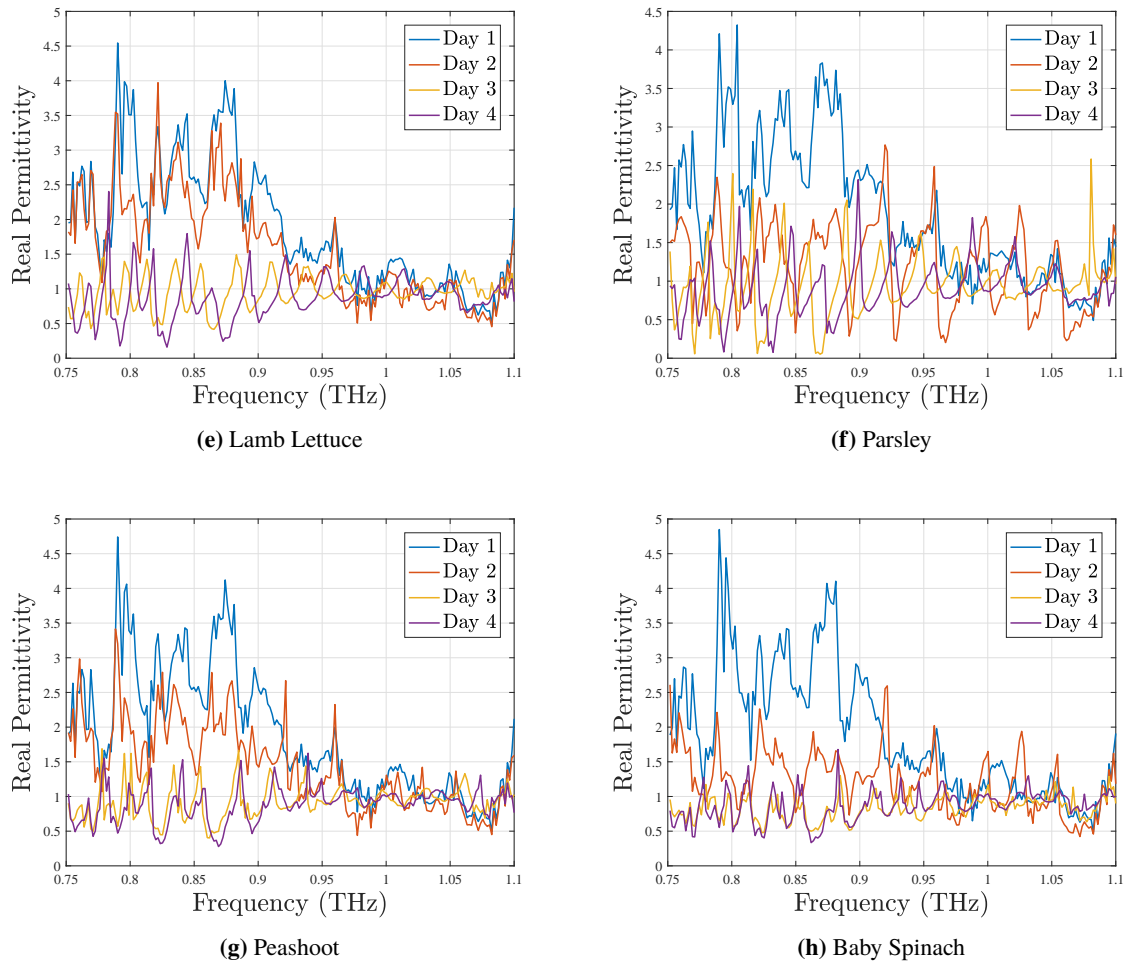


Figure 4. Real part of permittivity of all eight leaves measured on four consecutive days. Leaves become transparent to electromagnetic waves with the passage of days as seen by the decrease in the permittivity.

3.1. Permittivity of Leaves

In this study, the permittivity of eight different leaves were measured on three various locations with different percentage of water content in them. Furthermore, on every location, measurements were recorded using four different orientations of the leaves to observe any anisotropic behaviour. Figure 3 showed that the differences in permittivity were negligible regardless of the location and orientation.

It was observed that a coffee leaf, in particular, showed a similar pattern across all the three locations and the leaf surface irregularities deemed to be very negligible. Likewise, the rest of other leaves displayed a similar trend. The purpose of these findings was mainly to investigate any variations in the permittivity which could occur due to different locations on the leaves. Figure 4 showed the real part of the permittivity for all the leaves measured on four consecutive days. It was significant to observe that all the leaves revealed the highest permittivity on day 1 when the WC in fresh leaves were considerably high, and as the days passed, permittivity showed a decrement when leaves became water stressed. Hence, dielectric parameter measurements differed significantly on day 1 and 4 for fresh, and water-stressed leaves. From these observations, it also showed a clear correlation between the permittivity and WC of leaves, i.e. fresh leaves with a higher amount of WC would have a high permittivity and vice versa. From Figure 5, it was evidently observed that permittivity showed a strong decaying correlation with WC. With every passing day, water moisture had been kept evaporated and it eventually displayed an effect in electromagnetic properties of leaves. As observed in Figure 4, various leaves also showed distinctive decrement

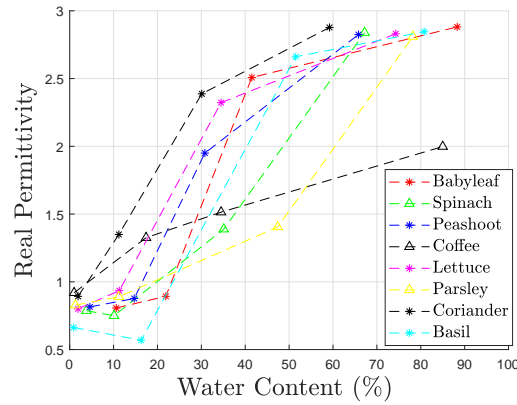


Figure 5. Correlation of permittivity with loss of WC in leaves.

responses from each other, also attributing to have physiological and biological process growth. In this process, specific values of permittivity were investigated with a water loss of leaves from day 1 to 4.

3.2. Estimation of Water Content in Leaves

In this study, WC in leaves was observed by determining the physical parameters such as weigh and thickness. Referring to the weights of leaves, initially on the first day, the time duration between the two weight measurements were maintained from two to three hours. On the second day, this was extended to four hours and finally, on the third and fourth day, it was increased to 6 hours. It was noted that there was significant decrement in the weights of some leaves as shown in Figure 6 on day 1, i.e. basil, baby leaf and pea shoot, whereas, other leaves displayed a slow decrement in weight loss of leaves as days progressed. This clearly indicated that the moisture in leaves

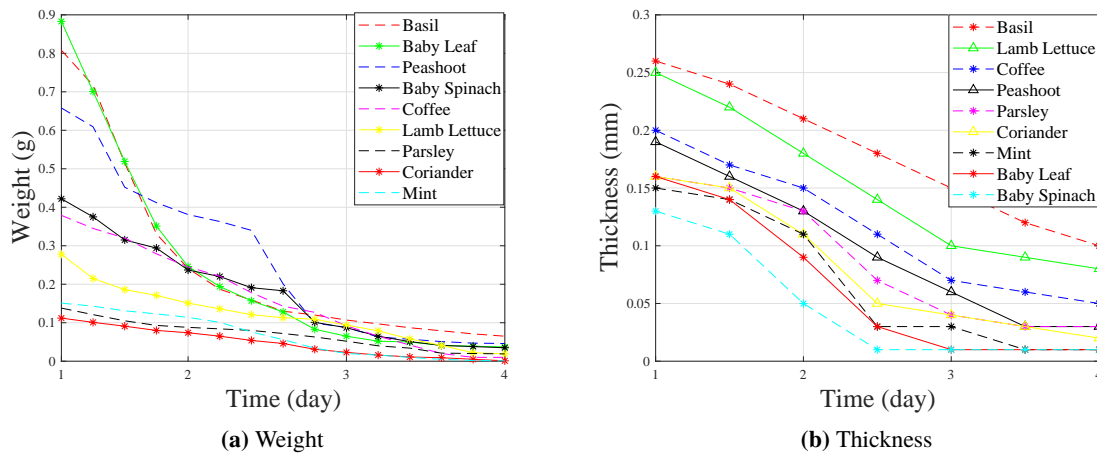


Figure 6. Change in the physical properties of leaves with time.

evaporated more rapidly on the day 1 and 2 compared to day 3 and 4, thereby creating more air cavities in the leaves. To assess the variation of leaf WC during the leaf's water evaporation process, the measurements were translated into WC using [17,31],

$$WC = \frac{W_{\text{time}} - W_{\text{dry}}}{W_{\text{fresh}}} \times 100 \quad (4)$$

where W_{fresh} is the weight of the fresh leaf, W_{time} is the weight of a leaf measured over time and W_{dry} is the weight of a dry leaf. In the beginning, the WC loss observed between the two hours on day 1 was found in the range of 5% to 22%. At the end of the investigation on day 4, this loss was increased during the natural evaporation of leaf moisture and was established in the range of 83.12% to 99.33%. The obtained percentages loss of WC can

be validated with Figure 6a. Considering this discussion, it also showed a significant correlation with the real part of the permittivity which was the highest on the first day when the weight of leaves was considerably high compared with the fourth day as shown in Figure 4. The thickness of all the leaves was carefully determined to avoid any excess pressure to the samples, that would cause disturbances in the morphological structure of the leaves, changing the dielectric properties of the samples as a result. As seen in Figure 6b, the thickness of leaves was considerably higher on day 1, implying a greater WC in fresh leaves compared to day 4 when mostly, all leaves were dried out. From this significant and meaningful observation, it was concluded that dehydration of water contents in leaves with passing days affected the thicknesses to a substantial degree. On day 4, some leaves stayed invariant or slight changes occurred in the thickness of leaves i.e. coriander and spinach as shown in Figure 6a. These transformations in the thickness of leaves evidently showed that WC in coriander and spinach leaves had evaporated to the maximum on day 4 and no further variations could be observed in thickness of leaves.

3.3. Evaluation of Leaf Transmission Response

In this section, transmission responses of all leaves were observed on day 1 and 4 as shown in Figure 7. It was noticed that on day 1, attenuations of all leaves were substantially high due to the presence of higher WC in tissues of leaves, which resulted in a higher absorption and lower transmission response. Moreover, on day 4, a substantial degree of increment in transmission response was observed as WC in leaves had evaporated to large extent, which resulted in a decrement of weight and thickness of leaves and eventually, less absorption occurred at this time. Figure 7 exhibited a strong correlation of transmission response with WC, weight and thickness of leaves. Baby-leaf exhibited a lower transmission response on day 1 compared to others, reflecting a higher presence of WC in leaf, which resulted in higher absorption. Contrarily, parsley displayed an increment in transmission response due to the presence of less WC in the leaf and, hence, producing low absorption compared to other leaves.

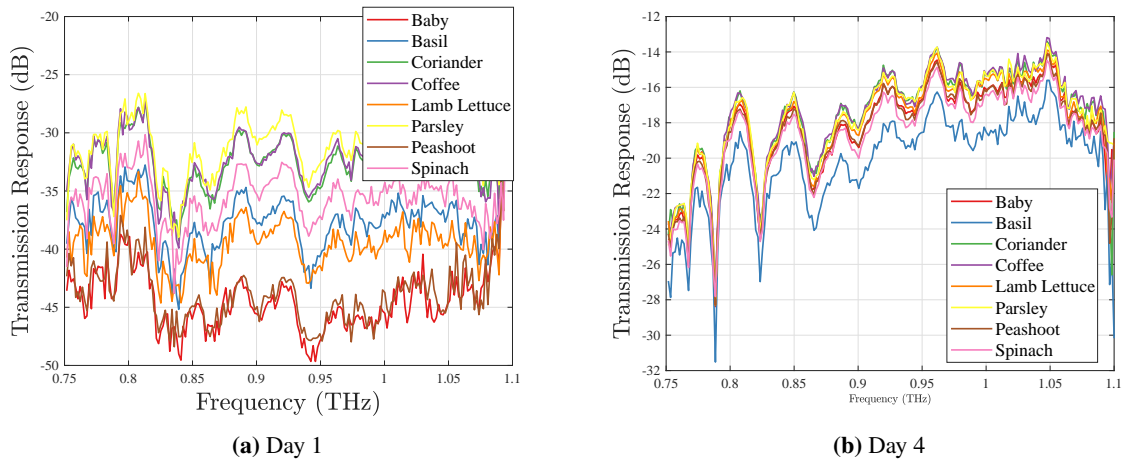


Figure 7. Transmission response of leaves on first and fourth days.

4. Conclusion

In this paper, a novel, non-invasive technique of characterizing the water content, and in turn the health of plant leaves was proposed using terahertz waves. The electromagnetic properties of eight types of leaves were determined for four consecutive days through the measured scattering parameters. The weight and thickness of the leaves were also recorded at the same time. We observed that the leaves became increasingly transparent to the terahertz waves through the course of four days experiment, as seen by the peaks of permittivity as well as the refractive index of the leaves. Similar decaying trends were observed in the peak values of the real part of the extracted relative permittivity as the decreasing weight due to loss of water content. In the age of a climate change driven water conservation, the proposed scheme can be used to design efficient irrigation systems on-site

without any need to remove the leaves from plants. The significance of this paper lies in the simple, cost-effective technique and other advantages such as: a) This paper proposes a unique technique to characterize and estimate WC of eight various leaves in terms of electromagnetic parameters at THz frequency range from 0.75 to 1.1 THz. b) The electromagnetic parameters are measured in simple, fast, and non-invasive manner using a terahertz material characterization kit. Moreover, The structural integrity and configuration of leaves were also considered by employing two Polytetrafluoroethylene (PTFE) caps which were fitted internally to the waveguide. c) This paper establishes a notable correlation between electromagnetic parameters with WC in leaves i.e. an increment or decrement in WC status of leaves is evidently reflected in electromagnetic parameters at certain frequencies.

Acknowledgment

Adnan Zahid is funded by EPSRC doctoral training programme. Sincere thanks to CSI members, School of Electronic and Nanoscale engineering department, University of Glasgow for their useful and valuable suggestions.

References

1. Afsharinejad, A.; Davy, A.; O'Leary, P.; Brenann, C. Transmission through Single and Multiple Layers of Plant Leaves at THz Frequencies. *GLOBECOM 2017 - 2017 IEEE Global Communications Conference*, 2017, pp. 1–6. doi:10.1109/GLOCOM.2017.8254561.
2. Federici, J.F.; Schulkin, B.; Huang, F.; Gary, D.; Barat, R.; Oliveira, F.; Zimdars, D. THz imaging and sensing for security applications—explosives, weapons and drugs. *Semiconductor Science and Technology* **2005**, *20*, S266.
3. Woodward, R.M.; Cole, B.E.; Wallace, V.P.; Pye, R.J.; Arnone, D.D.; Linfield, E.H.; Pepper, M. Terahertz pulse imaging in reflection geometry of human skin cancer and skin tissue. *Physics in Medicine & Biology* **2002**, *47*, 3853.
4. Smith, R.L. Diagnostic Modalities. *Clinical Orthopaedics and Related Research*® **2004**, *427*, S174.
5. Sun, Q.; He, Y.; Liu, K.; Fan, S.; Parrott, E.P.J.; Pickwell-MacPherson, E. Recent advances in terahertz technology for biomedical applications. *Quantitative Imaging in Medicine and Surgery* **2017**, *7*.
6. Naftaly, M.; Miles, R.E. Terahertz Time-Domain Spectroscopy for Material Characterization. *Proceedings of the IEEE* **2007**, *95*, 1658–1665. doi:10.1109/JPROC.2007.898835.
7. Kürner, T.; Priebe, S. Towards THz Communications - Status in Research, Standardization and Regulation. *Journal of Infrared, Millimeter, and Terahertz Waves* **2014**, *35*, 53–62. doi:10.1007/s10762-013-0014-3.
8. Zahid, A.; Yang, K.; Heidari, H.; Li, C.; Imran, M.A.; Alomainy, A.; Abbasi, Q.H. Terahertz characterisation of living plant leaves for quality of life assessment applications. 2018 Baltic URSI Symposium (URSI), 2018, pp. 117–120. doi:10.23919/URSI.2018.8406770.
9. Afsharinejad, A.; Davy, A.; Naftaly, M. Variability of Terahertz Transmission Measured in Live Plant Leaves. *IEEE Geoscience and Remote Sensing Letters* **2017**, *14*, 636–638. doi:10.1109/LGRS.2017.2667225.
10. Santesteban, L.G.; Palacios, I.; Miranda, C.; Iriarte, J.C.; Royo, J.B.; Gonzalo, R. Terahertz time domain spectroscopy allows contactless monitoring of grapevine water status. *Frontiers in Plant Science* **2015**, *6*, 1–9. doi:10.3389/fpls.2015.00404.
11. Torres, V.; Palacios, I.; Iriarte, J.C.; Liberal, I.; Santesteban, L.G.; Miranda, C.; Royo, J.B.; Gonzalo, R. Monitoring Water Status of Grapevine by Means of THz Waves. *Journal of Infrared, Millimeter, and Terahertz Waves* **2016**, *37*, 507–513. doi:10.1007/s10762-016-0269-6.
12. Jördens, C.; Scheller, M.; Breitenstein, B.; Selmar, D.; Koch, M. Evaluation of leaf water status by means of permittivity at terahertz frequencies. *Journal of biological physics* **2009**, *35*, 255–264.
13. Gente, R.; Born, N.; Velauthapillai, A.; Balzer, J.C.; Koch, M. Monitoring the water content of plant leaves with THz time domain spectroscopy. 2015 40th International Conference on Infrared, Millimeter, and Terahertz waves (IRMMW-THz), 2015, pp. 1–2. doi:10.1109/IRMMW-THz.2015.7327934.
14. Gente, R.; Koch, M. Monitoring leaf water content with THz and sub-THz waves. *Plant Methods* **2015**, *11*, 15. doi:10.1186/s13007-015-0057-7.

15. Born, N.; Behringer, D.; Liepelt, S.; Beyer, S.; Schwerdtfeger, M.; Ziegenhagen, B.; Koch, M. Monitoring Plant Drought Stress Response Using Terahertz Time-Domain Spectroscopy. *Plant Physiology* **2014**, *164*, 1571–1577. doi:10.1104/pp.113.233601.
16. Breitenstein, B.; Scheller, M.; Shakfa, M.K.; Kinder, T.; Müller-Wirts, T.; Koch, M.; Selmar, D. Introducing terahertz technology into plant biology: A novel method to monitor changes in leaf water status. *Journal of Applied Botany and Food Quality* **2011**, *84*, 158–161.
17. Nie, P.; Qu, F.; Lin, L.; Dong, T.; He, Y.; Shao, Y.; Zhang, Y. Detection of Water Content in Rapeseed Leaves Using Terahertz Spectroscopy. *Sensors* **2017**, *17*. doi:10.3390/s17122830.
18. Higa, S.; Kobori, H.; Tsuchikawa, S. Mapping of Leaf Water Content Using Near-Infrared Hyperspectral Imaging. *Appl. Spectrosc.* **2013**, *67*, 1302–1307.
19. Song, Z.; Yan, S.; Zang, Z.; Fu, Y.; Wei, D.; Cui, H.L.; Lai, P. Temporal and spatial variability of water status in plant leaves by Terahertz imaging. *IEEE Transactions on Terahertz Science and Technology* **2018**, *8*, 520–527. doi:10.1109/TTHZ.2018.2851922.
20. Sardans, J.; Peñuelas, J.; Lope-Piedrafita, S. Changes in water content and distribution in *Quercus ilex* leaves during progressive drought assessed by in vivo ¹H magnetic resonance imaging. *BMC Plant Biology* **2010**, *10*, 1–12. doi:10.1186/1471-2229-10-188.
21. Sarracanie, M.; Lapierre, C.D.; Salameh, N.; Waddington, D.E.J.; Witzel, T.; Rosen, M.S. Low-Cost High-Performance MRI. *Scientific Reports* **2015**, *5*, 1–9. doi:10.1038/srep15177.
22. Saha, S.C.; Grant, J.P.; Ma, Y.; Khalid, A.; Hong, F.; Cumming, D.R.S. Terahertz Frequency-Domain Spectroscopy Method for Vector Characterization of Liquid Using an Artificial Dielectric. *IEEE Transactions on Terahertz Science and Technology* **2012**, *2*, 113–122. doi:10.1109/TTHZ.2011.2177172.
23. Hadjiloucas, S.; Karatzas, L.S.; Bowen, J.W. Measurements of leaf water content using terahertz radiation. *IEEE Transactions on Microwave Theory and Techniques* **1999**, *47*, 142–149. doi:10.1109/22.744288.
24. de Cumis, U.S.; Xu, J.H.; Masini, L.; Degl'Innocenti, R.; Pingue, P.; Beltram, F.; Tredicucci, A.; Vitiello, M.S.; Benedetti, P.A.; Beere, H.E.; Ritchie, D.A. Terahertz confocal microscopy with a quantum cascade laser source. *Opt. Express* **2012**, *20*, 21924–21931. doi:10.1364/OE.20.021924.
25. Nicolson, A.M.; Ross, G.F. Measurement of the Intrinsic Properties of Materials by Time-Domain Techniques. *IEEE Transactions on Instrumentation and Measurement* **1970**, *19*, 377–382. doi:10.1109/TIM.1970.4313932.
26. Weir, W.B. Automatic Measurement of Complex Dielectric Constant and Permeability. *Proceedings of the IEEE* **1974**, *62*, 33–36. doi:10.1109/PROC.1974.9382.
27. Baker-Jarvis, J.; Vanzura, E.J.; Kissick, W.A. Improved technique for determining complex permittivity with the transmission/reflection method. *IEEE Transactions on Microwave Theory and Techniques* **1990**, *38*, 1096–1103. doi:10.1109/22.57336.
28. Costa, F.; Borgese, M.; Degiorgi, M.; Monorchio, A. Electromagnetic Characterisation of Materials by Using Transmission/Reflection (T/R) Devices. *Electronics* **2017**, *6*, 95. doi:10.3390/electronics6040095.
29. Luukkonen, O.; Maslovski, S.I.; Tretyakov, S.A. A Stepwise Nicolson–Ross–Weir-Based Material Parameter Extraction Method. *IEEE Antennas and Wireless Propagation Letters* **2011**, *10*, 1295–1298. doi:10.1109/LAWP.2011.2175897.
30. Boughriet, A.H.; Legrand, C.; Chapoton, A. Noniterative stable transmission/reflection method for low-loss material complex permittivity determination. *IEEE Transactions on Microwave Theory and Techniques* **1997**, *45*, 52–57. doi:10.1109/22.552032.
31. Cao, Z.; Wang, Q.; Zheng, C. Best hyperspectral indices for tracing leaf water status as determined from leaf dehydration experiments. *Ecological Indicators* **2015**, *54*, 96–107. doi:10.1016/j.ecolind.2015.02.027.

Sample Availability: Samples of the compounds are available from the authors.