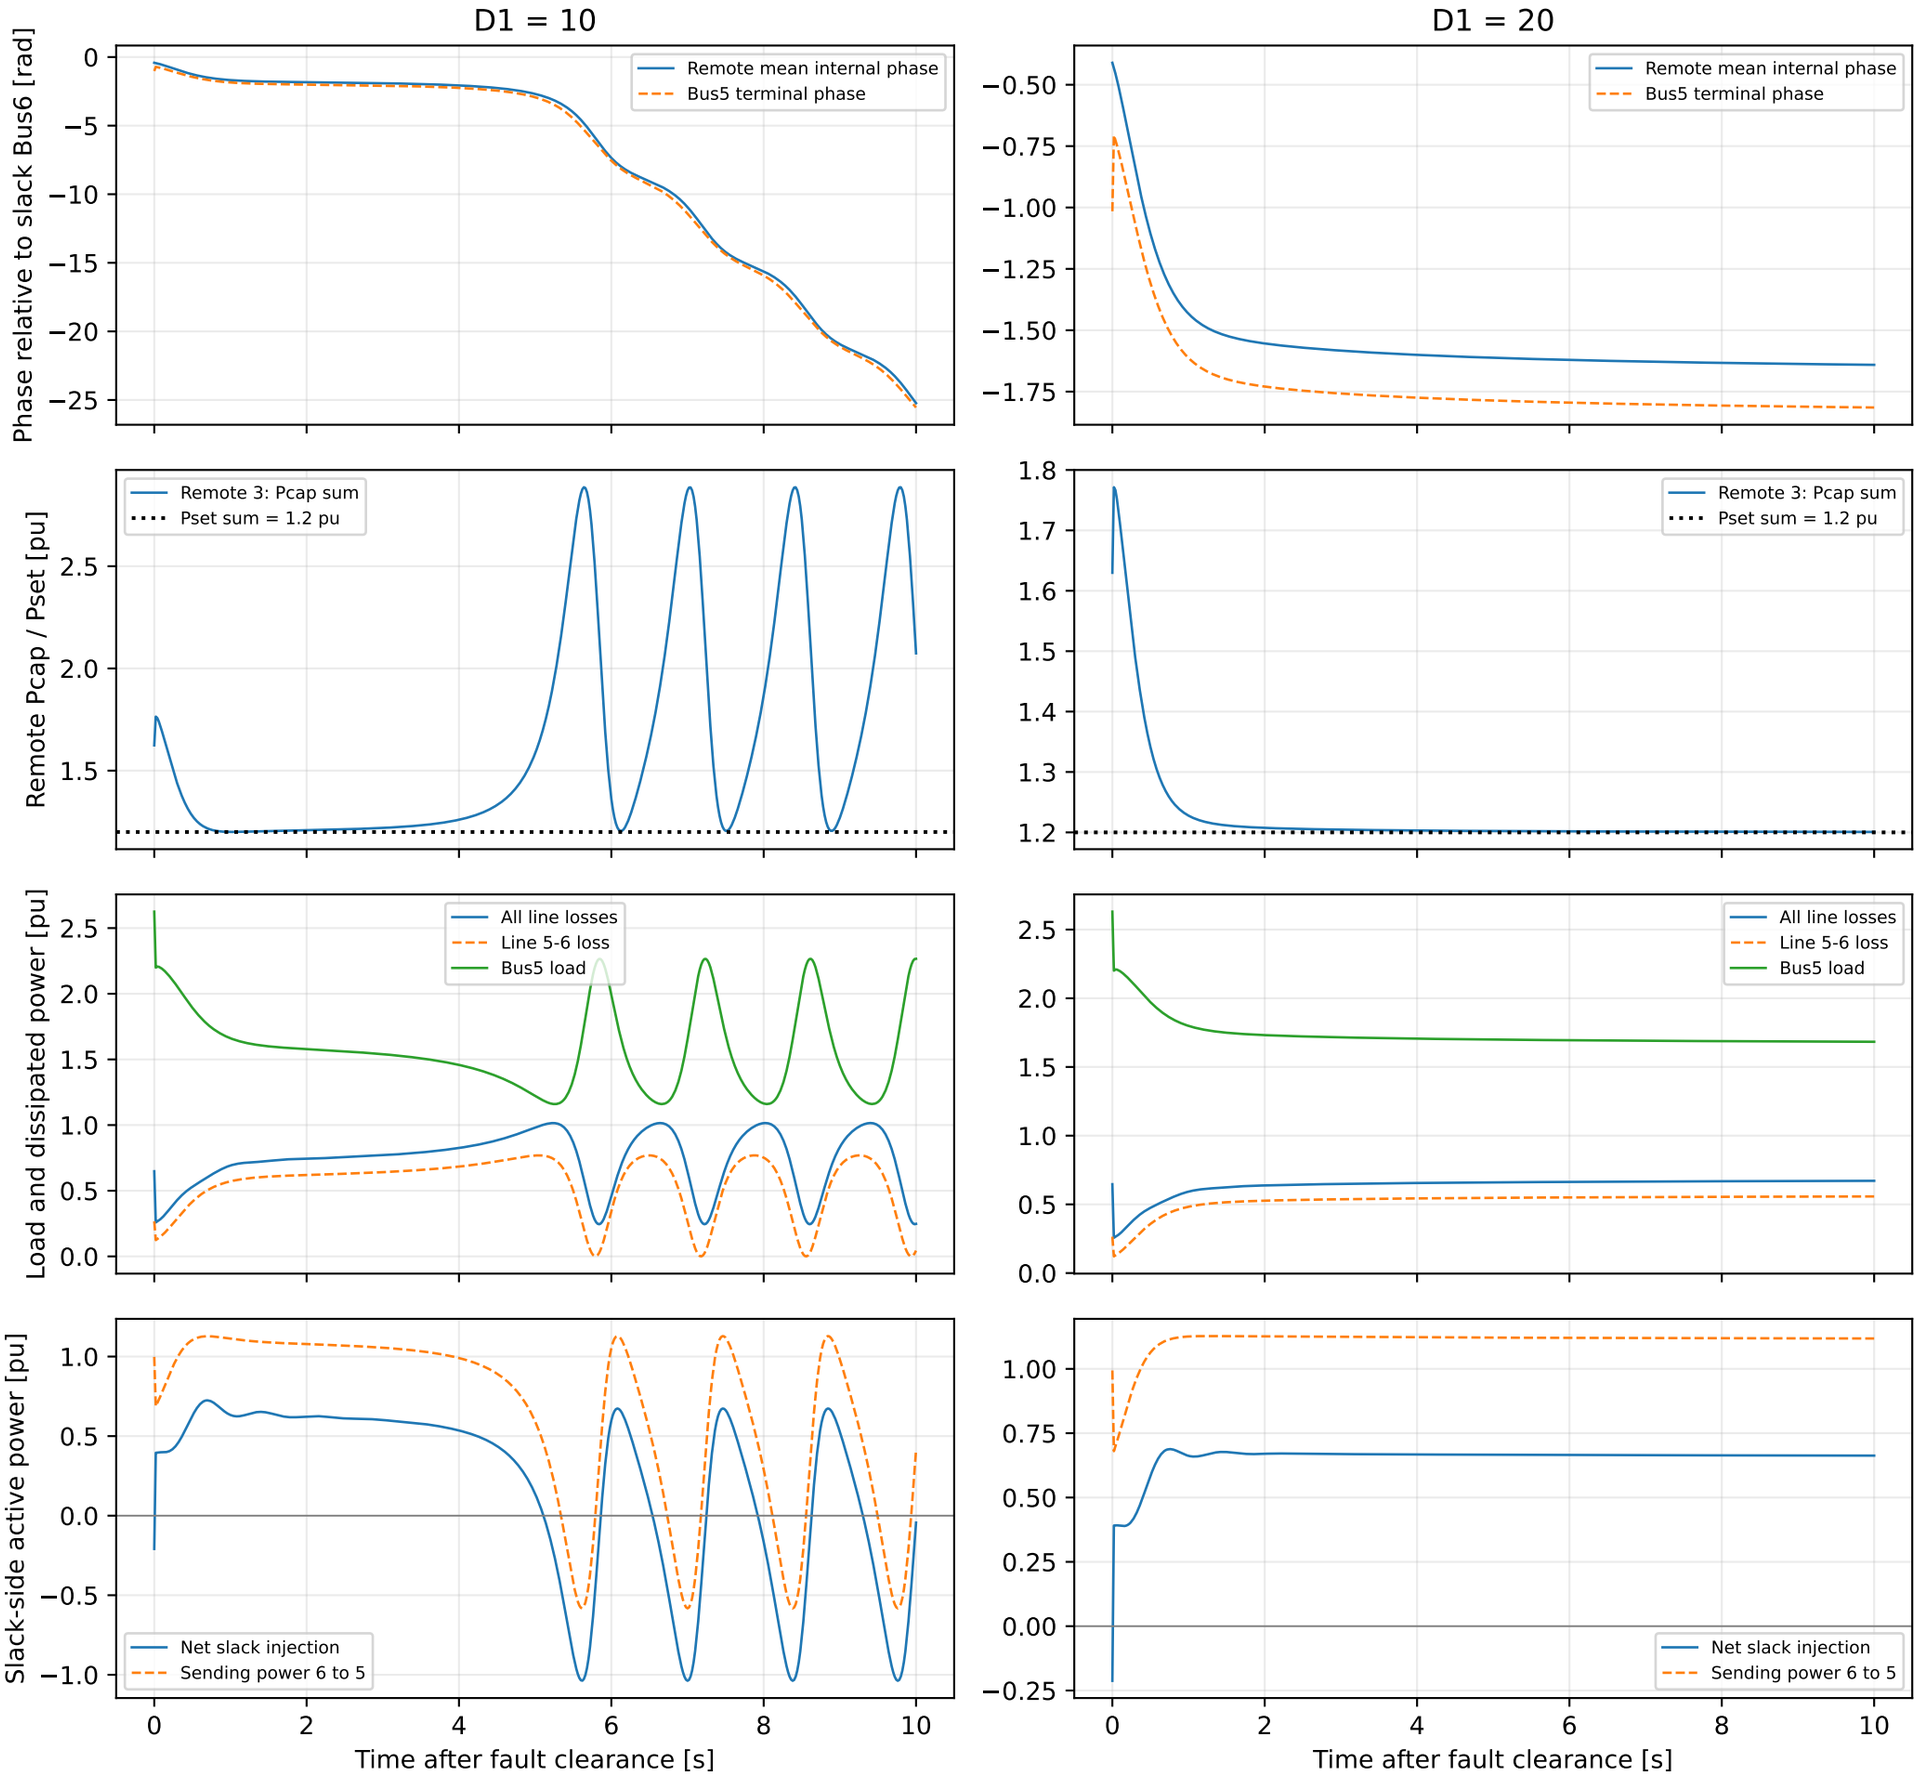
Power balance and negative-running mechanism: H=2.5 s, B5=1 pu
D1 = 10
D1 = 20
Phase relative to slack Bus6 [rad]
Remote mean internal phase
Bus5 terminal phase
Remote Pcap / Pset [pu]
Remote 3: Pcap sum
Pset sum = 1.2 pu
Load and dissipated power [pu]
All line losses
Line 5-6 loss
Bus5 load
Slack-side active power [pu]
Net slack injection
Sending power 6 to 5
Time after fault clearance [s]