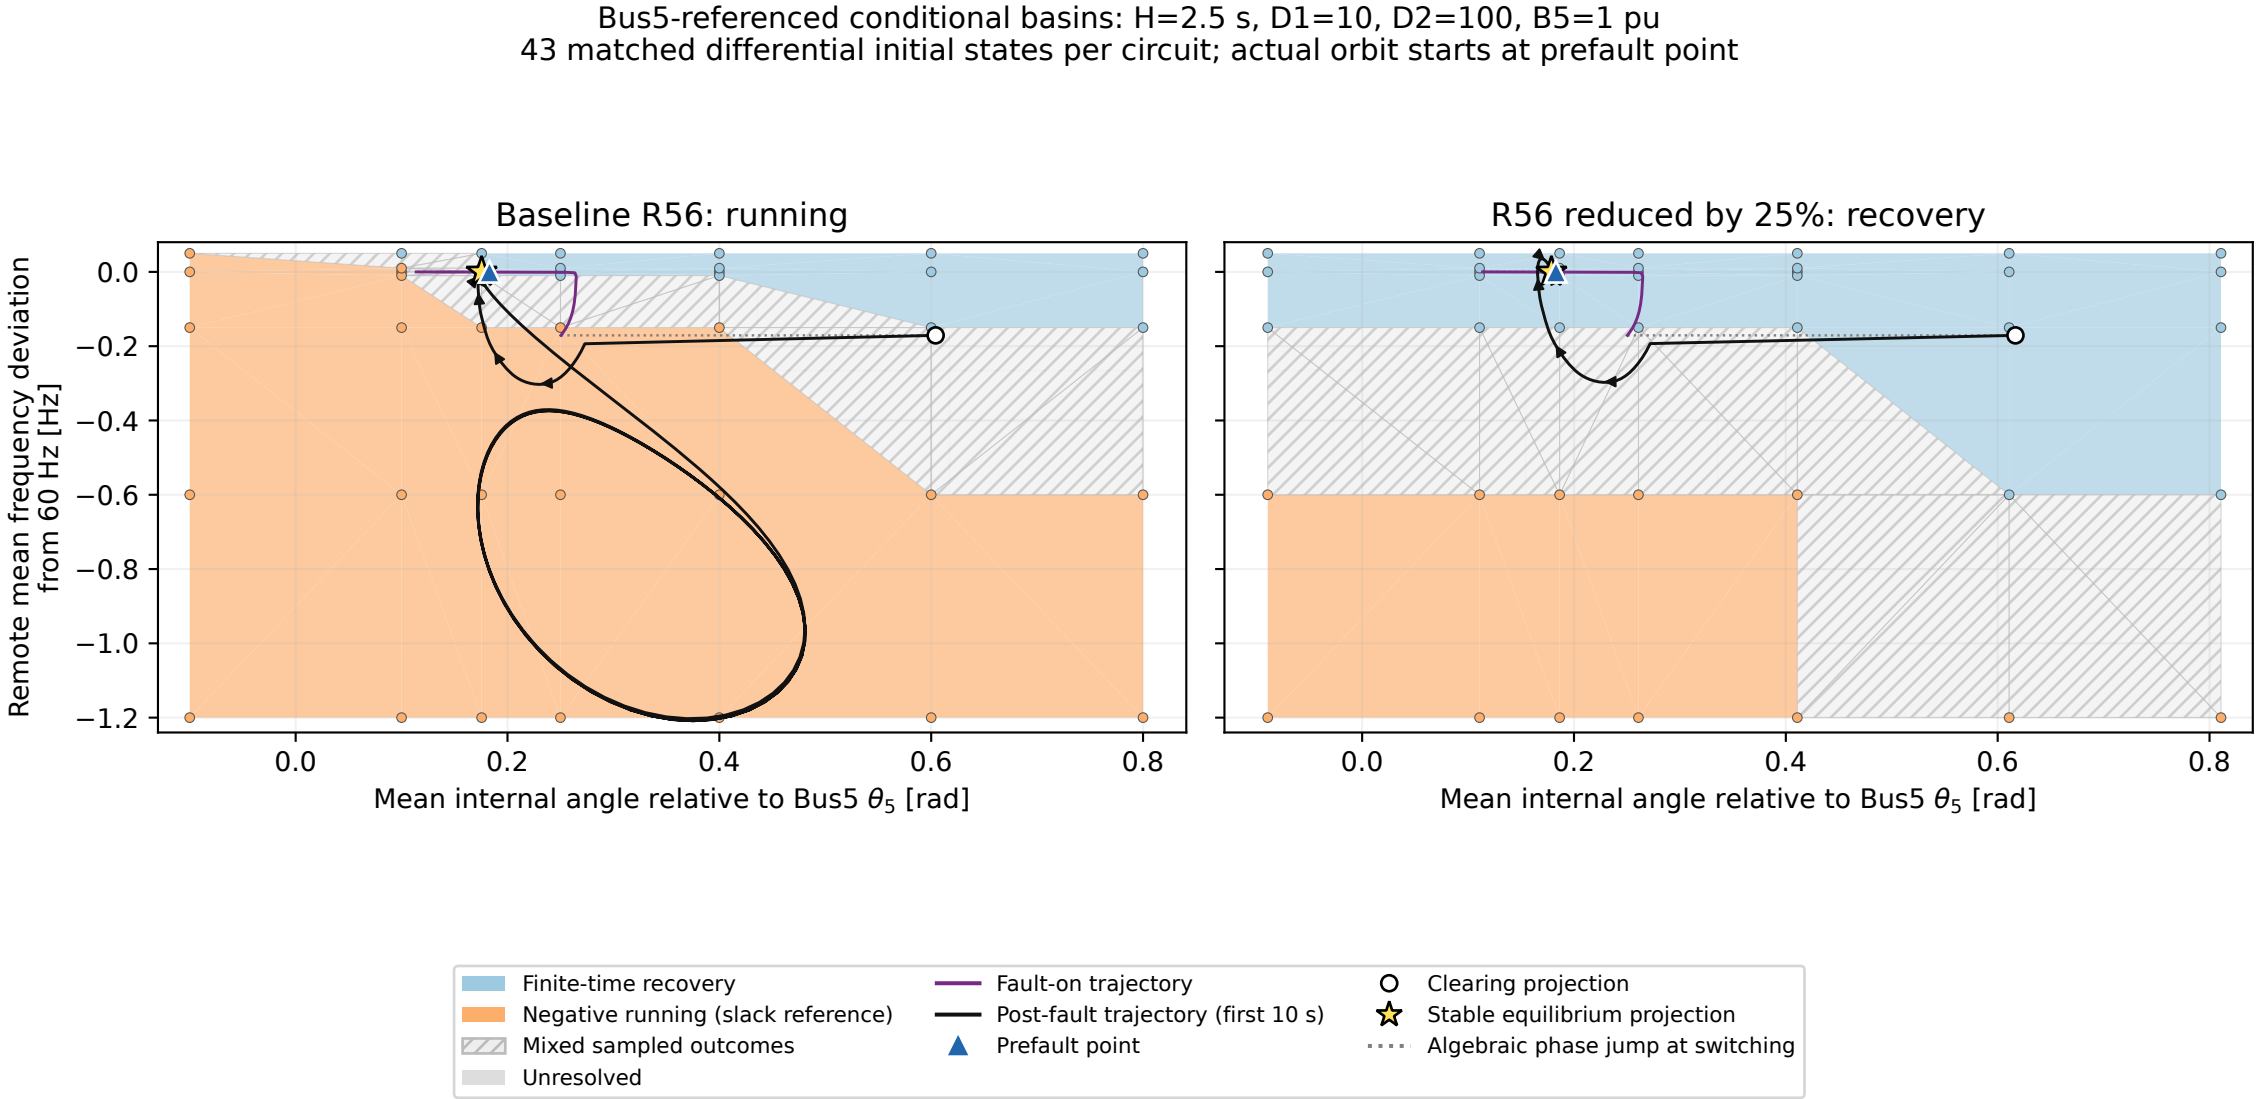
Bus5-referenced conditional basins: H=2.5 s, D1=10, D2=100, B5=1 pu
43 matched differential initial states per circuit; actual orbit starts at prefault point
Baseline R56: running
R56 reduced by 25%: recovery
Remote mean frequency deviation from 60 Hz [Hz]
0.0
−0.2
−0.4
−0.6
−0.8
−1.0
−1.2
0.0
0.2
0.4
0.6
0.8
Mean internal angle relative to Bus5 θ_5 [rad]
Finite-time recovery
Negative running (slack reference)
Mixed sampled outcomes
Unresolved
Fault-on trajectory
Post-fault trajectory (first 10 s)
Prefault point
Clearing projection
Stable equilibrium projection
Algebraic phase jump at switching