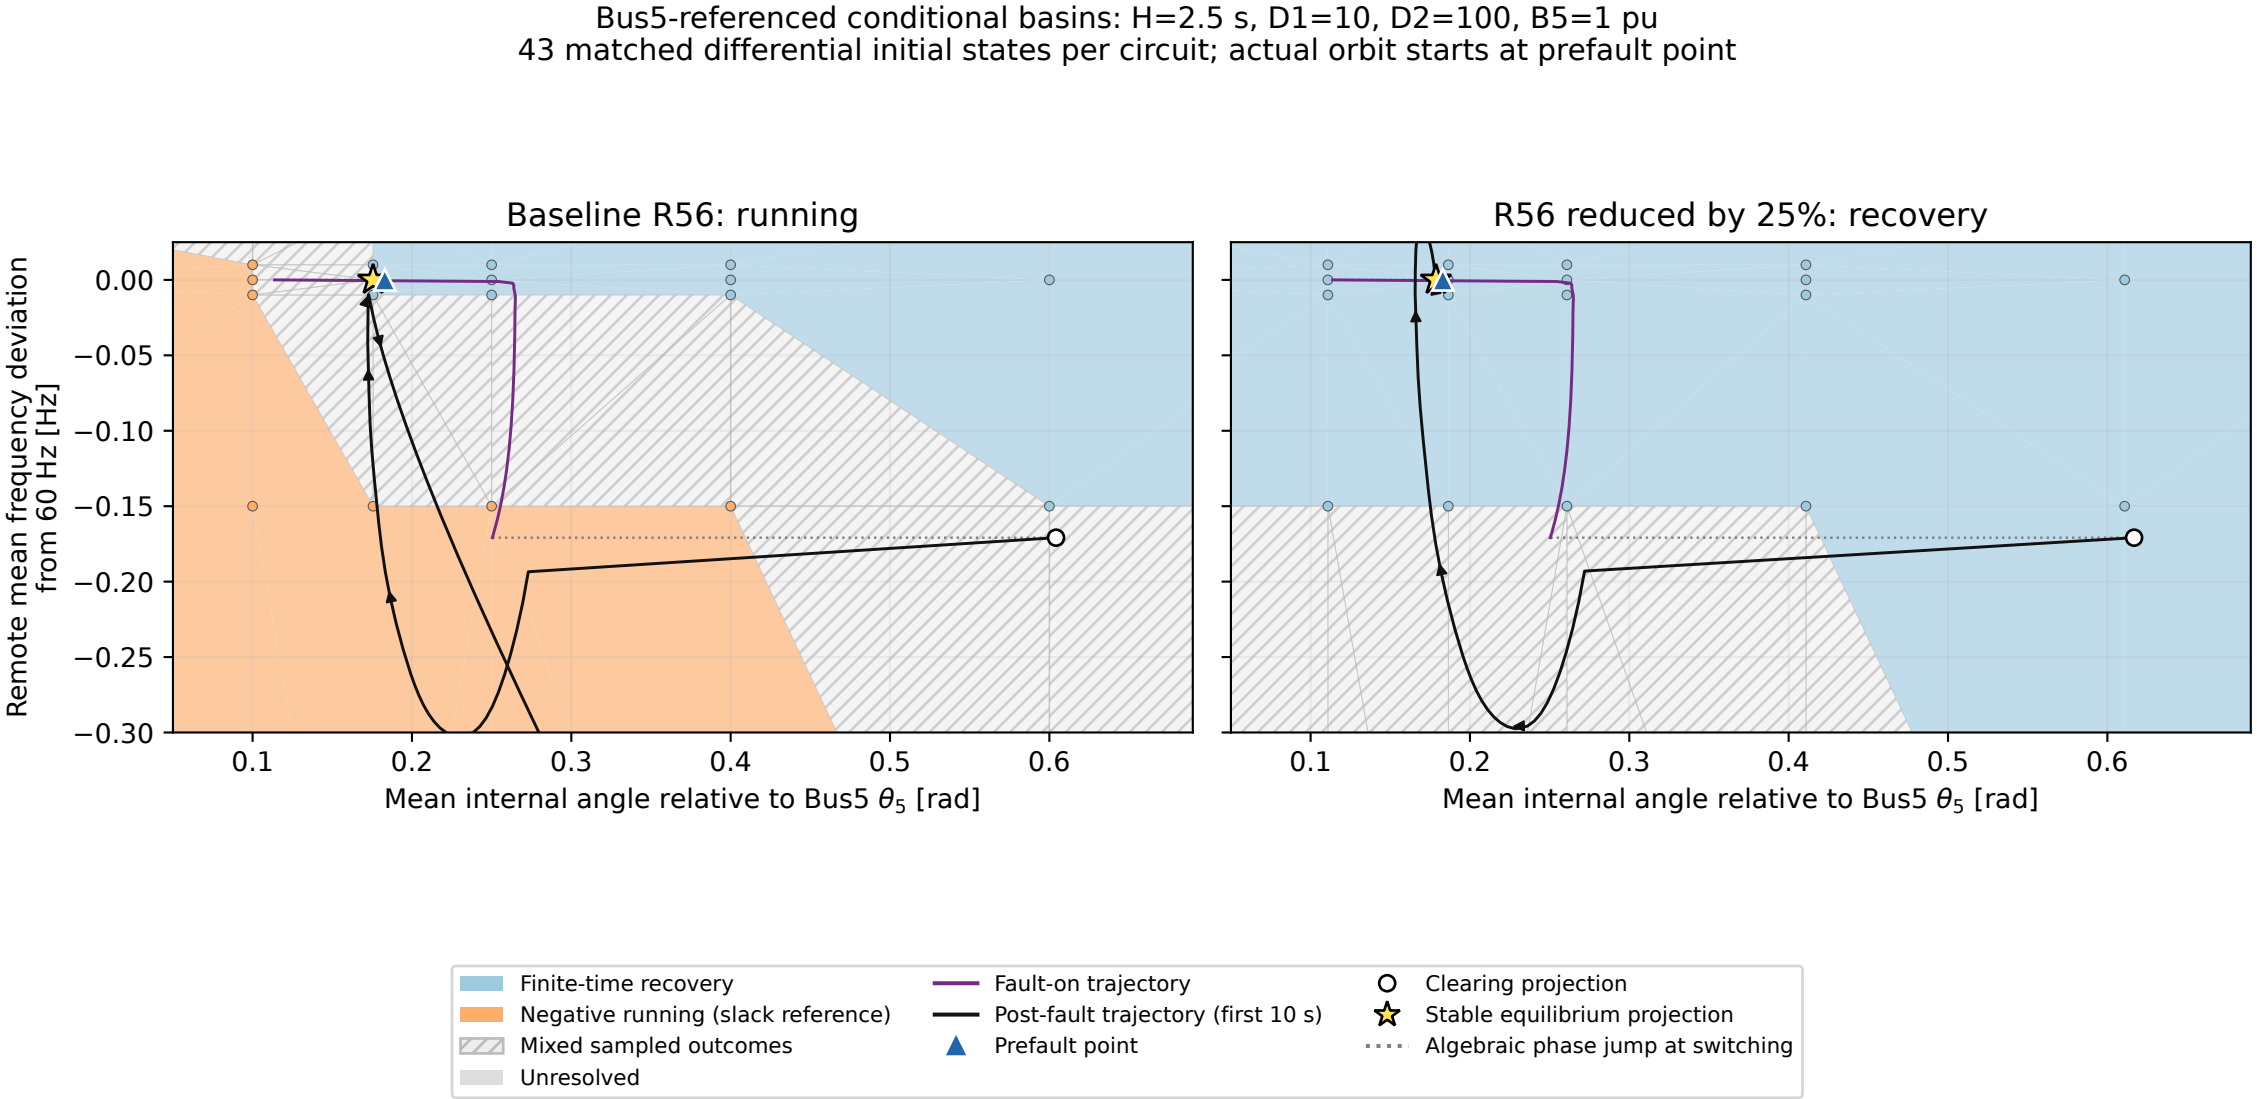
Bus5-referenced conditional basins: H=2.5 s, D1=10, D2=100, B5=1 pu
43 matched differential initial states per circuit; actual orbit starts at prefault point
Baseline R56: running
R56 reduced by 25%: recovery
Remote mean frequency deviation from 60 Hz [Hz]
0.00
−0.05
−0.10
−0.15
−0.20
−0.25
−0.30
0.1
0.2
0.3
0.4
0.5
0.6
Mean internal angle relative to Bus5 θ_5 [rad]
Finite-time recovery
Negative running (slack reference)
Mixed sampled outcomes
Unresolved
Fault-on trajectory
Post-fault trajectory (first 10 s)
Prefault point
Clearing projection
Stable equilibrium projection
Algebraic phase jump at switching