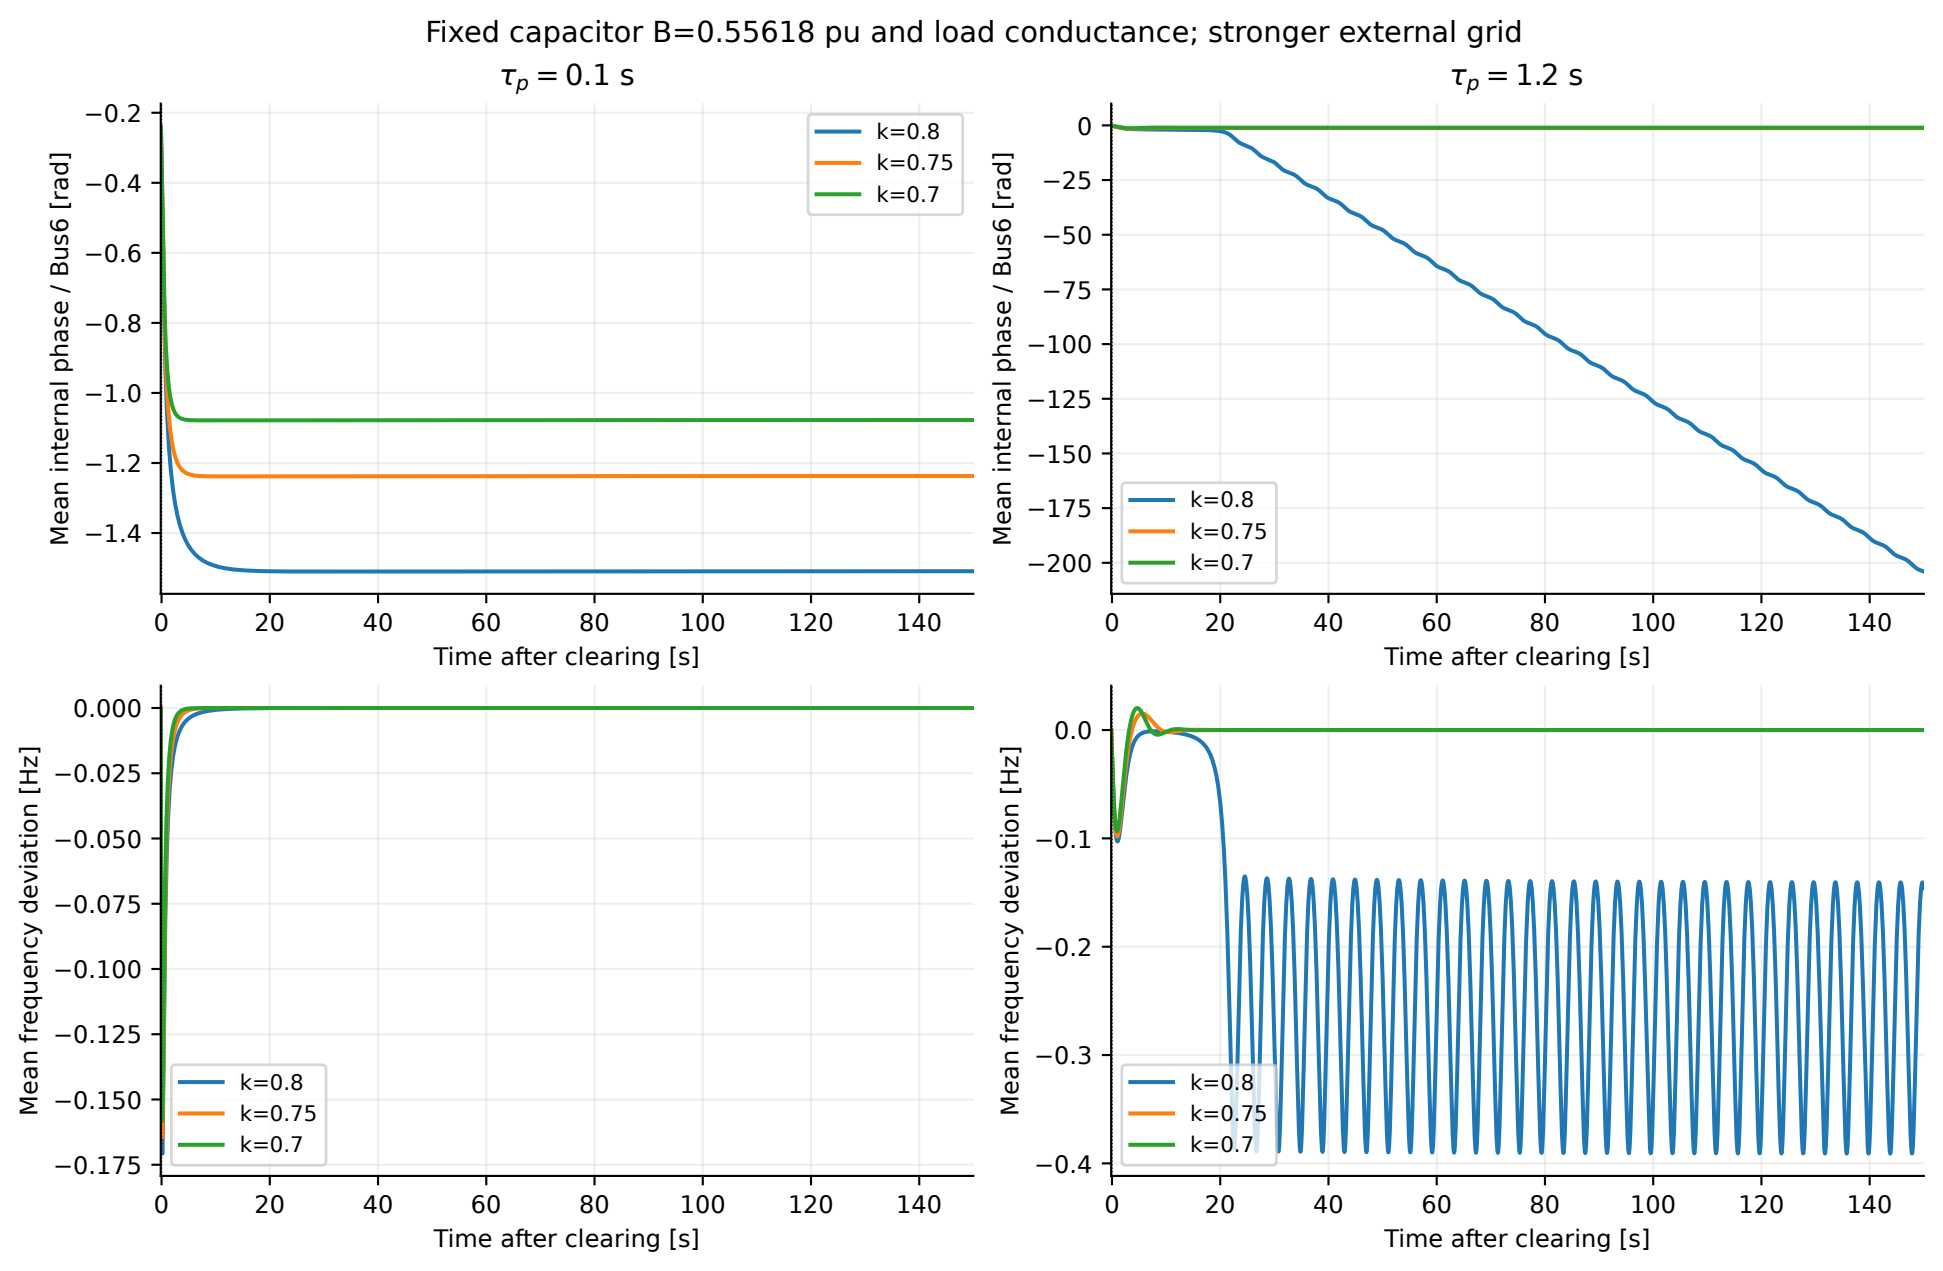
Fixed capacitor B=0.55618 pu and load conductance; stronger external grid
$\tau_p = 0.1$ s
$\tau_p = 1.2$ s
Mean internal phase / Bus6 [rad]
Mean frequency deviation [Hz]
Time after clearing [s]
k=0.8
k=0.75
k=0.7