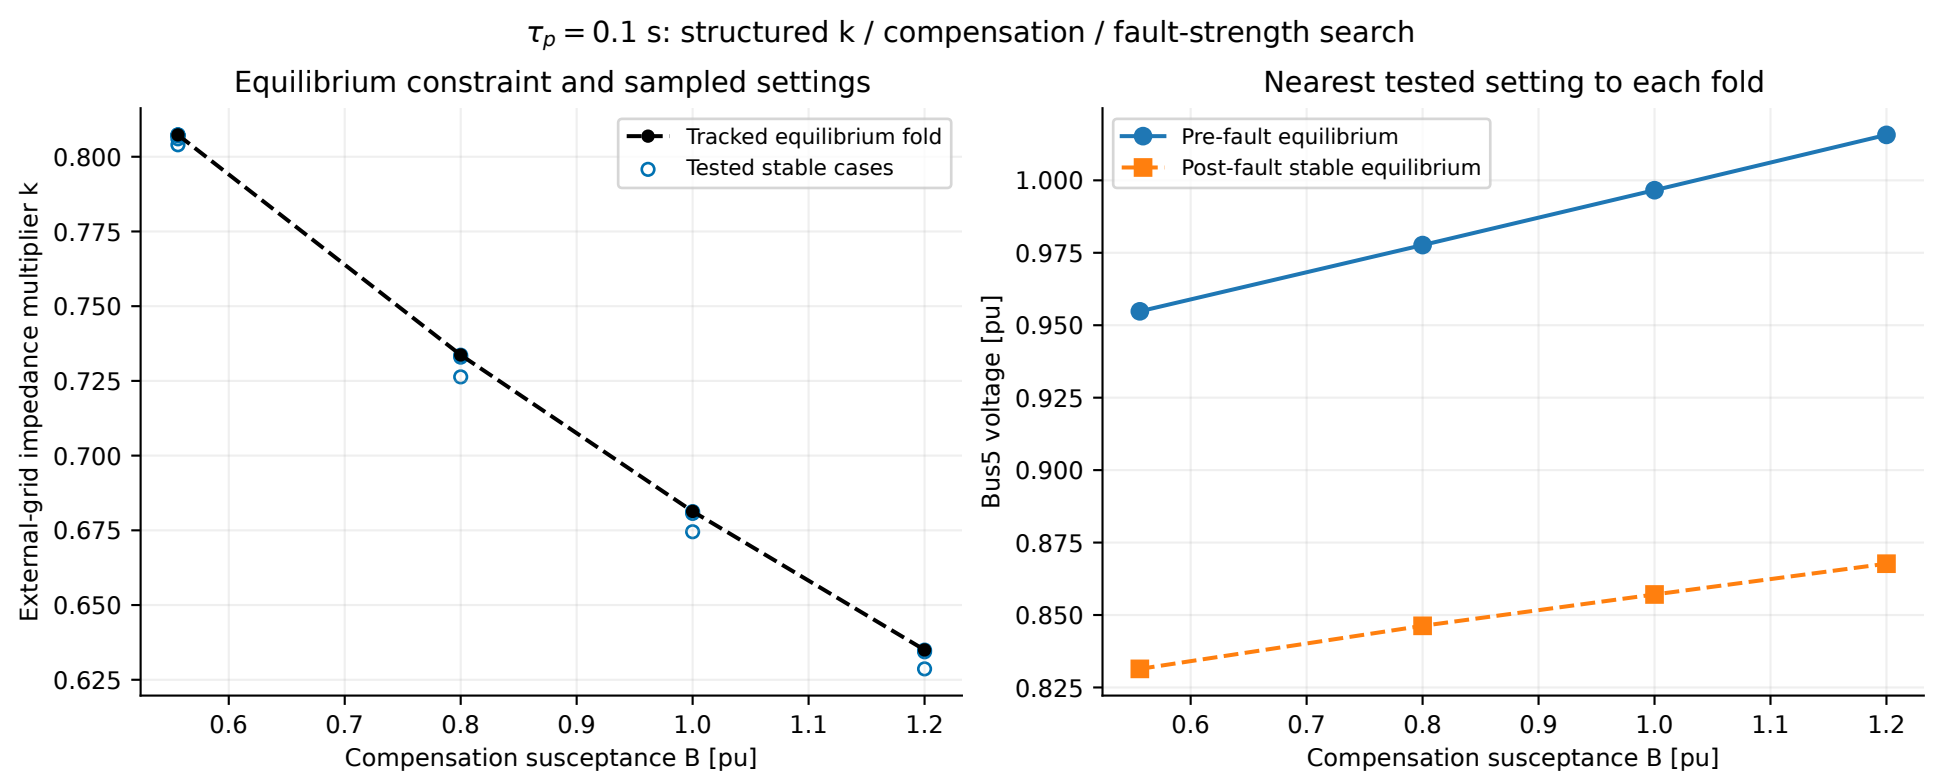
$\tau_p = 0.1$ s: structured k / compensation / fault-strength search
Equilibrium constraint and sampled settings
Tracked equilibrium fold
Tested stable cases
External-grid impedance multiplier k
0.800
0.775
0.750
0.725
0.700
0.675
0.650
0.625
0.6
0.7
0.8
0.9
1.0
1.1
1.2
Compensation susceptance B [pu]
Nearest tested setting to each fold
Pre-fault equilibrium
Post-fault stable equilibrium
Bus5 voltage [pu]
1.000
0.975
0.950
0.925
0.900
0.875
0.850
0.825
0.6
0.7
0.8
0.9
1.0
1.1
1.2
Compensation susceptance B [pu]
25 cases; outcome counts: recovery=25; 30-300 s finite observation.