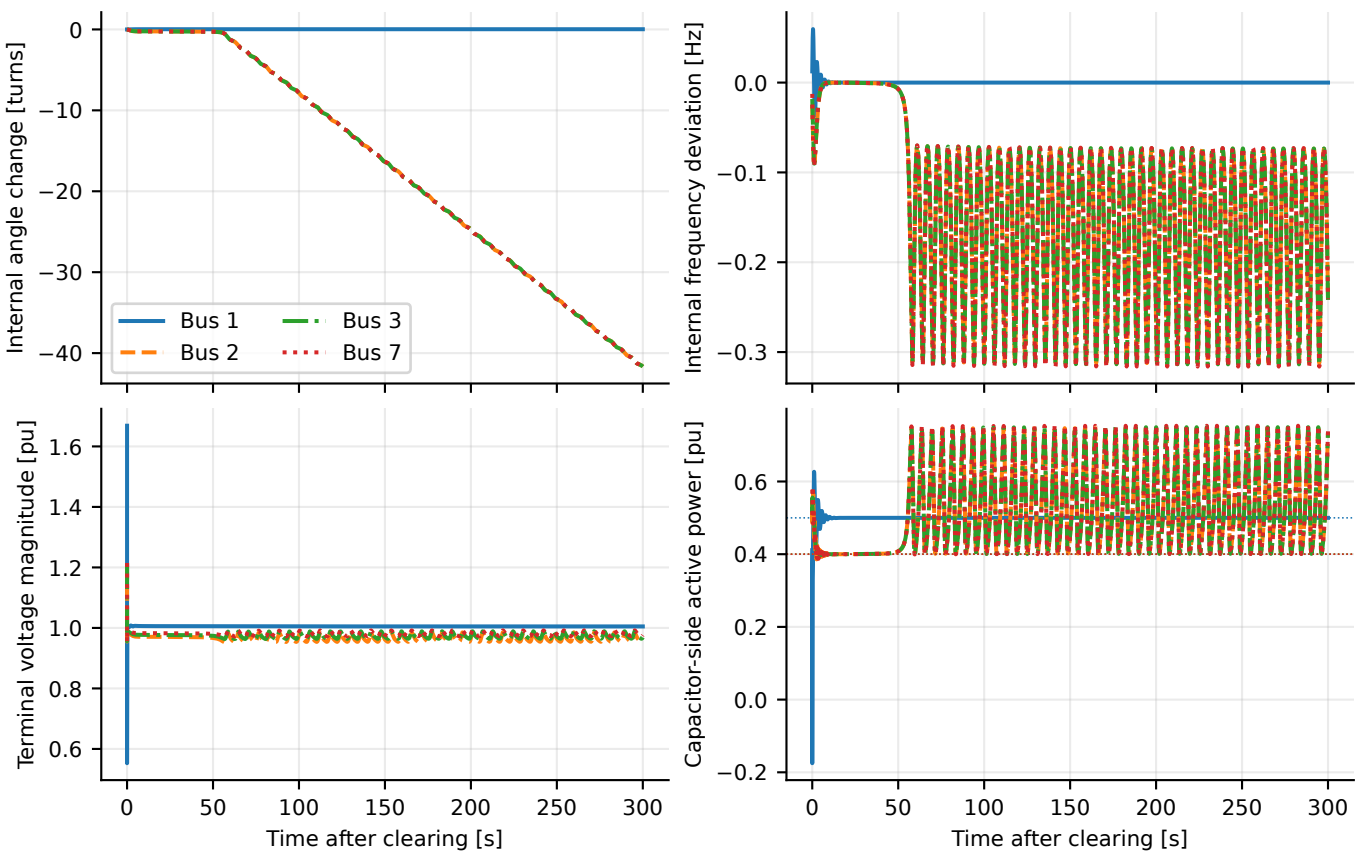

$\tau_p = 1.18$ s, $T = 0.15$ s
Internal angle change [turns]
Internal frequency deviation [Hz]
Terminal voltage magnitude [pu]
Capacitor-side active power [pu]
Time after clearing [s]
Time after clearing [s]
Bus 1
Bus 2
Bus 3
Bus 7